	CMLT3820G	Cent			
SU	RFACE MOUNT SILICON		wwv		
	VERY LOW V _{CE(SAT)}	DESCRIPTIO	N.		
	NPN TRANSISTOR		The CENTRAL SEMICONDUCTOF a very low V _{CE(SAT)} NPN Transist applications where small size and e prime requirements. Packaged in a		
	contrai	MARKING CODE: 38G			
	SOT-563 CASE				
APPLICATIONS:		FEATURES:			
• DC/DC (Converters	• Device is <i>Halogen Free</i> by desig			
Voltage		 High Current (IC=1.0A) 			
Protection Circuits		 V_{CE(SAT)}=0.28V MAX @ I_C=1.0 			
 Battery powered Cell Phones, Pagers, 		SOT563 surface mount package			
	ameras, PDAs, Laptops, etc.	Complementary PNP device CML			
MAXIMUM	RATINGS: (T _A =25°C)	SYMBOL			
Collector-Ba		V _{CBO}	80		
Collector-Er	nitter Voltage	VCEO	60		
Emitter-Bas	e Voltage	VEBO	5.0		
Continuous Collector Current		I _C	1.0		
Peak Collec	ctor Current	ICM	2.0		
Continuous Base Current		IB	300		
Power Dissipation		PD	250		
Operating and Storage Junction Temperature		TJ, Tstg	-65 to +150		
Thermal Re		Θ_{JA}	500		
ELECTRIC	AL CHARACTERISTICS: (T _A =25°C	unless otherwise no	oted)		
SYMBOL	TEST CONDITIONS	MIN	MAX		
СВО	V _{CB} =60V		100		
I _{EBO}	V _{EB} =5.0V	00	100		
BV _{CBO}	I _C =100μΑ I _C =10mA	80 60			
BVCEO		00			

w.centralsemi.com

R4 (29-June 2015)

R CMLT3820G is stor, designed for efficiency are the a space saving this component ics suitable for the applications.


AFFLICATIONS.		/				
DC/DC Converters		 Device is Halogen Free by design 				
 Voltage Clamping 		 High Current (IC=1.0A) 				
 Protection Circuits 		 V_{CE(SAT)}=0.28V MAX @ I_C=1.0A 				
 Battery powered Cell Phones, Pagers, 		SOT563 surface mount package				
Digital Cameras, PDAs, Laptops, etc.		Complementary PNP device CMLT7820G				
MAXIMUM RATINGS: (T _A =25°C)		SYMBOL		UNITS		
Collector-Base Voltage		V _{CBO}	80	V		
Collector-Emitter Voltage		VCEO	60	V		
Emitter-Base	Emitter-Base Voltage		5.0	V		
Continuous (Continuous Collector Current		1.0	А		
Peak Collector Current		I _С IСМ	2.0	А		
Continuous Base Current		IB	300	mA		
Power Dissipation		PD	250	mW		
Operating ar	Operating and Storage Junction Temperature		-65 to +150	°C		
Thermal Resistance		Τ _J , T _{stg} ^Θ JA	500	°C/W		
ELECTRICA	L CHARACTERISTICS: (T _A =25°C u	unless otherwise no	oted)			
SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS		
I _{CBO}	V _{CB} =60V		100	nA		
I _{EBO}	V _{EB} =5.0V		100	nA		
BVCBO	Ι _C =100μΑ	80		V		
BVCEO	I _C =10mA	60		V		
BVEBO	Ι _Ε =100μΑ	5.0		V		
V _{CE(SAT)}	I _C =100mA, I _B =1.0mA		0.115	V		
V _{CE(SAT)}	I _C =500mA, I _B =50mA		0.15	V		
V _{CE(SAT)}	I _C =1.0A, I _B =100mA		0.28	V		
V _{BE(SAT)}	I _C =1.0A, I _B =50mA		1.1	V		
V _{BE(ON)}	V _{CE} =5.0V, I _C =1.0A		0.9	V		
h _{FE}	V _{CE} =5.0V, I _C =1.0mA	200				
h _{FE}	V _{CE} =5.0V, I _C =500mA	200				
h _{FE}	V _{CE} =5.0V, I _C =1.0A	100				
f _T	V _{CF} =10V, I _C =50mA	150		MHz		
C _{ob}	V _{CB} =10V, I _E =0, f=1.0MHz		10	pF		



CMLT3820G

SURFACE MOUNT SILICON VERY LOW V_{CE(SAT)} NPN TRANSISTOR

SOT-563 CASE - MECHANICAL OUTLINE

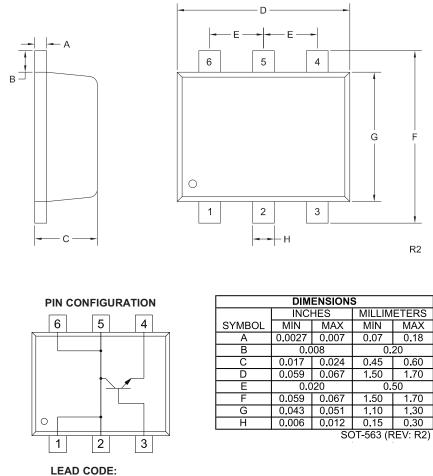

Collector
 Collector
 Base
 Emitter
 Collector
 Collector
 Collector
 Collector
 Pins 1, 2, 5 and 6 are common.

MARKING CODE: 38G

R4 (29-June 2015)

www.centralsemi.com

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options

- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities

- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp. 145 Adams Avenue Hauppauge, NY 11788 USA Main Tel: (631) 435-1110 Main Fax: (631) 435-1824 Support Team Fax: (631) 435-3388 www.centralsemi.com

Worldwide Field Representatives: www.centralsemi.com/wwreps

Worldwide Distributors: www.centralsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: <u>www.centralsemi.com/terms</u>

www.centralsemi.com



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - BJT category:

Click to view products by Central Semiconductor manufacturer:

Other Similar products are found below :

619691C MCH4017-TL-H BC546/116 BC557/116 BSW67A NTE158 NTE187A NTE195A NTE2302 NTE2330 NTE63 C4460 2SA1419T-TD-H 2SA1721-O(TE85L,F) 2SA2126-E 2SB1204S-TL-E 2SC5488A-TL-H 2SD2150T100R SP000011176 FMMTA92QTA 2N2369ADCSM 2N5769 2SC2412KT146S 2SC5490A-TL-H 2SD1816S-TL-E 2SD1816T-TL-E CMXT2207 TR CPH6501-TL-E MCH4021-TL-E US6T6TR NJL0281DG 732314D CMXT3906 TR CPH3121-TL-E CPH6021-TL-H 873787E IMZ2AT108 UMX21NTR MCH6102-TL-E NJL0302DG 2N3583 2SA1434-TB-E 2SC3143-4-TB-E 2SD1621S-TD-E NTE103 30A02MH-TL-E NSV40301MZ4T1G NTE101 NTE13 NTE15