

FEATURES:

- · High current capability
- Flammability classification UL94V-0
- · High reliability

 V_{F}

Сј

Central Semiconductor Corp.

www.centralsemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMSH3-20MA series 3.0 Amp surface mount silicon Schottky rectifier is a well constructed, highly reliable component designed for use in all types of commercial, industrial, entertainment, computer, and automotive applications.

MARKING CODE: SEE MARKING CODE TABLE ON FOLLOWING PAGE

0.85

280

	MARINOW RATINGS. (1A-25 C unless otherwise noted)							
		SYMBOL	CMSH3	CMSH3	CMSH3	CMSH3		
			<u>-20MA</u>	<u>-40MA</u>	<u>-60MA</u>	<u>-100MA</u>	UNITS	
Peak Repetitive Reverse Voltage		V _{RRM}	20	40	60	100	V	
DC Blocking Voltage		VR	20	40	60	100	V	
RMS Reverse Voltage		V _{R(RMS)}	14	28	42	71	V	
Average Forward Current (T _L =75°C)		IO		3.0			А	
Peak Forward Surge Current, tp=8.3ms		IFSM		80			А	
Operating and Storage Junction Temperature		T _J , T _{stg}		-65 to +150			°C	
Thermal Resistance		ΘJL	30			°C/W		
ELECTRICA	L CHARACTERISTICS: (T _A =25°C	unless otherw	vise noted)					
SYMBOL	TEST CONDITIONS		TYP	E C	XAN	UNITS		
I _R	V _R =Rated V _{RRM}				500	μA		
I _R	V _R =Rated V _{RRM,} T _A =100°C				20	mA		
V _F	I _F =3.0A (CMSH3-20MA, -40MA)			(0.50	V		
V _F	I _F =3.0A (CMSH3-60MA)			(0.70	V		
Peak Forward Surge Current, tp=8.3msOperating and Storage Junction TemperatureThermal ResistanceELECTRICAL CHARACTERISTICS: $(T_A=25^{\circ}C \text{ urres})$ SYMBOLTEST CONDITIONSIRVR=Rated VRRMIRVR=Rated VRRM, TA=100^{\circ}CVFIF=3.0A (CMSH3-20MA, -40MA)		^I FSM T _J , T _{stg} Θ _{JL}	,	-65 I	80 to +150 30 MAX 500 20 0.50	μA mA V	A °C	

MAXIMUM RATINGS: (T_A=25°C unless otherwise noted)

I_F=3.0A (CMSH3-100MA)

V_R=4.0V, f=1.0MHz

R3 (6-May 2015)


V

pF



CMSH3-20MA CMSH3-60MA CMSH3-40MA CMSH3-100MA

SURFACE MOUNT SILICON SCHOTTKY RECTIFIERS 3.0 AMP, 20 THRU 100 VOLT

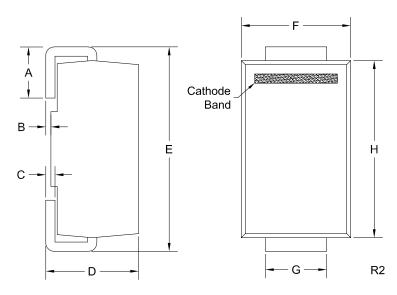

SMA CASE - MECHANICAL OUTLINE

DEVICE	MARKING CODE
CMSH3-20MA	CS320MA
CMSH3-40MA	CS340MA
CMSH3-60MA	CS360MA
CMSH3-100MA	CS3100MA

DIMENSIONS									
	INCHES		MILLIMETERS						
SYMBOL	MIN	MAX	MIN	MAX					
A	0.030	0.060	0.76	1.52					
В	0.004	0.008	0.10	0.20					
С	0.006	0.012	0.15	0.30					
D	0.078	0.103	1.98	2.62					
E	0.188	0.220	4.78	5.59					
F	0.090	0.115	2.29	2.92					
G	0.050	0.070	1.27	1.78					
Н	0.157	0.181	3.99	4.60					
SMA (REV: R2)									

R3 (6-May 2015)

www.centralsemi.com

CMSH3-20MA CMSH3-60MA CMSH3-40MA CMSH3-100MA



SURFACE MOUNT SILICON SCHOTTKY RECTIFIERS 3.0 AMP, 20 THRU 100 VOLT

SERVICES

- · Bonded Inventory
- Custom Electrical Screening
- Custom Electrical Characteristic Curves
- SPICE Models
- Custom Packaging
- Package Base Options
- Custom Device Development/Multi Discrete Modules (MDM™)
- Bare Die Available for Hybrid Applications

LIMITATIONS AND DAMAGES DISCLAIMER: In no event shall Central be liable for any collateral, indirect, punitive, incidental, consequential, or exemplary damages in connection with or arising out of a purchase order or contract or the use of products provided hereunder, regardless of whether Central has been advised of the possibility of such damages. Excluded damages shall include, but not be restricted to: cost of removal or reinstallation, rework, ancillary costs to the procurement of substitute products, loss of profits, loss of savings, loss of use, loss of data, or business interruption. No claim, suit, or action shall be brought against Central more than two (2) years after the related cause of action has occurred.

In no event shall Central's aggregate liability from any warranty, indemnity, or other obligation arising out of or in connection with a purchase order or contract, or any use of any Central product provided hereunder, exceed the total amount paid to Central for the specific products sold under a purchase order or contract with respect to which losses or damages are claimed. The existence of more than one (1) claim against the specific products sold to Buyer under a purchase order or contract shall not enlarge or extend this limit.

Buyer understands and agrees that the foregoing liability limitations are essential elements of a purchase order or contract and that in the absence of such limitations, the material and economic terms of the purchase order or contract would be substantially different.

R3 (6-May 2015)

www.centralsemi.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Schottky Diodes & Rectifiers category:

Click to view products by Central Semiconductor manufacturer:

Other Similar products are found below :

MA4E2039 D1FH3-5063 MBR10100CT-BP MBR1545CT MMBD301M3T5G RB160M-50TR RB551V-30 BAS16E6433HTMA1 BAT 54-02LRH E6327 NSR05F40QNXT5G NTE555 JANS1N6640 SB07-03C-TB-H SK310-T SK32A-LTP SK33A-TP SK34B-TP SS3003CH-TL-E GA01SHT18 CRS10I30A(TE85L,QM MA4E2501L-1290 MBRA140TRPBF MBRB30H30CT-1G SB007-03C-TB-E SK32A-TP SK33B-TP SK35A-TP SK38B-TP NRVBM120LT1G NTE505 NTSB30U100CT-1G SS15E-TP VS-6CWQ10FNHM3 ACDBA1100LR-HF ACDBA1200-HF ACDBA140-HF ACDBA2100-HF ACDBA3100-HF CDBQC0530L-HF CDBQC0240LR-HF ACDBA340-HF ACDBA260LR-HF ACDBA1100-HF SK310B-TP MA4E2502L-1246 MA4E2502H-1246 NRVBM120ET1G NSR01L30MXT5G NTE573 NTE6081