

**CMST2222A**

**SURFACE MOUNT  
NPN SILICON TRANSISTOR**

**SUPERmini™**



**SOT-323 CASE**



[www.centralsemi.com](http://www.centralsemi.com)

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CMST2222A type is an NPN silicon transistor manufactured by the epitaxial planar process, epoxy molded in a surface mount package, designed for small signal, general purpose and switching applications.

**MARKING CODE: 1PC**

**MAXIMUM RATINGS: ( $T_A=25^\circ\text{C}$ )**

	<b>SYMBOL</b>	<b>UNITS</b>
Collector-Base Voltage	$V_{CBO}$	V
Collector-Emitter Voltage	$V_{CEO}$	V
Emitter-Base Voltage	$V_{EBO}$	V
Continuous Collector Current	$I_C$	mA
Power Dissipation	$P_D$	mW
Operating and Storage Junction Temperature	$T_J, T_{stg}$	${}^\circ\text{C}$
Thermal Resistance	$\Theta_{JA}$	${}^\circ\text{C}/\text{W}$

**ELECTRICAL CHARACTERISTICS: ( $T_A=25^\circ\text{C}$  unless otherwise noted)**

<b>SYMBOL</b>	<b>TEST CONDITIONS</b>	<b>MIN</b>	<b>MAX</b>	<b>UNITS</b>
$I_{CBO}$	$V_{CB}=60\text{V}$		10	nA
$I_{CBO}$	$V_{CB}=60\text{V}, T_A=125^\circ\text{C}$		10	$\mu\text{A}$
$I_{CEV}$	$V_{CE}=60\text{V}, V_{EB}=3.0\text{V}$		10	nA
$I_{EBO}$	$V_{EB}=3.0\text{V}$		10	nA
$BV_{CBO}$	$I_C=10\mu\text{A}$	75		V
$BV_{CEO}$	$I_C=10\text{mA}$	40		V
$BV_{EBO}$	$I_E=10\mu\text{A}$	6.0		V
$V_{CE(\text{SAT})}$	$I_C=150\text{mA}, I_B=15\text{mA}$		0.3	V
$V_{CE(\text{SAT})}$	$I_C=500\text{mA}, I_B=50\text{mA}$		1.0	V
$V_{BE(\text{SAT})}$	$I_C=150\text{mA}, I_B=15\text{mA}$	0.6	1.2	V
$V_{BE(\text{SAT})}$	$I_C=500\text{mA}, I_B=50\text{mA}$		2.0	V
$h_{FE}$	$V_{CE}=10\text{V}, I_C=0.1\text{mA}$	35		
$h_{FE}$	$V_{CE}=10\text{V}, I_C=1.0\text{mA}$	50		
$h_{FE}$	$V_{CE}=10\text{V}, I_C=10\text{mA}$	75		
$h_{FE}$	$V_{CE}=10\text{V}, I_C=150\text{mA}$	100	300	
$h_{FE}$	$V_{CE}=1.0\text{V}, I_C=150\text{mA}$	50		
$h_{FE}$	$V_{CE}=10\text{V}, I_C=500\text{mA}$	40		
$f_T$	$V_{CE}=20\text{V}, I_C=20\text{mA}, f=100\text{MHz}$	300		MHz

**CMST2222A**


**SURFACE MOUNT  
NPN SILICON TRANSISTOR**



**ELECTRICAL CHARACTERISTICS - Continued: ( $T_A=25^\circ\text{C}$  unless otherwise noted)**


SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
$C_{ob}$	$V_{CB}=10\text{V}$ , $I_E=0$ , $f=1.0\text{MHz}$		8.0	pF
$C_{ib}$	$V_{EB}=0.5\text{V}$ , $I_C=0$ , $f=1.0\text{MHz}$		25	pF
$h_{ie}$	$V_{CE}=10\text{V}$ , $I_C=1.0\text{mA}$ , $f=1.0\text{kHz}$	2.0	8.0	k $\Omega$
$h_{ie}$	$V_{CE}=10\text{V}$ , $I_C=10\text{mA}$ , $f=1.0\text{kHz}$	0.25	1.25	k $\Omega$
$h_{re}$	$V_{CE}=10\text{V}$ , $I_C=1.0\text{mA}$ , $f=1.0\text{kHz}$		8.0	$\times 10^{-4}$
$h_{re}$	$V_{CE}=10\text{V}$ , $I_C=10\text{mA}$ , $f=1.0\text{kHz}$		4.0	$\times 10^{-4}$
$h_{fe}$	$V_{CE}=10\text{V}$ , $I_C=1.0\text{mA}$ , $f=1.0\text{kHz}$	50	300	
$h_{fe}$	$V_{CE}=10\text{V}$ , $I_C=10\text{mA}$ , $f=1.0\text{kHz}$	75	375	
$h_{oe}$	$V_{CE}=10\text{V}$ , $I_C=1.0\text{mA}$ , $f=1.0\text{kHz}$	5.0	35	$\mu\text{s}$
$h_{oe}$	$V_{CE}=10\text{V}$ , $I_C=10\text{mA}$ , $f=1.0\text{kHz}$	25	200	$\mu\text{s}$
$r_b' C_C$	$V_{CB}=10\text{V}$ , $I_E=20\text{mA}$ , $f=31.8\text{MHz}$		150	ps
NF	$V_{CE}=10\text{V}$ , $I_C=100\text{mA}$ , $R_S=1.0\text{k}\Omega$ , $f=1.0\text{kHz}$		4.0	dB
$t_d$	$V_{CC}=30\text{V}$ , $V_{BE}=0.5\text{V}$ , $I_C=150\text{mA}$ , $I_{B1}=15\text{mA}$		10	ns
$t_r$	$V_{CC}=30\text{V}$ , $V_{BE}=0.5\text{V}$ , $I_C=150\text{mA}$ , $I_{B1}=15\text{mA}$		25	ns
$t_s$	$V_{CC}=30\text{V}$ , $I_C=150\text{mA}$ , $I_{B1}=I_{B2}=15\text{mA}$		225	ns
$t_f$	$V_{CC}=30\text{V}$ , $I_C=150\text{mA}$ , $I_{B1}=I_{B2}=15\text{mA}$		60	ns

**SOT-323 CASE - MECHANICAL OUTLINE**

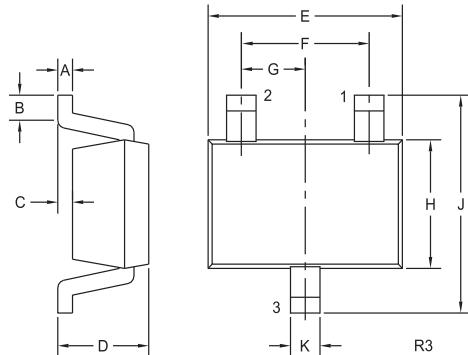

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.002	0.008	0.05	0.20
B	0.004	-	0.10	-
C	-	0.004	-	0.10
D	0.031	0.043	0.80	1.10
E	0.071	0.087	1.80	2.20
F	0.051	-	1.30	-
G	0.026	-	0.65	-
H	0.045	0.053	1.15	1.35
J	0.079	0.087	2.00	2.20
K	0.008	0.016	0.20	0.40

SOT-323 (REV: R3)



**LEAD CODE:**

- 1) Base
- 2) Emitter
- 3) Collector

**MARKING CODE: 1PC**

R4 (9-February 2010)

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Bipolar Transistors - BJT category:***

***Click to view products by Central Semiconductor manufacturer:***

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T\)](#)  
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)  
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#)  
[2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)  
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)  
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)