

SILICON HIGH VOLTAGE NPN TRANSISTORS



Central semiconductor corp.

www.centralsemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR MPSA42 and MPSA43 are silicon NPN transistors designed for high voltage applications.

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: (T _A =25°C) Collector-Base Voltage	SYMBOL V _{CBO}	<u>MPSA42</u> 300	<u>MPSA43</u> 200	UNITS V
Collector-Emitter Voltage	V _{CEO}	300	200	V
Emitter-Base Voltage	V _{EBO}	6.0		V
Continuous Collector Current	ΙC	500		mA
Power Dissipation	PD	625		mW
Power Dissipation (T _C =25°C)	PD	1.5		W
Operating and Storage Junction Temperature	T _J , T _{stg}	-65 to +150		°C
Thermal Resistance	Θ _{JA}	200		°C/W
Thermal Resistance	ΘJC	83	.3	°C/W


ELECTRICA	L CHARACTERISTICS: (T _A =25°C)	MP:	SA42	MPS	SA43	
SYMBOL	TEST CONDITIONS	MIN	MAX	MIN	MAX	UNITS
ICBO	V _{CB} =200V	-	100	-	-	nA
ICBO	V _{CB} =160V	-	-	-	100	nA
IEBO	V _{EB} =6.0V	-	100	-	-	nA
IEBO	V _{EB} =4.0V	-	-	-	100	nA
BVCBO	Ι _C =100μΑ	300	-	200	-	V
BVCEO	I _C =1.0mA	300	-	200	-	V
BVEBO	I _E =100μA	6.0	-	6.0	-	V
V _{CE(SAT)}	I _C =20mA, I _B =2.0mA	-	0.50	-	0.40	V
V _{BE(SAT)}	I _C =20mA, I _B =2.0mA	-	0.90	-	0.90	V
h _{FE}	V _{CE} =10V, I _C =1.0mA	25	-	25	-	
h _{FE}	V _{CE} =10V, I _C =10mA	40	-	40	-	
h _{FE}	V _{CE} =10V, I _C =30mA	40	-	50	200	
fŢ	V _{CE} =20V, I _C =10mA, f=100MHz	50	-	50	-	MHz
Cob	V _{CB} =20V, I _E =0, f=1.0MHz	-	3.0	-	4.0	pF

R2 (26-March 2015)





SILICON HIGH VOLTAGE NPN TRANSISTORS



BINENGIONO							
DIMENSIONS							
	INCHES		MILLIMETERS				
SYMBOL	MIN	MAX	MIN	MAX			
A (DIA)	0.175	0.205	4.45	5.21			
В	0.170	0.210	4.32	5.33			
С	0.500	-	12.70	-			
D	0.016	0.022	0.41	0.56			
Ш	0.100		2.54				
F	0.050		1.27				
G	0.125	0.165	3.18	4.19			
Н	0.080	0.105	2.03	2.67			
	0.015		0.38				
TO-92 (REV: R1)							

LEAD CODE:

1) Emitter 2) Base

TO-92 CASE - MECHANICAL OUTLINE

R1

3) Collector

MARKING: FULL PART NUMBER


www.centralsemi.com

R2 (26-March 2015)



MPSA42 MPSA43

SILICON HIGH VOLTAGE NPN TRANSISTORS

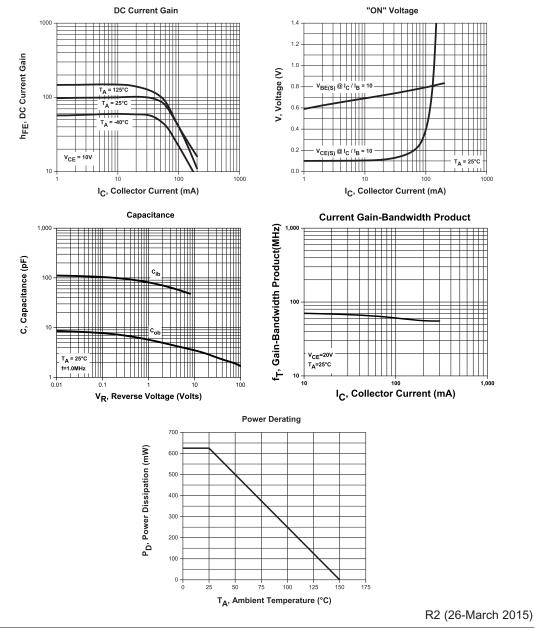

TYPICAL ELECTRICAL CHARACTERISTICS

www.centralsemi.com

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities

Special wafer diffusions

· Custom product packing

- PbSn plating options
- Package details
- Application notes
- Application and design sample kits

· Custom bar coding for shipments

Custom product and package development

REQUESTING PRODUCT PLATING

- 1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
- 2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp. 145 Adams Avenue Hauppauge, NY 11788 USA Main Tel: (631) 435-1110 Main Fax: (631) 435-1824 Support Team Fax: (631) 435-3388 www.centralsemi.com

Worldwide Field Representatives: www.centralsemi.com/wwreps

Worldwide Distributors: www.centralsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: <u>www.centralsemi.com/terms</u>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - BJT category:

Click to view products by Central Semiconductor manufacturer:

Other Similar products are found below :

619691C MCH4017-TL-H BC546/116 BC557/116 BSW67A NTE158 NTE187A NTE195A NTE2302 NTE2330 NTE63 C4460 2SA1419T-TD-H 2SA1721-O(TE85L,F) 2SA2126-E 2SB1204S-TL-E 2SD2150T100R SP000011176 FMMTA92QTA 2N2369ADCSM 2N5769 2SC2412KT146S 2SC5490A-TL-H 2SD1816S-TL-E 2SD1816T-TL-E CMXT2207 TR CPH6501-TL-E MCH4021-TL-E US6T6TR NJL0281DG 732314D CMXT3906 TR CPH3121-TL-E CPH6021-TL-H 873787E IMZ2AT108 UMX21NTR MCH6102-TL-E FP204-TL-E NJL0302DG 2N3583 2SA1434-TB-E 2SC3143-4-TB-E 2SD1621S-TD-E NTE103 30A02MH-TL-E NSV40301MZ4T1G NTE101 NTE13 NTE15