

2.54mm Box Header Right Angle (Elevated) Type

■ MATERIAL







Insulator : High Temperature Polyester
Contact Pin : Brass

■ SPECIFICATION



Current Rate : 1 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Operation Temperature : -40°C to +105°C



■ Detail Dimensions

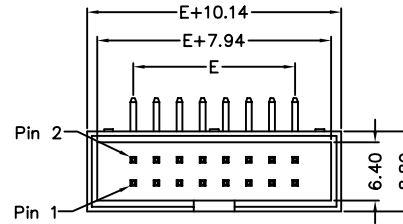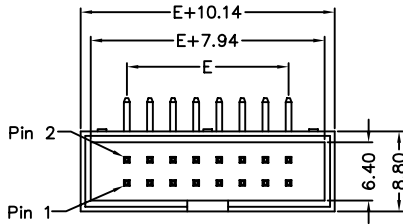

■ Recommended P.C.B Layout



■ Order Information

51x-x 0 - xx G B xx
1 2 3 4 5

Standard Parts
511-x0-xxGB00

- 1: Right Angle Type
- 7: Right Angle Elevated Type
- 2: 7: Green Product
- 9: Green Product High Temp
- 3: No. of contacts
- 4: G: Gold Flash
- S: Selective Gold Plating
- T: Tin Plating

5. Pinrex internal code

If you need other dimensions please fill out DIM A/B/C and contact our sales representatives.

DIM A	DIM B	DIM C

■ Number Of Contacts

Unit: mm

Poles	DIM E	Poles	DIM E	Poles	DIM E									
		18	20.32	44	53.34									
6	5.08	20	22.86	50	60.96									
8	7.62	24	27.94	60	73.66									
10	10.16	26	30.48	64	78.74									
12	12.70	30	35.56											
14	15.24	34	40.64											
16	17.78	40	48.26											