


# 7936 Series

## D-SUB Double Port Right Angle Type

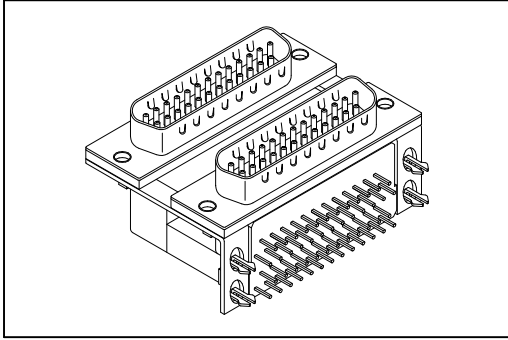

### Material:


Housing: Thermoplastic Polyester Glass Filled UL94V-0.  
 Contacts: Copper Alloy.  
 Shell: Metal.

### Electrical Characteristics:

Current Rating: 1 A.  
 Dielectric Withstanding Voltage: AC 1000V.  
 Insulator Resistance: 1000MΩ min.  
 Contact Resistance: 30mΩ max.  
 Operating Temperature: -55°C~+105°C.

### Features:

\* Mates with: 7907, 7908.

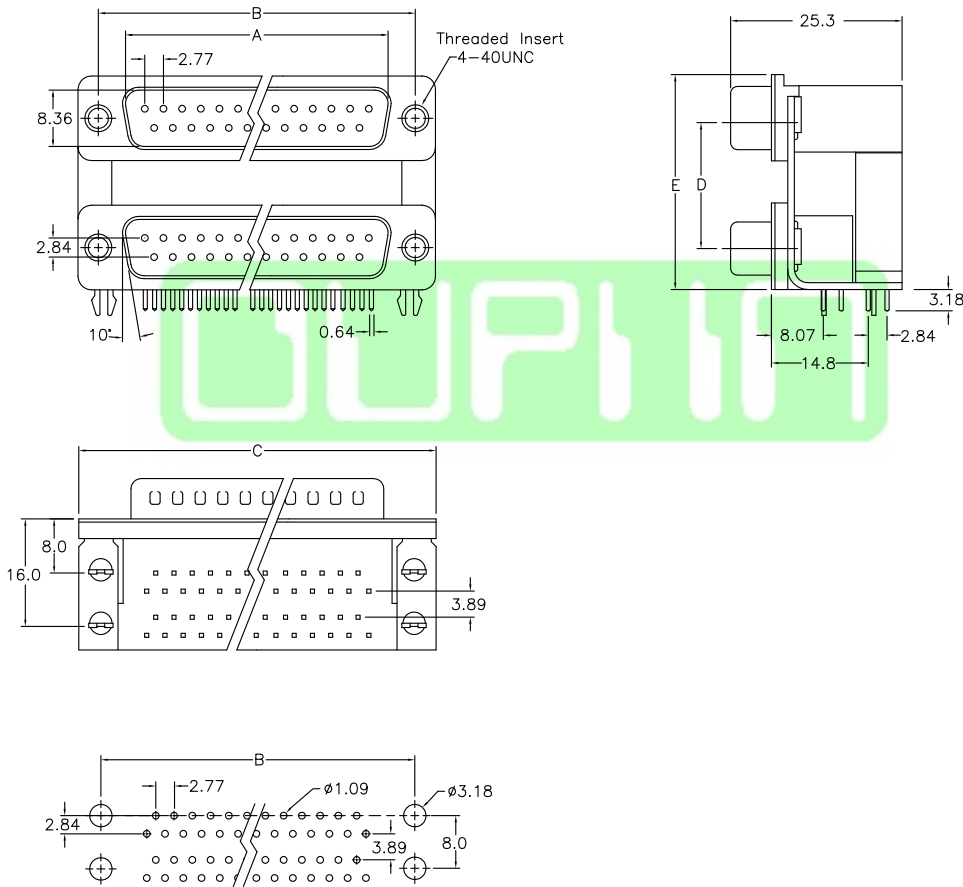

P.C. Board Layout

Position	Dimension									
	A(M)	A(F)	B	C	D			E		
9	16.92	16.32	24.99	30.81	15.88	19.05	22.86	28.43	31.60	35.41
15	25.25	24.66	33.32	39.14	15.88	19.05	22.86	28.43	31.60	35.41
25	38.96	38.38	47.04	53.04	15.88	19.05	22.86	28.43	31.60	35.41

## Ordering information

<u>7936-</u>	<u>25</u>	<u>M</u>	<u>M</u>	<u>B</u>	<u>1</u>	<u>A</u>
Series	Position	Top	Bottom	B: Grounding Fork	1: 15.88 See Dim: D	A: Tray
		M: Male	M: Male	H: Grounding Fork, Jack	2: 19.05 See Dim: D	Package
		F: Female	F: Female	Screw Separately	3: 22.86 See Dim: D	
				K: Grounding Strap		

\* Mix shell size available, Please consult factory.

Information including designs, specifications and components may be changed or updated without notice.