

L1499/1 TERMINAL PANEL FITTINGS


FIXING KIT 2
 COMPRISES : _____ Washer
 _____ Solder Tag
 _____ 2 Locknuts (No. 8-32 UNC)

B panel fittings

Comprises: _____ Phenolic resin moulding, SRBP insulating washer

Breakdown voltage: _____ 3 kVd.c.
 Insulation resistance: _____ $\geq 10^3$ megohms
 Temperature range: _____ -40 °C to +85 °C (ambient)

Fixing torque: _____ 1,41 Nm
 Colour: _____ Black

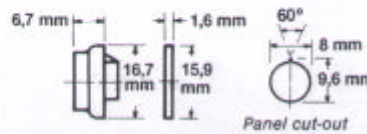


CA panel fittings

Comprises: _____ Phenolic resin moulding, 2 SRBP insulating washers

Breakdown voltage: _____ 3 kVd.c.
 Insulation resistance: _____ $\geq 10^3$ megohms

Temperature range: _____ -40 °C to +85 °C (ambient)

Fixing torque: _____ 1,41 Nm
 Colour: _____ Black

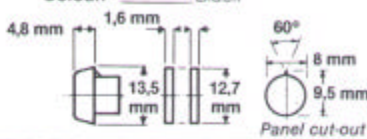


2B panel fittings

Comprises: _____ 2 phenolic resin mouldings

Breakdown voltage: _____ 7 kVd.c.
 Insulation resistance: _____ $\geq 10^4$ megohms
 Panel thickness: 0,9 mm to 1,6 mm

Temperature range: _____ -40 °C to +85 °C (ambient)

Fixing torque: _____ 1,41 Nm
 Colour: _____ Black




2L panel fittings

Comprises: _____ 2 polyethylene-polypropylene co-polymer mouldings

Breakdown voltage: _____ 8 kVd.c.
 Insulation resistance: _____ $\geq 10^4$ megohms
 Panel thickness: 0,9 mm to 4,8 mm

Temperature range: _____ -40 °C to +85 °C (ambient)

Fixing torque: _____ 1,41 Nm
 Colour: _____ Black

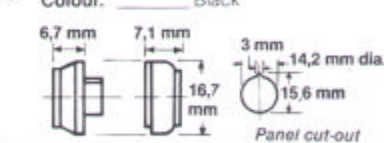


31A panel fittings

Comprises: _____ 2 polyethylene-polypropylene co-polymer mouldings

Breakdown voltage: _____ 8 kVd.c.
 Insulation resistance: _____ $\geq 10^4$ megohms
 Panel thickness: 0,9 mm to 3,2 mm

Temperature range: _____ -40 °C to +100 °C (ambient)

Fixing torque: _____ 1,41 Nm
 Colour: _____ Black

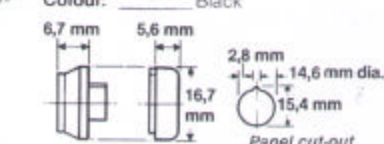

Dialight BLP reserve the right to change without prior notice the information contained within this leaflet

Dialight BLP Ltd., Exning Road, Newmarket, Suffolk, CB8 0AX, England
 Tel: +44 (0)1638 665161 Fax: +44 (0)1638 660718 email: sales@blpcomp.com http://www.blpcomp.com

