LAST UPDATED : August 22, 2007

Belling Lee

# L1O55A STANDARD GLASS FUSE LINK

**These size 0 (32mm x 6.3mm) standard glass fuse links are for protection of telecommunications and light electrical equipment. They have a minimum life of 1,000 hours continuous rated current at 25°C. They blow within 10 seconds a 2 x In (+20% to 0%). The de-rating for operation at elevated temperatures is: 1.75% per 10°C up to 100°C.**

**BREAKING CAPACITY** **10 x In**

**VOLTAGE RATING:** **(see table below)**

**MARKING:** **Rated value on cap**

**ORDERING REFERENCE: L1055A/CURRENT RATING IN AMPERES**

**Current ratings:**

| Rating | Rated voltage | Rating | Rated voltage |
|---|---|---|---|
| 60 mA | 1,000 d.c.<br>250 a.c. | 3 A | 32 d.c.<br>150 a.c. |
| 100 mA | 1,000 d.c.<br>250 a.c. | 5 A | 32 d.c.<br>60 a.c. |
| 150 mA | 1,000 d.c.<br>250 a.c. | 7.5 A | 32 d.c.<br>60 a.c. |
| 250 mA | 750 d.c.<br>250 a.c. | 10 A | 32 d.c.<br>60 a.c. |
| 500 mA | 300 d.c.<br>250 a.c. | 12 A | 32 d.c.<br>60 a.c. |
| 750 mA | 300 d.c.<br>250 a.c. | 15 A | 32 d.c.<br>32 a.c. |
| 1 A | 250 a.c.<br>250 a.c. | 20 A | 32 d.c.<br>32 a.c. |
| 1.5 A<br>2 A | 200 d.c.<br>250 a.c. | 25 A | 32 d.c.<br>32 a.c. |

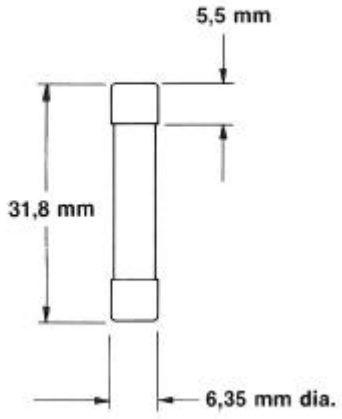


**NOTE – L1055A/100 and L1055A/150 have been discontiuned**

Dialight BLP reserve the right to change without prior notice the information contained within this leaflet

**Dialight BLP Ltd., Exning Road, Newmarket, Suffolk, CB8 0AX, England**
**Tel: +44 (0)1638 665161 Fax: +44 (0)1638 660718 email: sales@blpcomp.com http://www.blpcomp.com**

**A subsidiary of Dialight plc**