


**L2006A FUSEHOLDER**

- Miniature panel fuseholder
- Removable membrane in fuseholder head for test probe
- Fuse carrier that screw into the body to achieve a reliable contact
- Fuseholder bodies have a feature to prevent rotation within the panel
- Conforms to IEC 257 and BS415
- Accepts 20 x 5mm fuselinks

<b>CURRENT RATING:</b>	<b>6.3A</b>
<b>BREAKDOWN VOLTAGE:</b>	<b>&gt;4Kv (sea level)</b>
<b>TEMPERATURE RANGE:</b>	<b>-55°C to +70°C (ambient)</b>
<b>INSERTION RESISTANCE:</b>	<b>5 milliohms (average) 10 milliohms (maximum)</b>
<b>INSULATION RESISTANCE:</b>	<b>≥10 megohms</b>
<b>FIXING TORQUE (MAX):</b>	<b>0.68 Nm</b>
<b>FLAMMABILITY:</b>	<b>UL94VO</b>
<b>TERMINATIONS:</b>	<b>Solder</b>
<b>MATERIALS:</b>	<b>Moulding, phenolic Contacts, brass, silver-plated</b>
<b>APPROVALS</b>	<b>UL</b>

**ORDERING REFERENCE: L2006A**

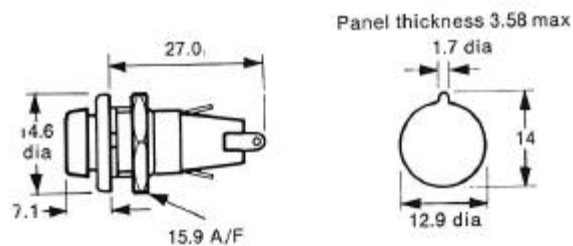

BLP reserve the right to change without prior notice the information contained within this leaflet

BLP Components Ltd., Exning Road, Newmarket, Suffolk, CB8 0AX, England  
Tel: +44 (0)1638 665161 Fax: +44 (0)1638 660718 email: sales@blpcomp.com <http://www.blpcomp.com>