



L2145 FILTERED CORD SET



This filter has been especially designed to protect equipment from mains interference where it is impractical for a filter to be fitted integrally.


The filter is fitted with an IEC 320 (CEE 22) appliance inlet and has a flexible cable which is terminated with a straight IEC (CEE 22) appliance coupler.

It is available in 6A rating and meets the requirements of British, European, Canadian and American approval authorities.

A further advantage is that this filter can provide additional protection to equipment where the integral filtration is found to be insufficient.

CURRENT RATING:	6 Amps
FREQUENCY:	0 – 400Hz
OPERATING VOLTAGE:	250V ac maximum
TEMPERATURE RANGE:	-25°C to 70°C
VOLTAGE DROP PER LINE:	≤1 V
EARTH LEAKAGE CURRENT:	≤2 X 0.25 mA (at 250V, 50Hz according to IEC348)
CAPACITORS:	0.015μF between lines (class X2) 2200pF each line to earth (class Y)
INDUCTANCE PER LINE:	0.7mH
LEAD LENGTH:	0.3 metre or 0.5 metre
CONNECTIONS:	IEC 320 (CEE22) appliance inlet IEC 320 (CEE22) appliance coupler

ORDERING REFERENCE: L2145/6 , L2145/6/0.5

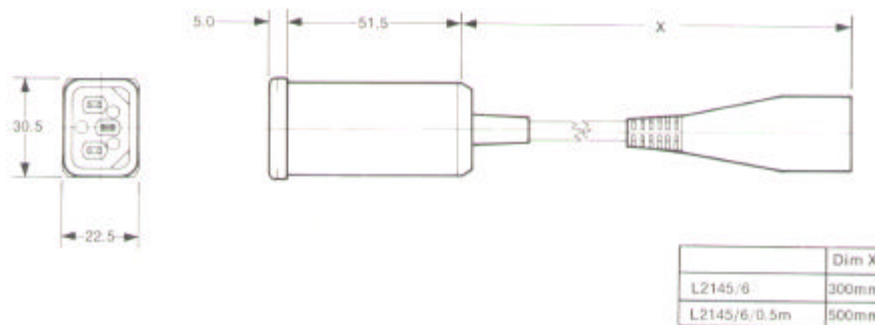

Dialight BLP reserve the right to change without prior notice the information contained within this leaflet

Dialight BLP Ltd., Exning Road, Newmarket, Suffolk, CB8 0AX, England
Tel: +44 (0)1638 665161 Fax: +44 (0)1638 660718 email: sales@blpcomp.com http://www.blpcomp.com