


Contact Form 1 Form A, 1 Form C
 Contact Rating 10 A, 30 VDC or 220 VAC
 Coil Voltage Available in 3, 5, 6, 9, 12, 24 VDC
 Operate Time $\leq 15\text{ms}$
 Release Time $\leq 10\text{ms}$
 Ambient Temperature -40 to +80C

2 Form A, 2 Form C
 5A, 30 VDC or 220 VAC


COIL DATA

Nominal Voltage (VDC)	Coil Resistance (OHMS)	Operate Voltage (VDC)	Release Voltage (VDC)
3	18		
5	50		
6	72	$\leq 75\%$ of Nominal Voltage	$\geq 10\%$ of Nominal
9	180		
12	285		
24	1150		

(SPDT)

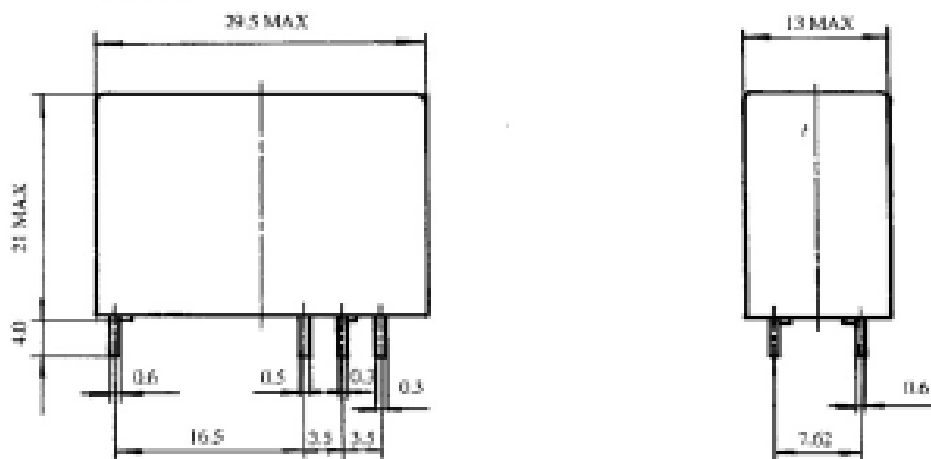

MOUNTING HOLES (BOTTOM VIEW)

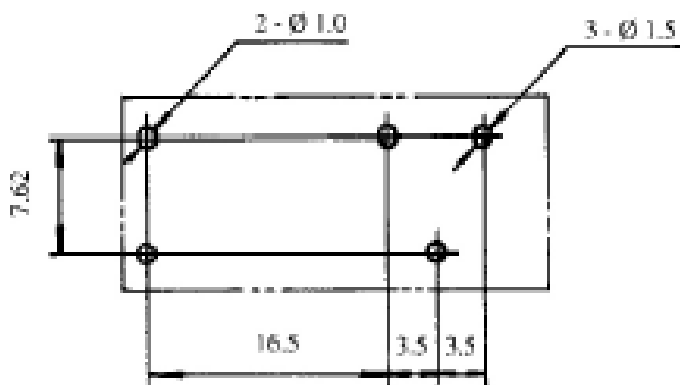

TERMINAL ARRANGEMENT (BOTTOM VIEW)

