

Ordering Information:

C2521HF-XP - **
1 2

1.Part No.

2.Color:

(blank):Black

WH:White

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max



Insulation Resistance: 500MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0 (Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	5.65	8P	17.50	20.65
3P	5.00	8.15	9P	20.00	23.15
4P	7.50	10.65	10P	22.50	25.65
5P	10.00	13.15	11P	25.00	28.15
6P	12.50	15.65	12P	27.50	30.65
7P	15.00	18.15			

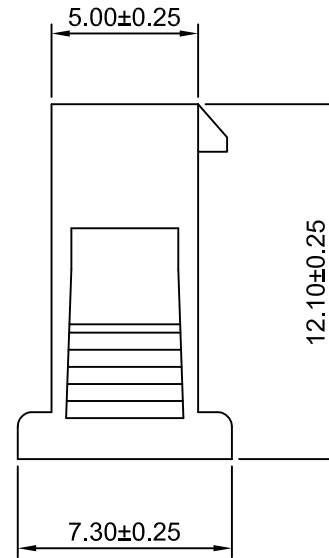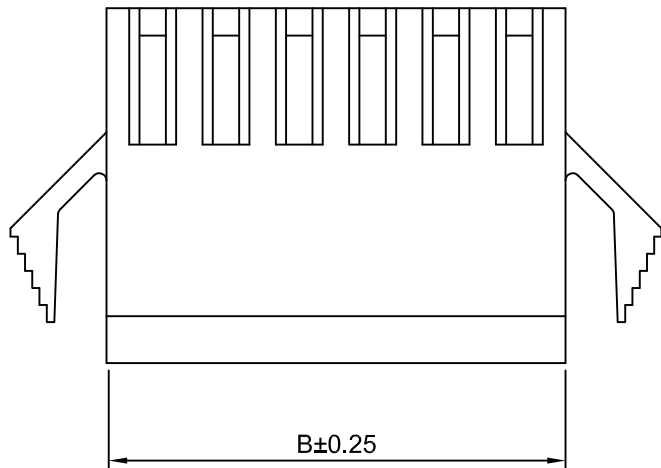

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit: mm
Scale: 4:1
Sheet: 1 of 1

Title :

2.50mm PITCH

Draw By:

Dlankul Wan

Approved :

Jack Yin

SINNGLE ROW HOUSING

General Tolerance

REV	DESCRIPTION	DATE	PROJECT
A1	CHANGE THE SIZE	2018.11.23	x.xx±0.25
A0	NEW RELEASE	2013.12.11	x.xx±0.20
			x.xxx±0.15

DRAW NO : C2521HF-XP

REV A1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Changjiang](#) manufacturer:

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [0009485154](#) [009176003701906](#) [0050291907](#) [00-9021-0611-00-339](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67016-026LF](#) [67095-007LF](#) [68631-112](#) [68645-018](#) [68648-049](#) [699319-000](#)
[70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [754199-000](#) [760-3052](#) [787-8014-00](#)
[FCN-367T-T012/H](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-41-018-10-001000](#)