



SOT-323 Plastic-Encapsulate Transistors

MMST5551 TRANSISTOR (NPN)


FEATURES

- Complementary to MMST5401
- Small Surface Mount Package
- Ideal for Medium Power Amplification and Switching

MARKING:K4N

MAXIMUM RATINGS (T_a=25°C unless otherwise noted)

| Symbol | Parameter | Value | Unit |
|------------------|---|----------|------|
| V _{CB0} | Collector-Base Voltage | 180 | V |
| V _{CE0} | Collector-Emitter Voltage | 160 | V |
| V _{EBO} | Emitter-Base Voltage | 6 | V |
| I _C | Collector Current | 600 | mA |
| P _C | Collector Power Dissipation | 200 | mW |
| R _{θJA} | Thermal Resistance From Junction To Ambient | 625 | °C/W |
| T _j | Junction Temperature | 150 | °C |
| T _{stg} | Storage Temperature | -55~+150 | °C |








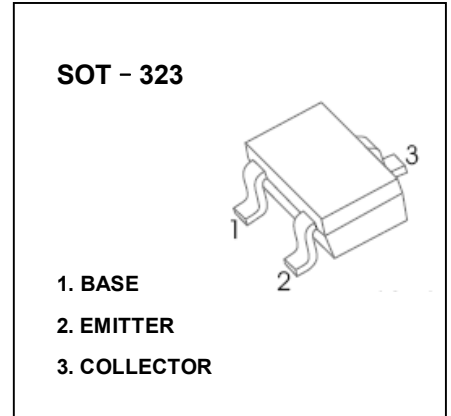


ELECTRICAL CHARACTERISTICS (T_a=25°C unless otherwise specified)



| Parameter | Symbol | Test conditions | Min | Typ | Max | Unit |
|--------------------------------------|------------------------|--|-----|-----|------|------|
| Collector-base breakdown voltage | V _{(BR)CBO} | I _C =100μA, I _E =0 | 180 | | | V |
| Collector-emitter breakdown voltage | V _{(BR)CEO} * | I _C =1mA, I _B =0 | 160 | | | V |
| Emitter-base breakdown voltage | V _{(BR)EBO} | I _E =10μA, I _C =0 | 6 | | | V |
| Collector cut-off current | I _{CBO} | V _{CB} =120V, I _E =0 | | | 50 | nA |
| Emitter cut-off current | I _{EBO} | V _{EB} =4V, I _C =0 | | | 50 | nA |
| DC current gain | h _{FE} | V _{CE} =5V, I _C =1mA | 80 | | | |
| | | V _{CE} =5V, I _C =10mA | 80 | | 300 | |
| | | V _{CE} =5V, I _C =50mA | 30 | | | |
| Collector-emitter saturation voltage | V _{CE(sat)} | I _C =50mA, I _B =5mA | | | 0.2 | V |
| | | I _C =10mA, I _B =1mA | | | 0.15 | V |
| Base-emitter saturation voltage | V _{BE(sat)} | I _C =50mA, I _B =5mA | | | 1 | V |
| | | I _C =10mA, I _B =1mA | | | 1 | V |
| Transition frequency | f _T | V _{CE} =10V, I _C =10mA, f=100MHz | 100 | | 300 | MHz |
| Collector output capacitance | C _{ob} | V _{CB} =10V, I _E =0, f=1MHz | | | 6 | pF |

*Pulse test: pulse width ≤300μs, duty cycles ≤ 2.0%.

Typical Characteristics

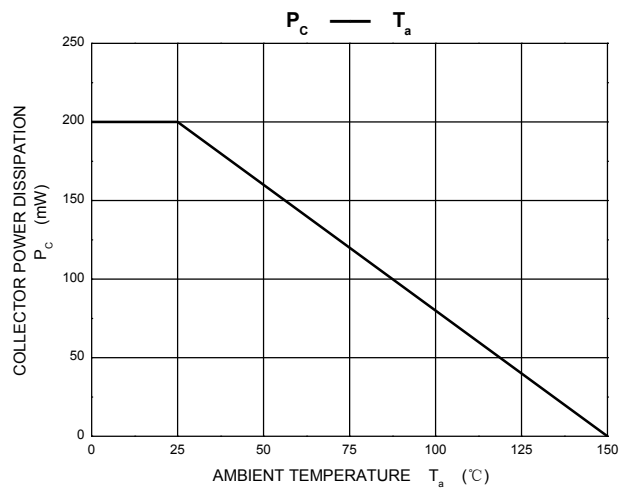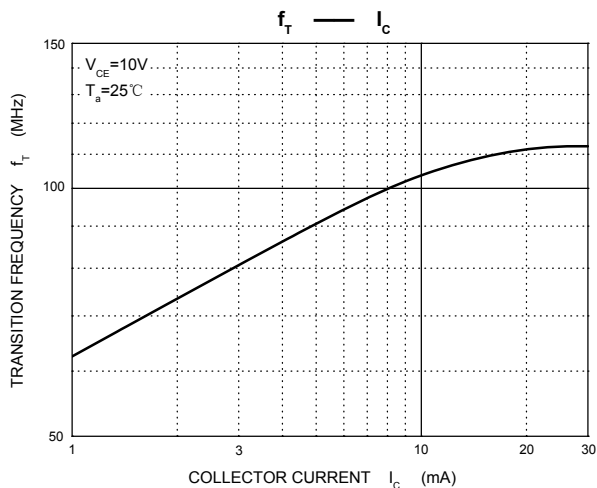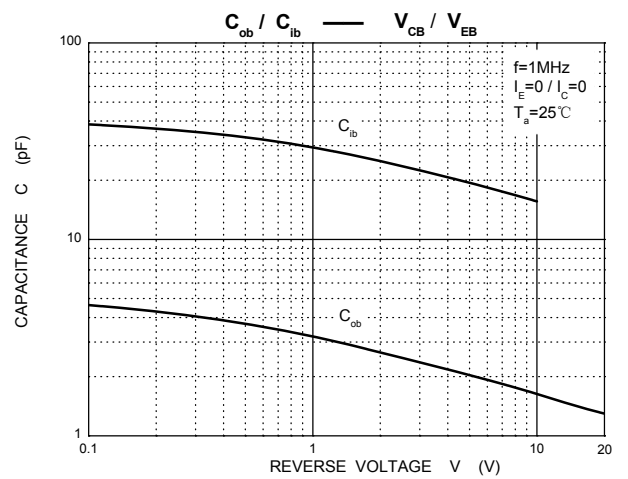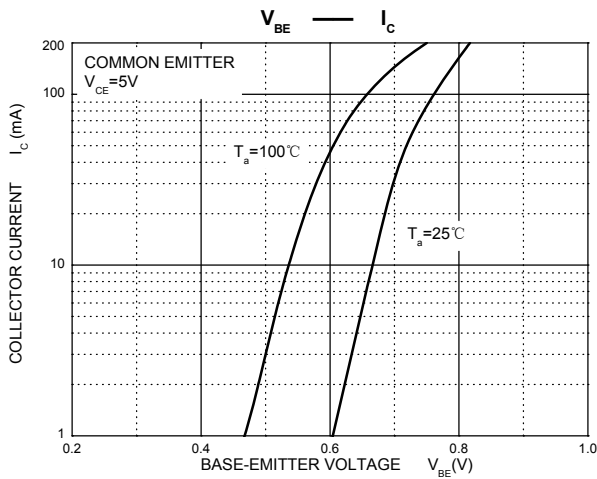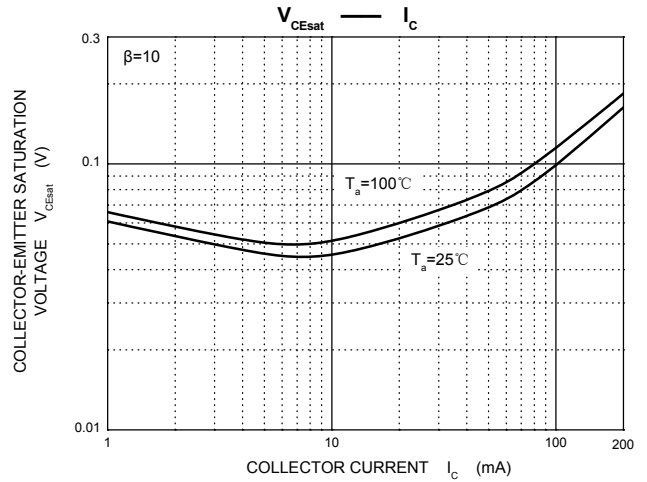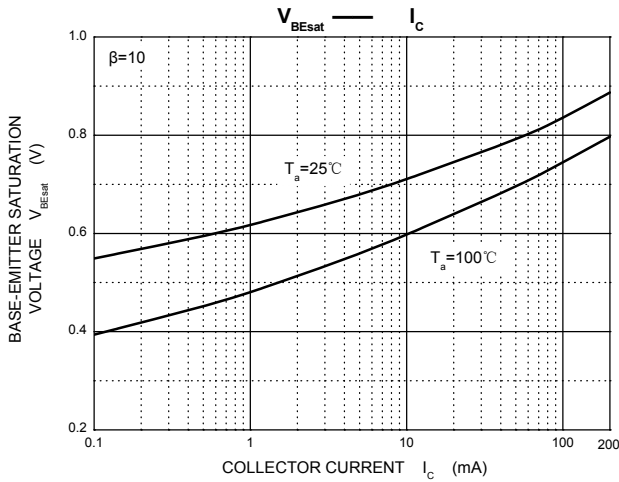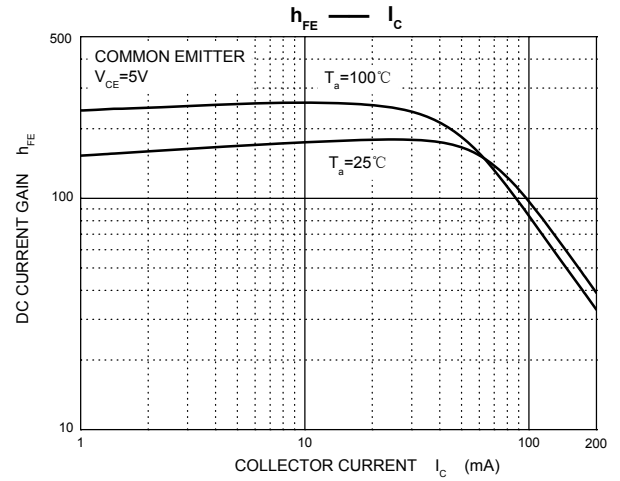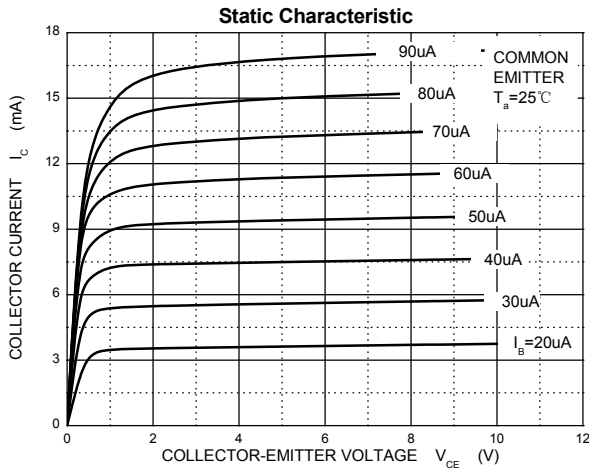


SOT-323 Package Outline Dimensions

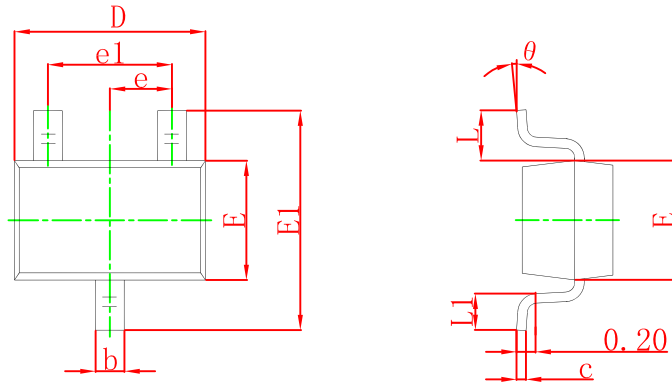

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min | Max | Min | Max |
| A | 0.900 | 1.100 | 0.035 | 0.043 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 0.900 | 1.000 | 0.035 | 0.039 |
| b | 0.200 | 0.400 | 0.008 | 0.016 |
| c | 0.080 | 0.150 | 0.003 | 0.006 |
| D | 2.000 | 2.200 | 0.079 | 0.087 |
| E | 1.150 | 1.350 | 0.045 | 0.053 |
| E1 | 2.150 | 2.450 | 0.085 | 0.096 |
| e | 0.650 TYP | | 0.026 TYP | |
| e1 | 1.200 | 1.400 | 0.047 | 0.055 |
| L | 0.525 REF | | 0.021 REF | |
| L1 | 0.260 | 0.460 | 0.010 | 0.018 |
| theta | 0° | 8° | 0° | 8° |

SOT-323 Suggested Pad Layout



Note:


1. Controlling dimension: in millimeters.
2. General tolerance: ± 0.05 mm.
3. The pad layout is for reference purposes only.

NOTICE

JCET reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JCET does not assume any liability arising out of the application or use of any product described herein.

SOT-323 Tape and Reel


SOT-323 Embossed Carrier Tape

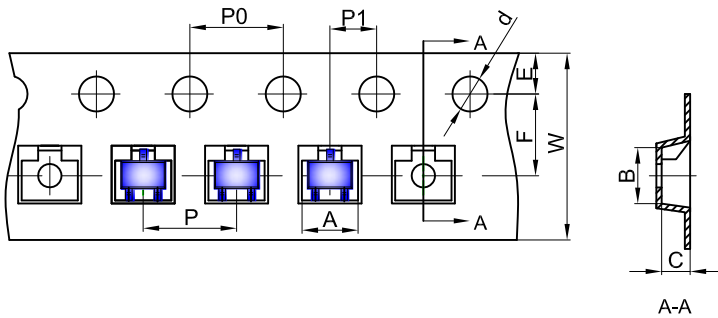


Packaging Description:
 SOT-323 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

| Dimensions are in millimeter | | | | | | | | | | |
|------------------------------|------|------|------|-------|------|------|------|------|------|------|
| Pkg type | A | B | C | d | E | F | P0 | P | P1 | W |
| SOT-323 | 2.25 | 2.55 | 1.19 | Ø1.55 | 1.75 | 3.50 | 4.00 | 4.00 | 2.00 | 8.00 |

SOT-323 Tape Leader and Trailer

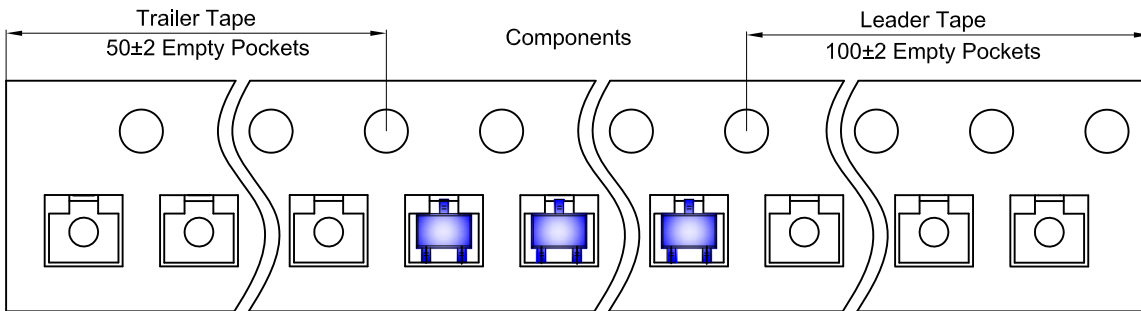

SOT-323 Reel

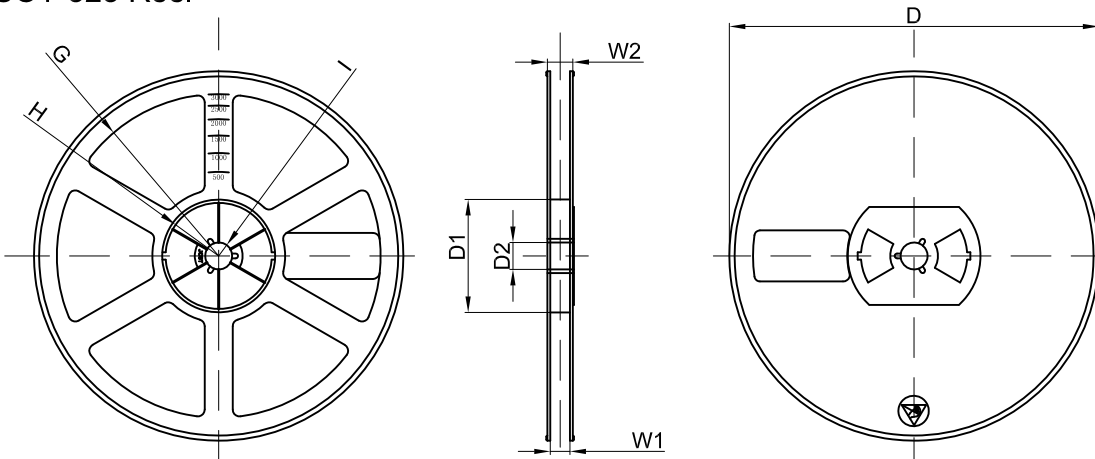

| Dimensions are in millimeter | | | | | | | | |
|------------------------------|---------|-------|-------|--------|--------|-------|------|-------|
| Reel Option | D | D1 | D2 | G | H | I | W1 | W2 |
| 7" Dia | Ø178.00 | 54.40 | 13.00 | R78.00 | R25.60 | R6.50 | 9.50 | 12.30 |

| REEL | Reel Size | Box | Box Size(mm) | Carton | Carton Size(mm) | G.W.(kg) |
|----------|-----------|------------|--------------|-------------|-----------------|----------|
| 3000 pcs | 7 inch | 45,000 pcs | 203×203×195 | 180,000 pcs | 438×438×220 | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [Changjiang manufacturer](#):

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NJVMJD148T4G](#) [NTE123AP-10](#) [NTE153MCP](#) [NTE16](#)
[NTE195A](#) [NTE92](#) [C4460](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC2712S-GR,LF](#) [2SC5488A-TL-H](#)
[2SD2150T100R](#) [SP000011176](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC2412KT146S](#) [2SD1816S-TL-E](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#)
[MJE340](#) [US6T6TR](#) [NJL0281DG](#) [732314D](#) [CPH3121-TL-E](#) [CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#) [UMX21NTR](#) [MCH6102-TL-E](#)
[NJL0302DG](#) [2N3583](#) [30A02MH-TL-E](#) [NSV40301MZ4T1G](#) [NTE13](#) [NTE26](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [STX83003-AP](#)