

深圳市长江微电科技有限公司
SZ CJIANG TECHNOLOGY CO.,LTD

Specification For Approval

| | |
|---------------|---|
| Customer | |
| Product Name | common mode line filte |
| Customer P/N: | |
| Cjiang P/N: | FLCM0904-XXX Series FLCM0905C-XXX Series |

[New Released, Revised]

SPEC No.:

| | | |
|-----------------------------------|--|--|
| REMARK: | | |
| | | |
| Customer Approval Feedback | | |
| | | |

• 深圳市长江微电科技有限公司

SZ CJIANG TECHNOLOGY CO.,LTD

ADD: 11F, International Science and Technology Building, Fuhong Road, Futian District, Shenzhen

Factory ADD: No. shanyang RD CJIANG Industrial Park HUI' AN Section HUI' AN City Jiangsu Province

TEL:0755-82529562 FAX:0755-83977004

[HTTP://WWW.CJIANG.COM.CN](http://WWW.CJIANG.COM.CN)

E-mail: BOND@cjiang.com.cn : ann@cjiang.com.cn

深圳市长江微电科技有限公司
SZ CJIANG TECHNOLOGY CO.,LTD

| Version change history | | | | | |
|------------------------|-----------|-------------|----------|---------|-------|
| Rev | Date | Description | APPROVED | CHECKED | DRAWN |
| 1.0 | 2022/8/9 | 文件制定 | Bond | 罗雪婷 | 董京天 |
| 2.0 | 2024/1/24 | 更改规范 | Bond | Charles | |


Caution :

All products listed in this specification are developed, designed and intended for use in general electronics equipment. The products are not designed or Warranted to meet the requirements of the applications listed below, whose performance and/or quality require especially high reliability, or whose failure, malfunction or trouble might directly cause damage to society, person, or property. Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below. Please contact us for more details if you intend to use our products in the following applications.

1. Aircraft equipment.
2. Aerospace equipment.
3. Undersea equipment.
4. nuclear control equipment.
5. military equipment.
6. Power plant equipment.
7. Medical equipment.
8. Transportation equipment (automobiles, trains, ships,etc.)
9. Traffic signal equipment.
10. Disaster prevention / crime prevention equipment.
11. Data-processing equipment.
12. Applications of similar complexity or with reliability requirements comparable to the applications listed in the above.

Common Mode Line Filte FLCM0904 Series

Product Identification:




FLCM 0904 - 101

(1) (2) (3)

- (1) Series
- (2) Dimensions(L*H*W)
- (3) Impedance(100=10uH, 101=100uH, 102=1000uH)

DIMENSIONS DRAWING:

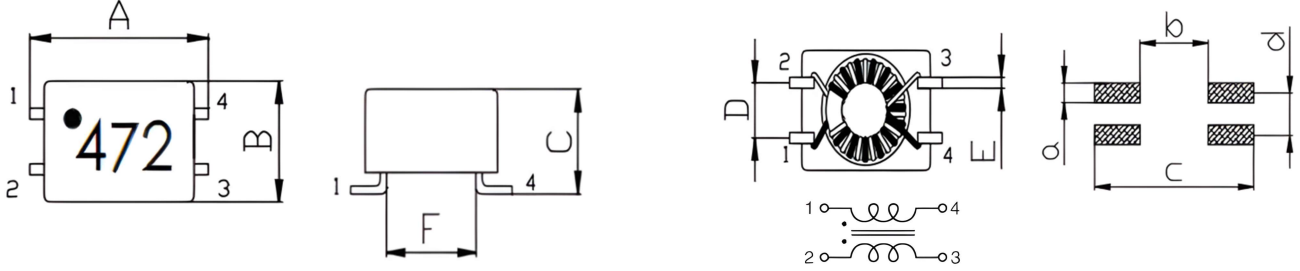

| TYPE | Shape and Dimensions | | | | | | | Recommended Pattern | | | |
|----------|----------------------|--------|--------|---------|--------|--------|--------|---------------------|--------|---------|---------|
| | A(mm) | B(mm) | C(mm) | D(mm) | E(mm) | F(mm) | G(mm) | a(mm) | b(mm) | c(mm) | d(mm) |
| FLCM0904 | 9.5Max | 5.6Max | 5.2Max | 2.54Typ | 0.5Typ | 5.5Typ | 6.0Typ | 1.0Typ | 4.5Typ | 10.5Typ | 2.54Typ |

Common Mode Line Filte FLCM0904 Series

ELECTRICAL CHARACTERISTIC:









| Part Number | Inductance +50%/-30% @100KHz/0.1V | Leakage Inductance L1-4(2-3short) @100KHz/0.1V | DCR (mΩ)Max | Current Rating(A) | Impedance (Ω)Min | Freq.range (MHz) | Rated Volt (Vdc)Max. |
|--------------|---|---|----------------|----------------------|---------------------|---------------------|-------------------------|
| FLCM0904-110 | 11uH | 0.08 uH Typ | 120 | 0.5 | 160 | 20-300 | 50V |
| FLCM0904-250 | 25uH | 0.15 uH Typ | 200 | 0.5 | 450 | 20-150 | 50V |
| FLCM0904-510 | 51uH | 0.20 uH Typ | 300 | 0.5 | 800 | 20-100 | 50V |
| FLCM0904-101 | 100uH | 0.25 uH Typ | 100 | 0.5 | 600 | 3-20 | 50V |
| FLCM0904-471 | 470uH | 0.28 uH Typ | 280 | 0.5 | 1200 | 2-15 | 50V |
| FLCM0904-102 | 1000uH | 0.28 uH Typ | 300 | 0.5 | 1800 | 1-10 | 50V |
| FLCM0904-222 | 2200uH | 0.29 uH Typ | 400 | 0.5 | 3000 | 0.8-5 | 50V |
| FLCM0904-472 | 4700uH | 0.30 uH Typ | 700 | 0.5 | 5000 | 0.5-3 | 50V |

- (1) .Rated Current: Temp. rise 40°C TYP
- (2) .Operating Temperature: -40 °C up to + 125°C

Common Mode Line Filte FLCM0904 Series

CHARACTERISTICS(REFERENCE)

— Common Mode
— Differential Mode

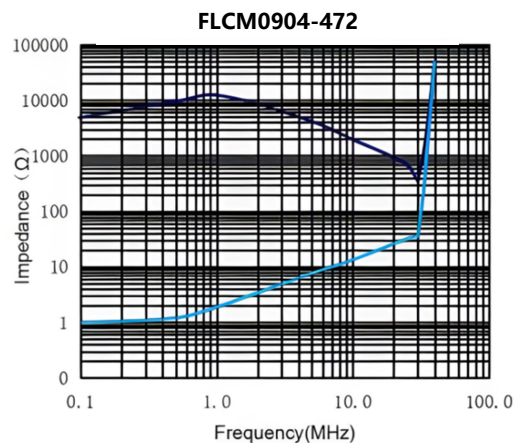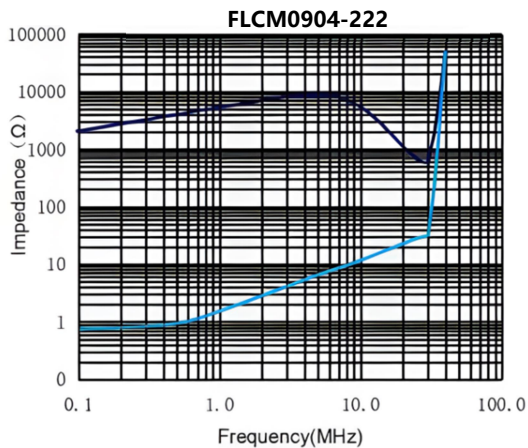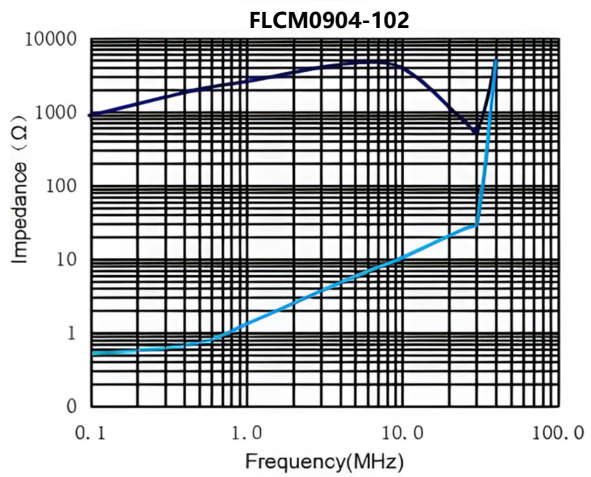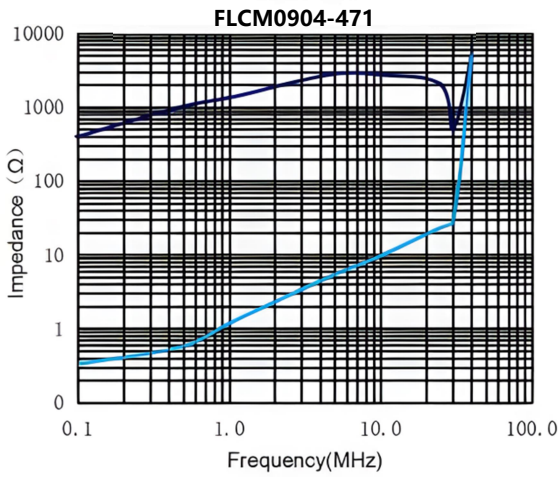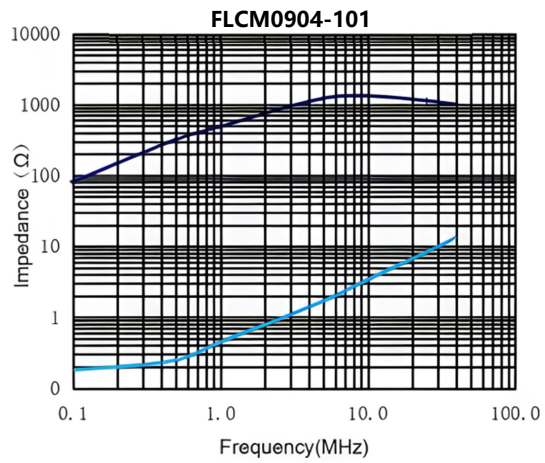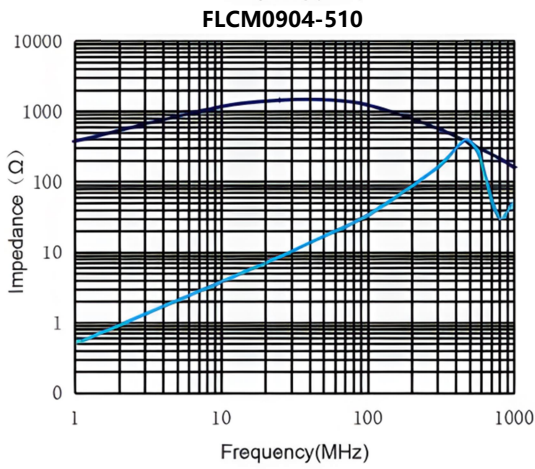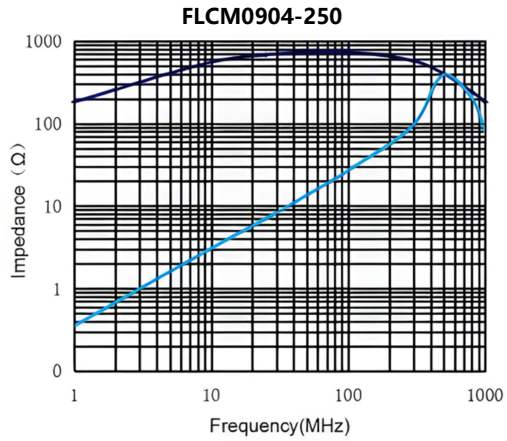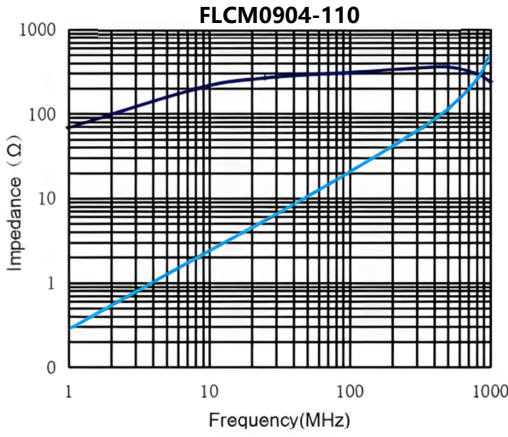

Common Mode Line Filte FLCM-0905C Series

Product Identification:

FLCM 0905 C - 100 Y
 (1) (2) (3) (4) (5)

(1)Series

(2)Dimensions(L*H*W)


(3)Type

(4)Inductance(100=uH, 101=100uH, 102=1000uH)

(5)Tolerance See Spec table



DIMENSIONS DRAWING:

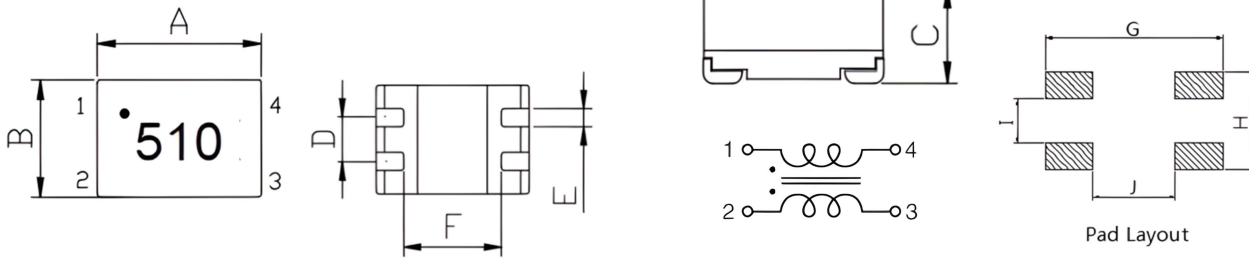

| Shape and Dimensions | | | | | | | Recommended Pattern | | | |
|----------------------|---------|---------|---------|----------|---------|--------|---------------------|--------|--------|--------|
| TYPE | A(mm) | B(mm) | C(mm) | D(mm) | E(mm) | F(mm) | G(mm) | H(mm) | I(mm) | J(mm) |
| FLCM0905C | 9.2±0.3 | 6.0±0.3 | 5.0±0.3 | 2.54±0.2 | 1.0±0.1 | 5.7Typ | 6.0Typ | 5.1Typ | 2.5Typ | 1.5Typ |

Common Mode Line Filte FLCM0905C Series

ELECTRICAL CHARACTERISTIC:

| Part Number | Inductance L1=L2 (uH) | Test Frequency | DCR N1,N2(Ω) | Rated Current (A)Max. | Impedance (Ω)Min | Freq. range(MHz) | Rated Volt. (Vdc)Max. | IR (Ω) Min. |
|----------------|--------------------------|-------------------|-----------------|-----------------------------|---------------------|---------------------|--------------------------|-------------|
| FLCM0905C-100Y | 10 +50%/-30% | 1KHz/0.1V | 0.08 Max. | 1.6 | 300 | 20-200 | 50 | 10M |
| FLCM0905C-250Y | 25 +50%/-30% | 1KHz/0.1V | 0.16 Max | 1.0 | 600 | 5-100 | 50 | 10M |
| FLCM0905C-400Y | 40 +50%/-30% | 1KHz/0.1V | 0.25 Max. | 0.9 | 800 | 5-100 | 50 | 10M |
| FLCM0905C-510Y | 51 +50%/-30% | 1KHz/0.1V | 0.32 Max. | 0.8 | 1000 | 5-50 | 50 | 10M |
| FLCM0905C-251Y | 250 ±50% | 100KHz/5mV | 0.13 Max. | 1.2 | 600 | 5-50 | 50 | 10M |
| FLCM0905C-471Y | 470 ±50% | 100KHz/5mV | 0.14 Max. | 1.1 | 800 | 1-50 | 50 | 10M |
| FLCM0905C-501Y | 500 ±50% | 100KHz/5mV | 0.15 Max. | 1.0 | 900 | 1-40 | 50 | 10M |
| FLCM0905C-102Y | 1000 ±50% | 100KHz/5mV | 0.31 Max. | 0.8 | 1000 | 1-30 | 50 | 10M |
| FLCM0905C-202Y | 2000 ±50% | 100KHz/5mV | 0.42 Max | 0.6 | 3000 | 1-10 | 50 | 10M |
| FLCM0905C-472Y | 4700 ±50% | 100KHz/5mV | 0.90 Max. | 0.4 | 3000 | 0.5-5 | 50 | 10M |
| FLCM0905C-652Y | 6500 ±50% | 100KHz/5mV | 1.05 Max. | 0.3 | 4000 | 0.3-2 | 50 | 10M |







(1) .Rated Current: Temp. rise 40°C TYP

(2) .Operating Temperature: -40 °C up to + 125°C

Common Mode Line Filte FLCM - 0905C Series

CHARACTERISTICS(REFERENCE)






— Common Mode

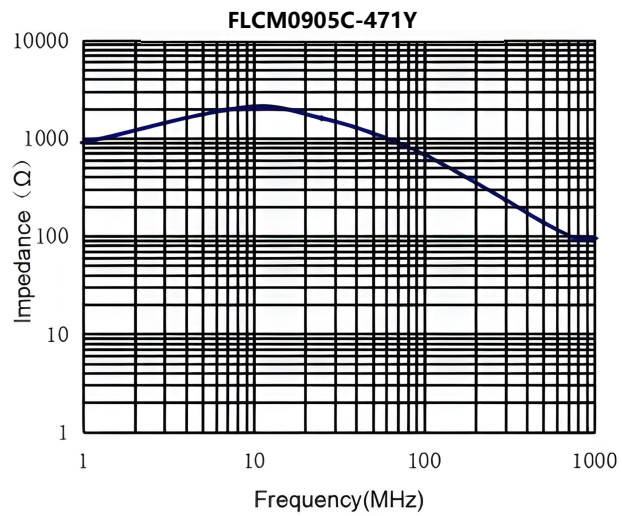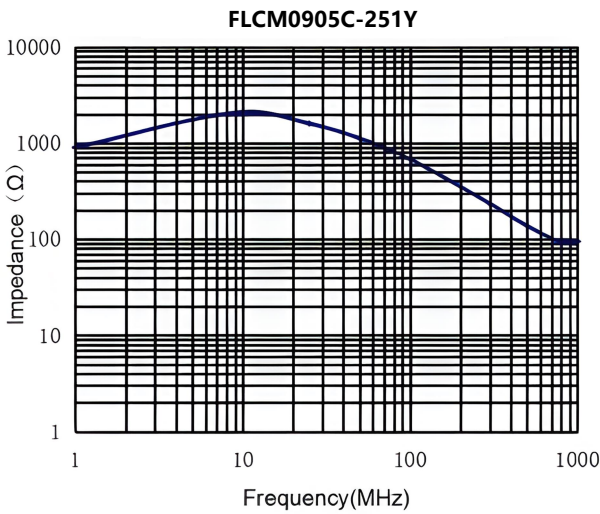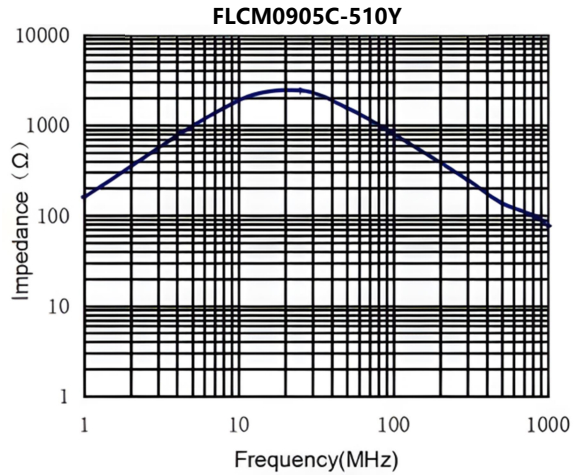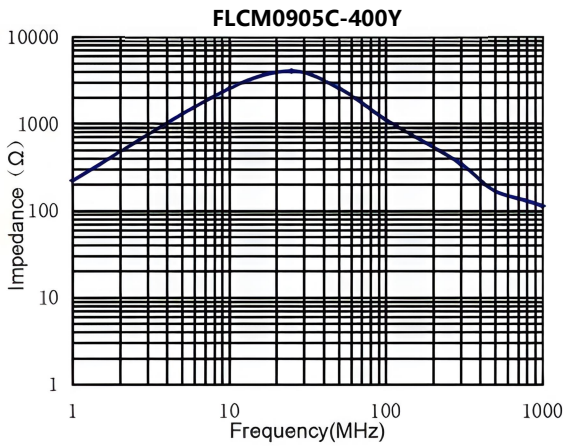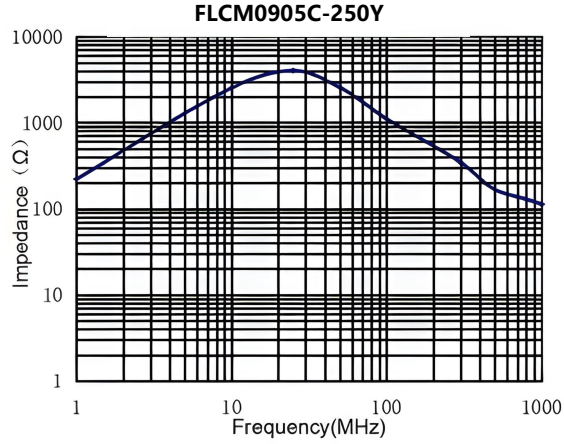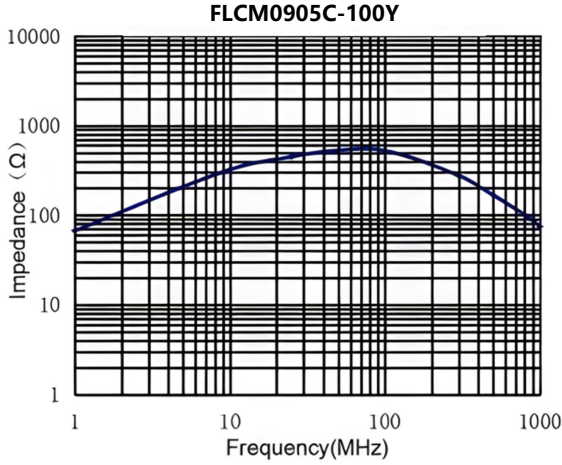

Common Mode Line Filte FLCM - 0905C Series

CHARACTERISTICS(REFERENCE)

Common Mode

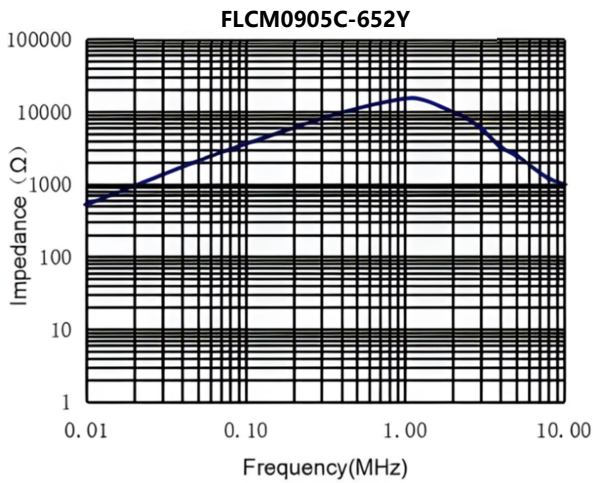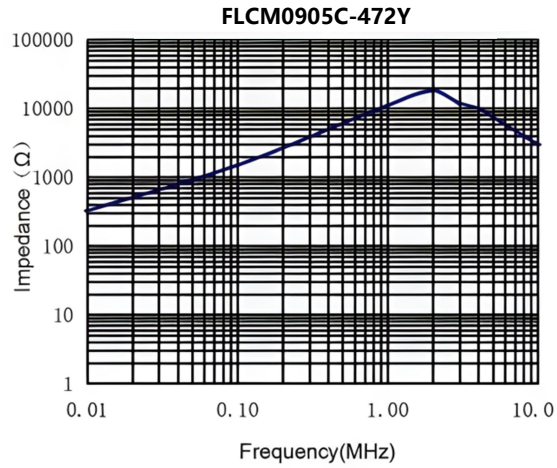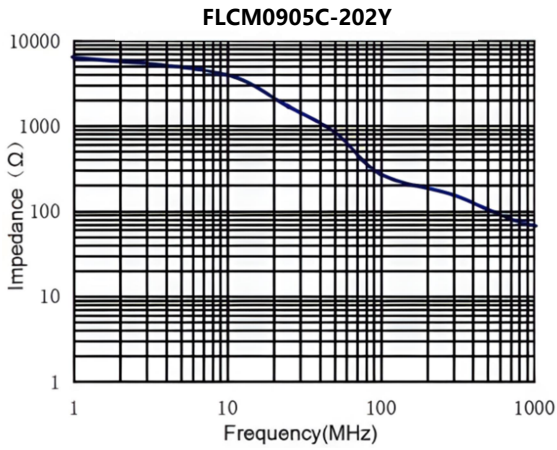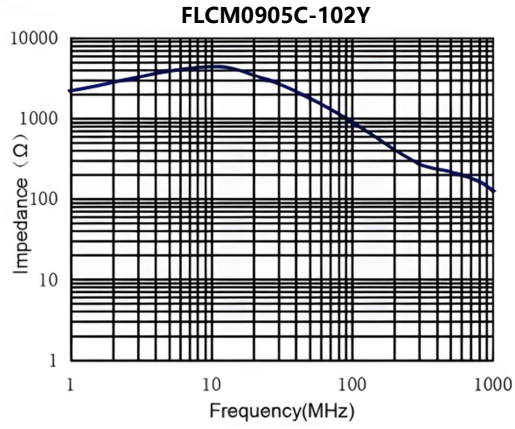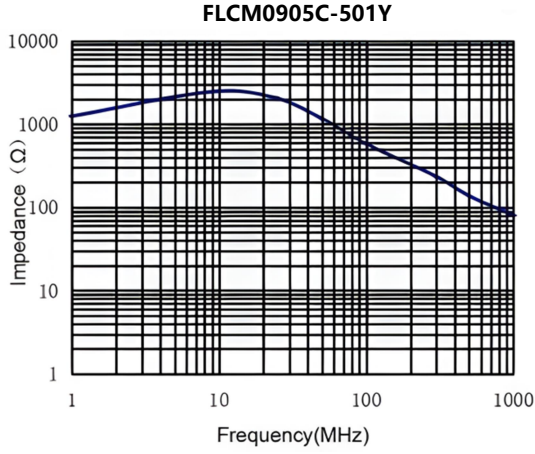

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Common Mode Chokes / Filters](#) *category:*

Click to view products by [Changjiang Microelectronics](#) *manufacturer:*

Other Similar products are found below :

[PE-64683](#) [RD5122-6-9M6](#) [RD6137-6-7M5](#) [RD8147-16-3M0](#) [ST6118T-R](#) [FE3X025-10-7NL](#) [RD7147-25-0M7](#) [TCM0806G-350-2P-T](#)
[TCM0806G-650-2P-T](#) [IND-0110](#) [UAL21VR0802000](#) [UALSC023000000](#) [UALSC1020JH000](#) [UALSU10VD20010](#) [UALSU9VD070100](#) [36-00037](#) [UALW21HS072450](#) [UALSU9H0208000](#) [UAL24VK06450CH](#) [PLT10HH501100PNB](#) [PLT10HH401100PNB](#) [PLT10HH1026R0PNB](#)
[36-00029-01](#) [PE-67531](#) [TLH10UB](#) [113 0R5](#) [2752045447](#) [7351V](#) [CMF16-153131](#) [RD7147-6-6M0](#) [T8116NLT](#) [FE2X10-4-2NL](#) [36-00029-07](#)
[T8003NLT](#) [CTX01-13663](#) [CTX66-19521-R](#) [RC212-0.5-10M](#) [RC112-0.4-15M](#) [RC212-0.6-6M8](#) [RC212-0.4-15M](#) [RC112-0.3-30M](#)
[WTCF2012Z0M751PB](#) [PH9408.814NLT](#) [PAC6006.364NLT](#) [PAC6006.444NLT](#) [PAC6006.204NLT](#) [PH9407.204NLT](#) [PAC6006.264NLT](#)
[PH9408.105NLT](#) [PH9408.494NLT](#) [PAC6006.104NLT](#)