



SOT-723 Plastic-Encapsulate Transistors

MMBT3904M TRANSISTOR (NPN)


FEATURE

- Complementary to MMBT3906M
- Small Package

MARKING: 1N

MAXIMUM RATINGS ($T_a=25^\circ\text{C}$ unless otherwise noted)









Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	60	V
V_{CEO}	Collector-Emitter Voltage	40	V
V_{EBO}	Emitter-Base Voltage	6	V
I_c	Collector Current -Continuous	0.2	A
P_c	Power Dissipation	0.1	W
R_{OJA}	Thermal Resistance from Junction to Ambient	1250	$^\circ\text{C/W}$
T_j, T_{stg}	Operation Junction and Storage Temperature Range	-55~+150	$^\circ\text{C}$

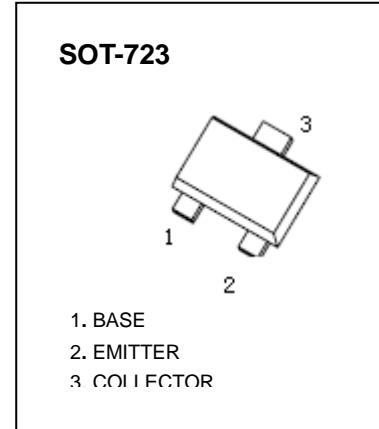




ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(\text{BR})\text{CBO}}$	$I_c=10\mu\text{A}, I_E=0$	60			V
Collector-emitter breakdown voltage	$V_{(\text{BR})\text{CEO}}$	$I_c=1\text{mA}, I_B=0$	40			V
Emitter-base breakdown voltage	$V_{(\text{BR})\text{EBO}}$	$I_E=10\mu\text{A}, I_c=0$	6			V
Collector cut-off current	I_{CEX}	$V_{\text{CE}}=30\text{V}, V_{\text{EB}(\text{off})}=3\text{V}$			50	nA
Emitter cut-off current	I_{EBO}	$V_{\text{EB}}=5\text{V}, I_c=0$			100	nA
DC current gain	$h_{FE(1)}$	$V_{\text{CE}}=1\text{V}, I_c=0.1\text{mA}$	40			
	$h_{FE(2)}$	$V_{\text{CE}}=1\text{V}, I_c=1\text{mA}$	70			
	$h_{FE(3)}$	$V_{\text{CE}}=1\text{V}, I_c=10\text{mA}$	100		300	
	$h_{FE(4)}$	$V_{\text{CE}}=1\text{V}, I_c=50\text{mA}$	60			
Collector-emitter saturation voltage	$V_{\text{CE}(\text{sat})1}$	$I_c=10\text{mA}, I_B=1\text{mA}$			0.2	V
	$V_{\text{CE}(\text{sat})2}$	$I_c=50\text{mA}, I_B=5\text{mA}$			0.3	V
Base-emitter saturation voltage	$V_{\text{BE}(\text{sat})1}$	$I_c=10\text{mA}, I_B=1\text{mA}$	0.65		0.85	V
	$V_{\text{BE}(\text{sat})2}$	$I_c=50\text{mA}, I_B=5\text{mA}$			0.95	V
Transition frequency	f_T	$V_{\text{CE}}=20\text{V}, I_c=10\text{mA}, f=100\text{MHz}$	300			MHz
Output capacitance	C_{ob}	$V_{\text{CB}}=5\text{V}, I_E=0, f=1\text{MHz}$			4	pF
Input capacitance	C_{ib}	$V_{\text{EB}}=0.5\text{V}, I_c=0, f=1\text{MHz}$			8	pF
Noise figure	NF	$V_{\text{CE}}=5\text{V}, I_c=0.1\text{mA}, f=1\text{MHz}, R_S=1\text{k}\Omega$			5	dB
Delay time	t_d	$V_{\text{CC}}=3\text{V}, V_{\text{BE}(\text{off})}=-0.5\text{V}, I_c=10\text{mA}, I_B=1\text{mA}$			35	ns
Rise time	t_r				35	ns
Storage time	t_s	$V_{\text{CC}}=3\text{V}, I_c=10\text{mA}$			200	ns
Fall time	t_f	$I_B1=I_B2=1\text{mA}$			50	ns

Typical Characteristics

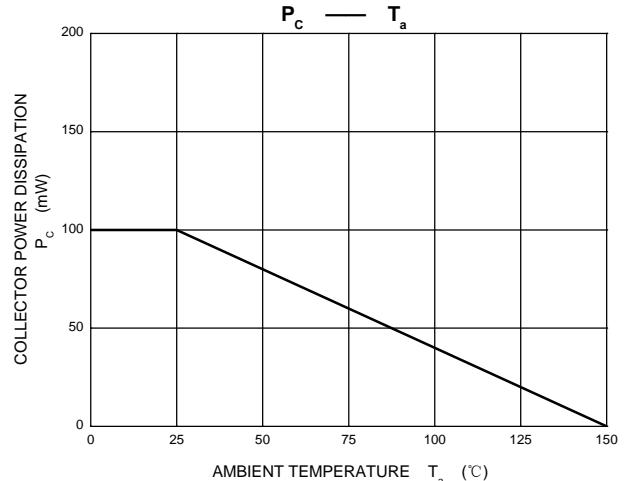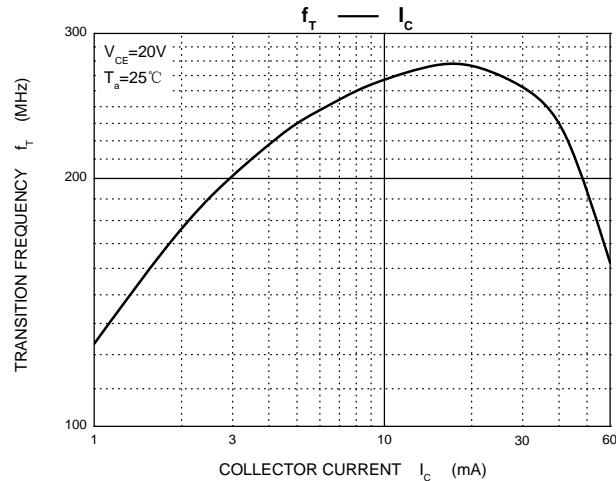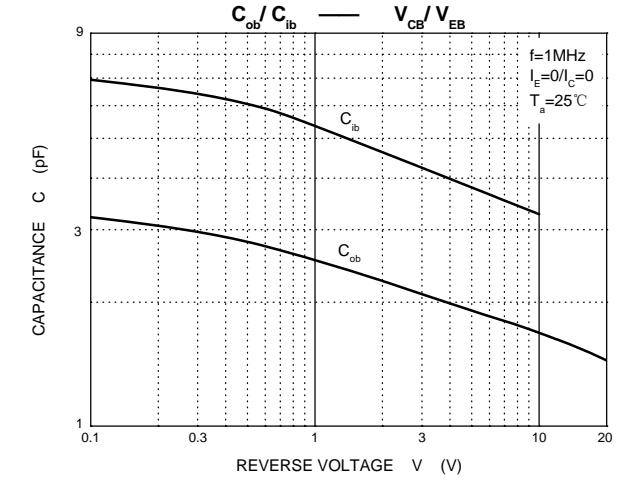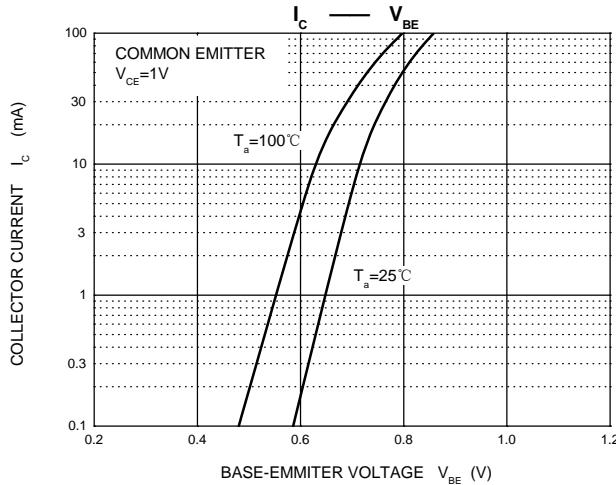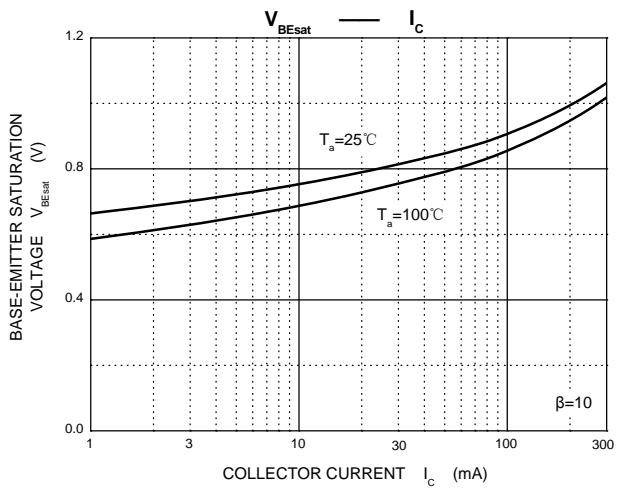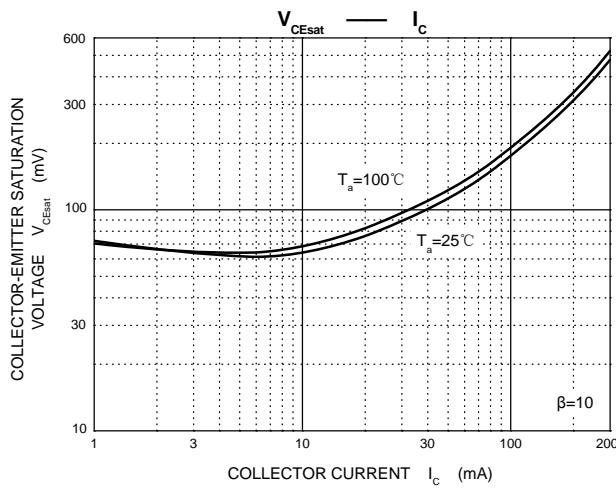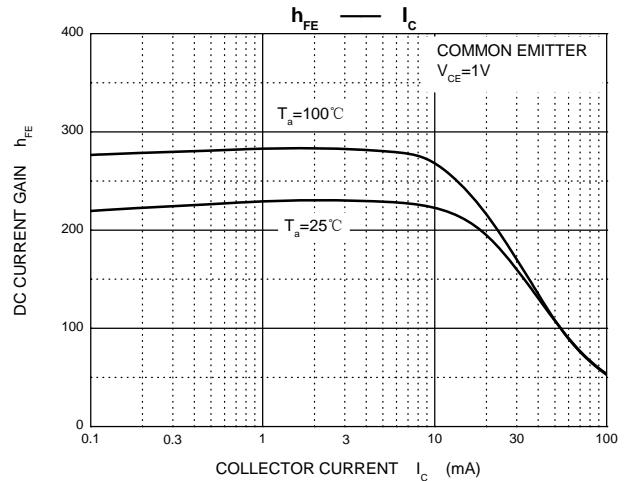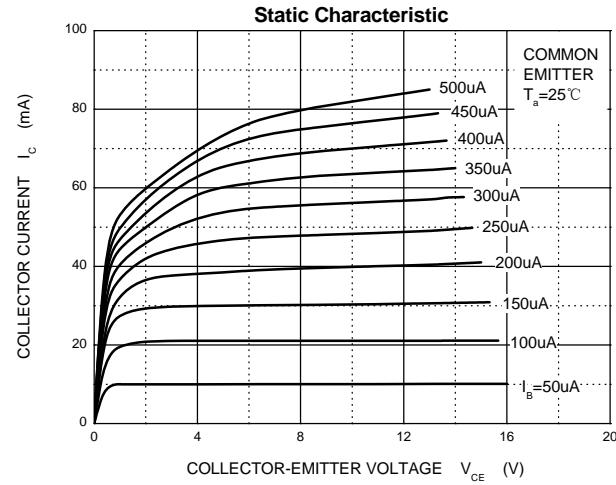


SOT-723 Package Outline Dimensions

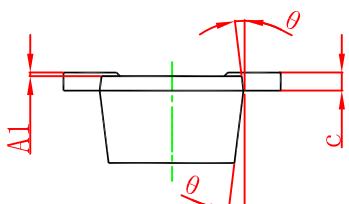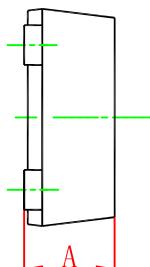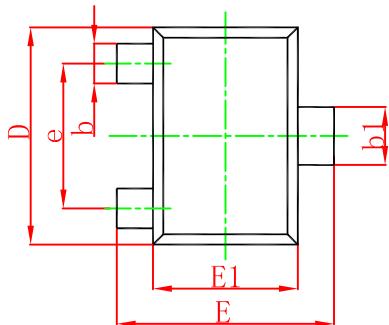

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.430	0.500	0.017	0.020
A1	0.000	0.050	0.000	0.002
b	0.170	0.270	0.007	0.011
b1	0.270	0.370	0.011	0.015
c	0.080	0.150	0.003	0.006
D	1.150	1.250	0.045	0.049
E	1.150	1.250	0.045	0.049
E1	0.750	0.850	0.030	0.033
e	0.800TYP.		0.031TYP.	
θ	7° REF.		7° REF.	

SOT-723 Suggested Pad Layout

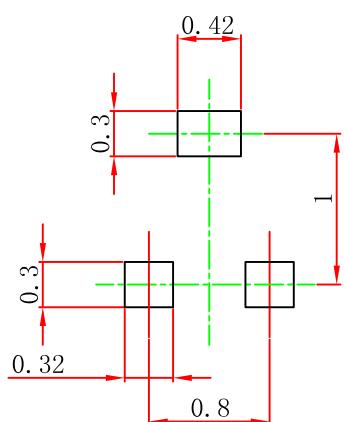

Note:


1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.

NOTICE

JSCJ reserves the right to make modifications,enhancements,improvements,corrections or other changes without further notice to any product herein. JSCJ does not assume any liability arising out of the application or use of any product described herein.

SOT-723 Tape and Reel

SOT-723 Embossed Carrier Tape

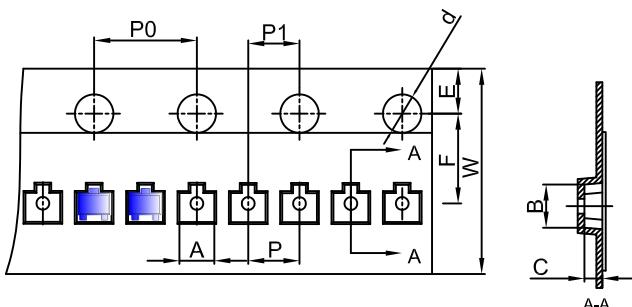


Packaging Description:

SOT-723 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 8,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).


Dimensions are in millimeter

Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-723	1.33	1.45	0.61	Ø1.50	1.75	3.50	4.00	2.00	2.00	8.00

SOT-723 Tape Leader and Trailer

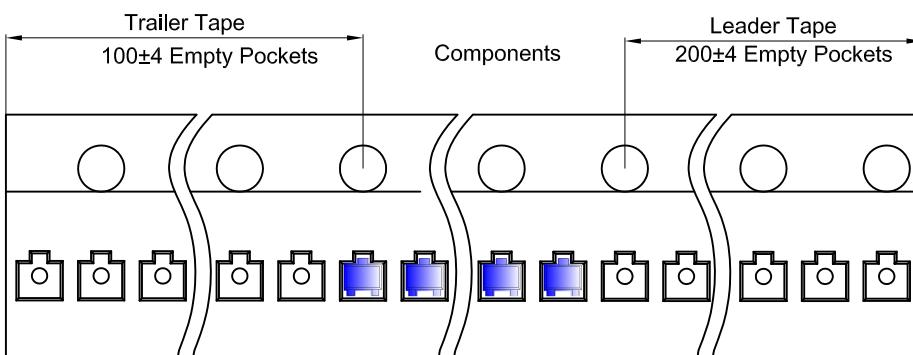

SOT-723 Reel

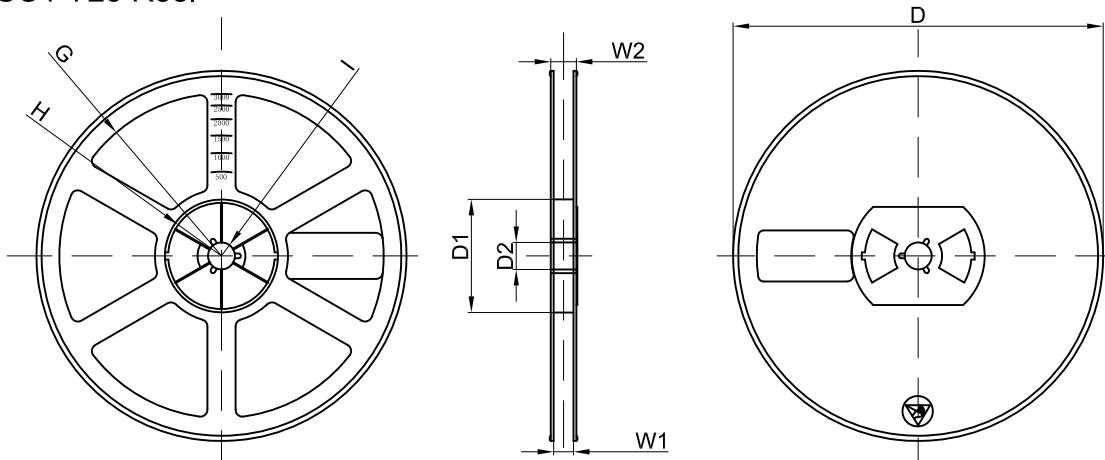

Dimensions are in millimeter

Reel Option	D	D1	D2	G	H	I	W1	W2
7" Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
8000 pcs	7 inch	120,000 pcs	203×203×195	480,000 pcs	438×438×220	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - BJT category:

Click to view products by Changjing Electronics Technology manufacturer:

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NJVMJD148T4G](#) [NTE123AP-10](#) [NTE153MCP](#) [NTE16](#)
[NTE195A](#) [NTE92](#) [C4460](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC2712S-GR,LF](#) [2SC5488A-TL-H](#)
[2SD2150T100R](#) [SP000011176](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC2412KT146S](#) [2SD1816S-TL-E](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#)
[MJE340](#) [US6T6TR](#) [NJK0281DG](#) [732314D](#) [CPH3121-TL-E](#) [CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#) [UMX21NTR](#) [MCH6102-TL-E](#)
[NJK0302DG](#) [2N3583](#) [30A02MH-TL-E](#) [TN6717A](#) [NSV40301MZ4T1G](#) [NTE13](#) [NTE26](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#)