



JBSL Plastic-Encapsulate Bridge Rectifier

RJBSL510 Fast Recovery Bridge Rectifier

Features


- $I_{F(AV)}$ 5A
- V_{RRM} 1000V
- High surge current capability
- Glass passivated chip

Applications

- General purpose 1 phase Bridge rectifier applications

Marking

- RJBSL510

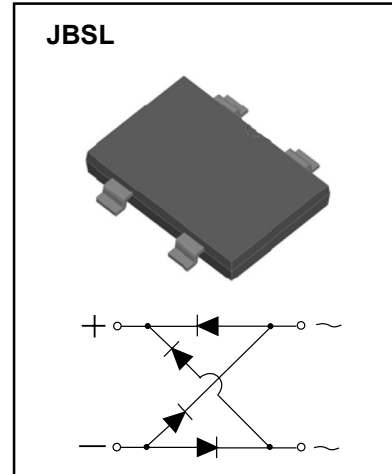

Limiting Values (Absolute Maximum Rating)

Item	Symbol	Unit	Conditions	RJBSL510
Repetitive Peak Reverse Voltage	V_{RRM}	V		1000
Maximum RMS Voltage	V_{RMS}	V		700
Maximum DC Blocking Voltage	V_{DC}	V		1000
Average Rectified Output Current	I_o	A	60Hz sine wave, R-load, $T_c=80^\circ\text{C}$ On alumina substrate	5.0
Surge(Non-repetitive)Forward Current	I_{FSM}	A	8.3ms sine wave, 1 cycle, $T_j=25^\circ\text{C}$	150
Current Squared Time	I^2t	A^2S	$1\text{ms} \leq t < 8.3\text{ms}$ $T_j=25^\circ\text{C}$, Rating of per diode	93
Operation Junction and Storage Temperature Range	T_j, T_{stg}	$^\circ\text{C}$		-55 ~+150

Electrical Characteristics ($T=25^\circ\text{C}$ Unless otherwise specified)

Item	Symbol	Unit	Test Condition	RJBSL510
Maximum Peak Forward Voltage	V_{FM}	V	$I_{FM}=5.0\text{A}$, Pulse measurement, Rating of per diode	1.3
Maximum Peak Reverse Current	I_{RRM}	μA	$V_{RM}=V_{RRM}$, $T_a=25^\circ\text{C}$	5
			$V_{RM}=V_{RRM}$, $T_a=100^\circ\text{C}$	100
Maximum reverse recovery time	t_{rr}	ns	$I_F=0.5\text{A}, I_R=1.0\text{A}, I_{rr}=0.25\text{A}$	500
Typical junction capacitance	C_J	pF	Measured at 1MHz and applied reverse voltage of 4.0V D.C.	50
Typical thermal resistance	$R_{\theta J-A}$	$^\circ\text{C/W}$	Between junction and ambient, On alumina substrate	60
	$R_{\theta J-C}$		Between junction and case	15
	$R_{\theta J-L}$		Between junction and lead	10

Typical Characteristics

FIG.1: FORWARD CURRENT DERATING CURVE

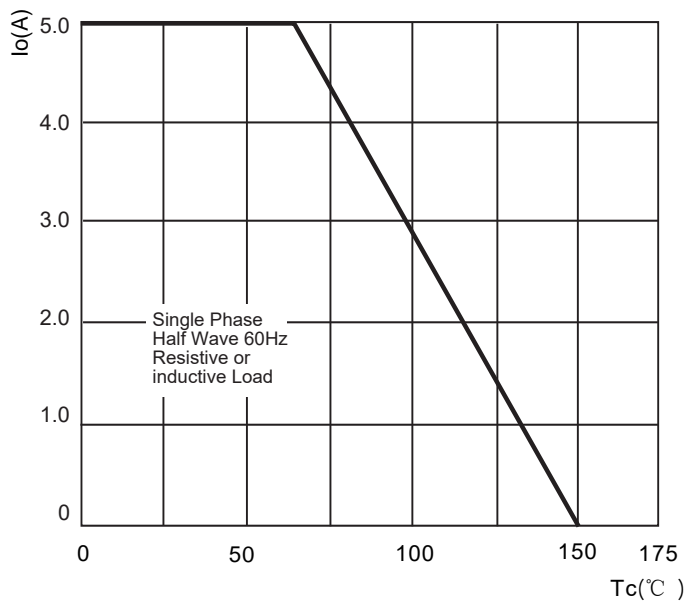


FIG.2: MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

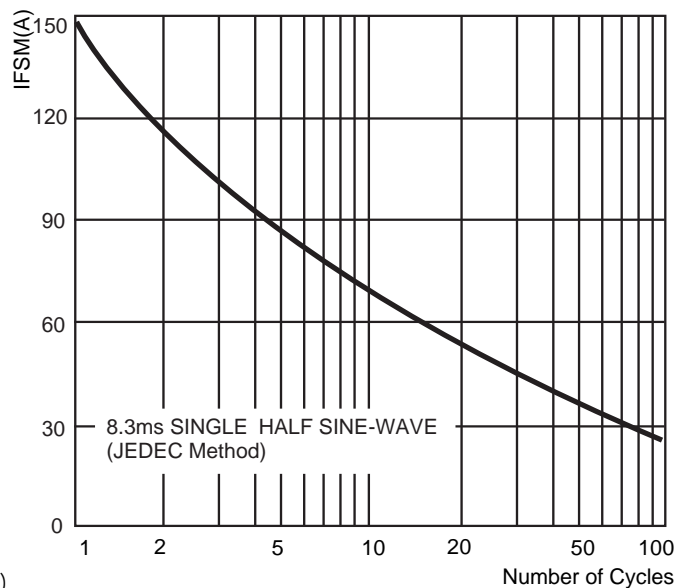


FIG.3: TYPICAL FORWARD CHARACTERISTICS



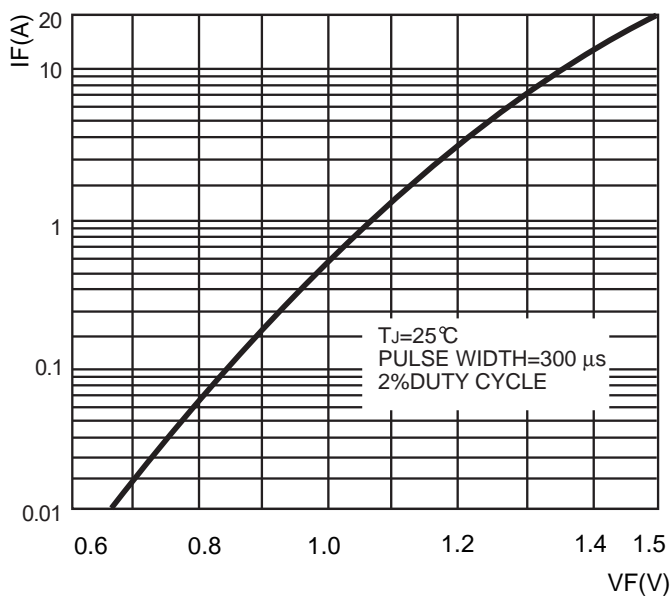


FIG.4: TYPICAL REVERSE CHARACTERISTICS

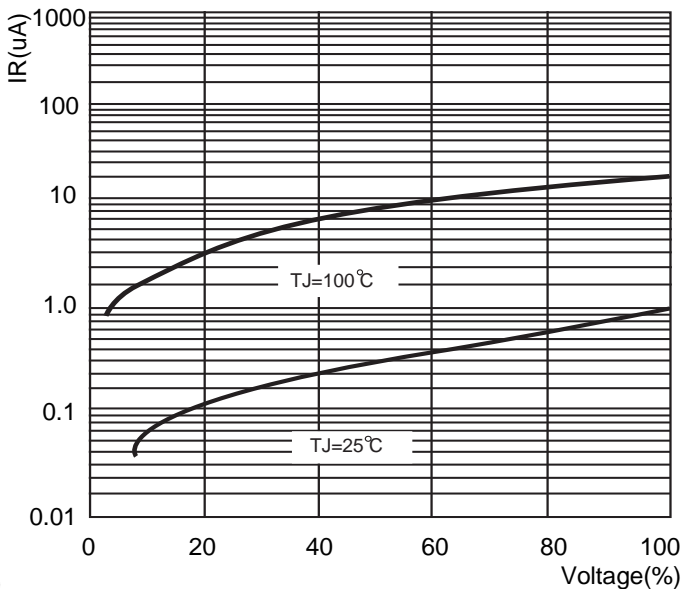


JBSL Package Outline Dimensions

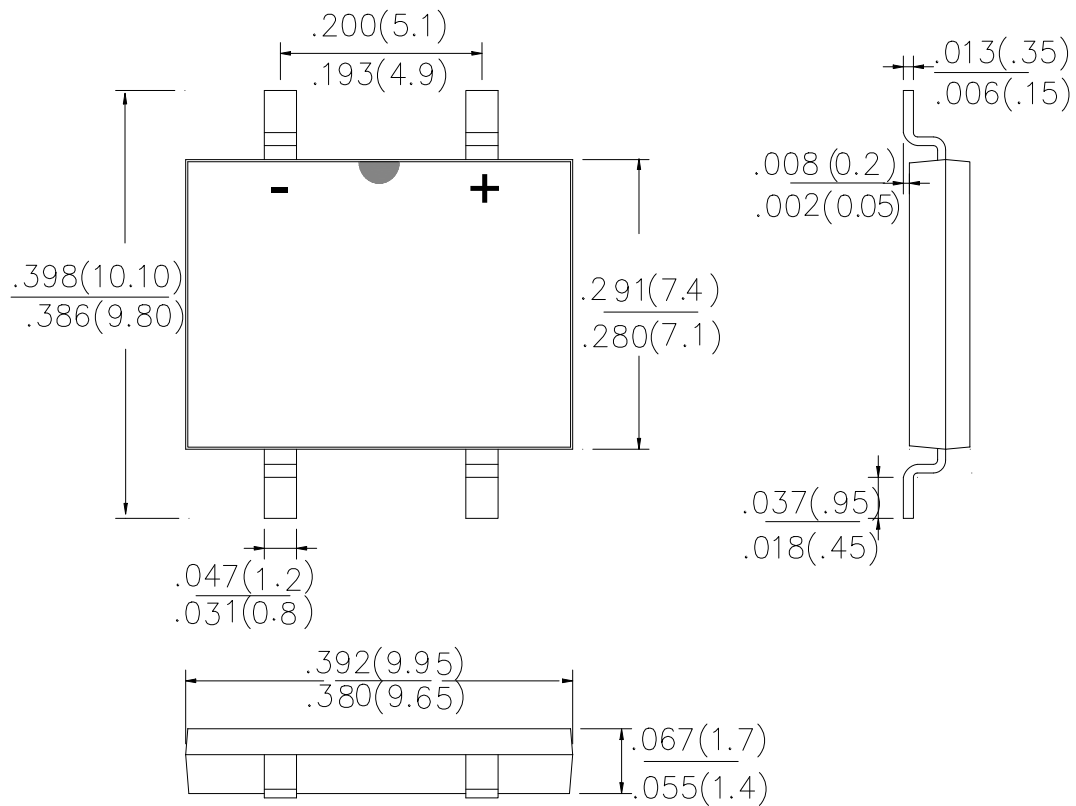

Dimensions in inches and (millimeters)

JBSL Suggested Pad Layout

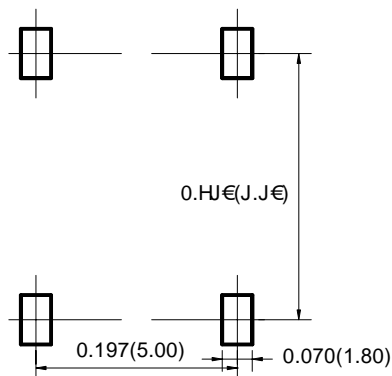

Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.

NOTICE

JSCJ reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JSCJ does not assume any liability arising out of the application or use of any product described herein.

Reel Taping Specifications For Surface Mount Devices–JBSL

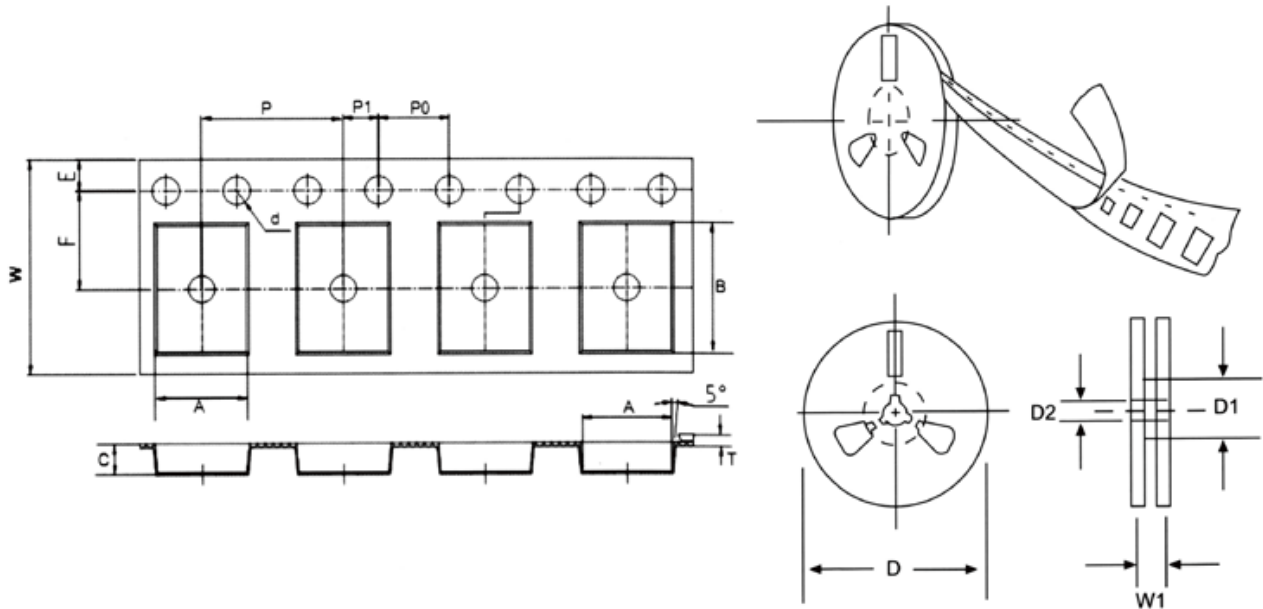


FIG: CONFIGURATION OF SURFACE MOUNTED DEVICES TAPING

ITEM	SYMBOL	ABS mm(inch)
Carrier width	A	10.10±0.1(0.398±0.004)
Carrier length	B	10.4±0.2(0.409±0.008)
Carrier depth	C	2.00±0.1(0.079±0.004)
Sprocket hole	d	1.50+0.1/-0(0.059+0.004/-0)
Reel outside diameter	D	330±2.0(13.0±0.079)
Reel inner diameter	D1	75±1.0(2.95±0.039)
Feed hole diameter	D2	13±0.5(0.512±0.020)
Sprocket hole position	E	1.75±0.1(0.069±0.004)
Punch hole position	F	11.5±0.15(0.453±0.006)
Punch hole pitch	P	12.0±0.05(0.472±0.002)
Sprocket hole pitch	P0	4.0±0.05(0.157±0.002)
Embossment center	P1	2.00±0.05(0.079±0.002)
Total tape thickness	T	0.35±0.05(0.014±0.002)
Tape width	W	24.0±0.15(0.945±0.006)
Reel width	W1	24.4±0.2(0.961±0.008)

NOTE: Devices are packed in accordance with EIA standard RS-481-A and specification given above.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [Changjing Electronics Technology](#) manufacturer:

Other Similar products are found below :

[MB2510](#) [MB252](#) [MB356G](#) [MB358G](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15K-BP](#) [GBU4A-BP](#) [GBU4D-BP](#) [GBU6B-E3/45](#) [DB101-BP](#) [DF01](#)
[DF10SA-E345](#) [BU1508-E3/45](#) [BU1510-E3/45](#) [KBPC50-10S](#) [RS405GL-BP](#) [GBJ1502-BP](#) [GBU6M](#) [GSIB1520-E3/45](#) [36MB140A](#) [TB102M](#)
[MB1510](#) [MB86](#) [TL401G](#) [MDA920A2](#) [TU602](#) [TU810](#) [MP5010W-BP](#) [MP501W-BP](#) [MP502-BP](#) [BR84DTP204](#) [BU1508-E3/51](#) [KBPC25-02](#)
[VS-110MT120KPBF](#) [VS-2KBB60](#) [VS-60MT120KPBF](#) [VS-60MT80KPBF](#) [DB105-BP](#) [DF1510S](#) [VS-40MT160PAPBF](#) [VISKBU8K-E4/51](#)
[36MT100](#) [GBU4G-BP](#) [GBU6B-E3/51](#) [DF15005S-E3/77](#) [GSIB15A80-E3/45](#) [DB104-BP](#) [D3SB60](#) [TB354](#)