


此商品编号对应的规格参数是: 10uF 63V 5\*7

此商品的实物图片为:



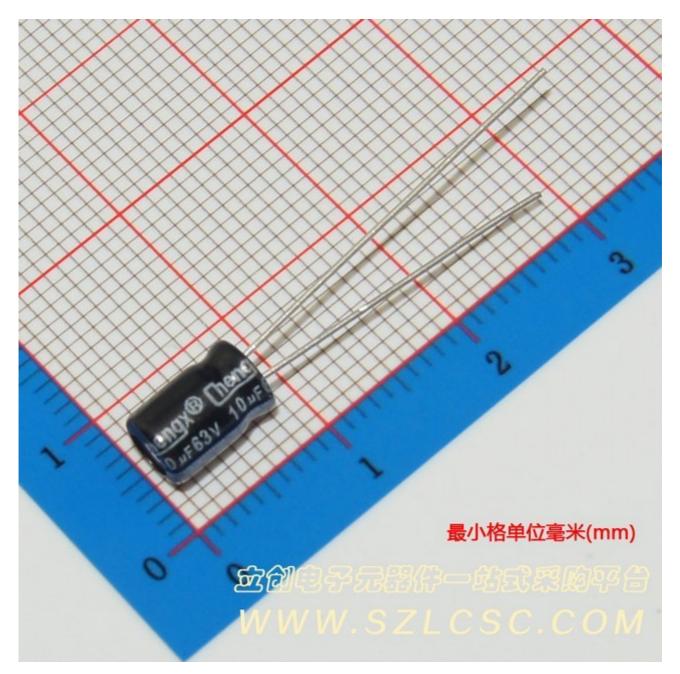

## KS Series

7mmL(高), -40°C~+105°C


### **FEATURES**

- 1. Rated working voitage range 6.3 to 50V DC operation temperature range -40 to +105°C.
- This series is for communication equipments, switching power supply, industrial measuring instruments, automotive electric products, etc.



| SPECIFICATIONS                  |   |  |      |  |      |      |      |  |  |  |
|---------------------------------|---|--|------|--|------|------|------|--|--|--|
| Item                            | Performance Charactesistics   |  |      |  |      |      |      |  |  |  |
| Operating Temperature Range     | -40 to +105°C   |  |      |  |      |      |      |  |  |  |
| Reted Working Voltage Range     | 6.3 to 50V  |  |      |  |      |      |      |  |  |  |
| Nominal Capacitance Range       | 0.1 to 220μF  | 0.1 to 220µF   |      |  |      |      |      |  |  |  |
| Capacitance Tolerance           | ±20% (120Hz, +20°C)   |  |      |  |      |      |      |  |  |  |
| Leakage Current                 | I ≤ 0.01CV or 3(μA)<br>Whichever is greater m   | ≤ 0.01CV or 3(µA)  Whichever is greater measured after 2 minutes application of rated working voltage at +20°C   |      |  |      |      |      |  |  |  |
| tan 8 (120Hz, +20°C)            | Working Voltage (V)   | 6.3  | 10   | 16   | 25   | 35   | 50   |  |  |  |
|                                 | tan δ (max.)  | 0.24   | 0.21 | 0.18   | 0.15 | 0.13 | 0.12 |  |  |  |
| Low Temperature Characteristics | Impedance ratio max. at 120Hz   |  |      |  |      |      |      |  |  |  |
|                                 | Working Voltage (V)   | 6.3  | 10   | 16   | 25   | 35   | 50   |  |  |  |
|                                 | Z-25°C / Z+20°C   | 4  | 2    | 2  | 2    | 2    | 2    |  |  |  |
|                                 | Z-40°C / Z+20°C   | 8  | 6    | 4  | 3    | 3    | 3    |  |  |  |
| High Temperature Loading        | Test conditions Duration :1000 Ambient temp. :+105 Applied voltage : Rated with the   | Post test requirements at +20°C  Leakage current: ≤ Initial specified value  Cap. Change : within±20% of initial measured value  tan δ : ≤ 200% of initial specified value |      |  |      |      |      |  |  |  |
| Shelf Life                      | Test conditions Duration : 1000 hours Ambient temp. : +105°C Applied voltage : (None) |  |      | Post test requirements at +20°C<br>Same limits for high temperature loading. |      |      |      |  |  |  |
| Others                          | JIS C - 5101 (IES 60384)  |  |      |  |      |      |      |  |  |  |

### **CASE SIZE TABLE**

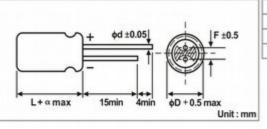

| φD | 4                   | 5    | 6.3 | 8    |  |  |  |
|----|---------------------|------|-----|------|--|--|--|
| F  | 1.5                 | 2.0  | 2.5 | 3.5  |  |  |  |
| φd |                     | 0.45 |     | 0.45 |  |  |  |
| α  | (L ≤ 7) 1 (L≥9) 1.5 |      |     |      |  |  |  |

### RIPPLE CURRENT MULTIPLIER

| Frequency Coefficient |                       |      |      |      |      |      |  |  |
|-----------------------|-----------------------|------|------|------|------|------|--|--|
| Cap(µF)               | Coefficient Freq.(Hz) | 50   | 120  | 300  | 1k   | 10k~ |  |  |
|                       | ≤ 47                  | 0.75 | 1.00 | 1.35 | 1.57 | 2.00 |  |  |
|                       | 68~470                | 0.80 | 1.00 | 1.23 | 1.34 | 1.50 |  |  |



# KS Series

## 7mmL(高), -40°C~+105°C

## STANDARD RATINGS

| Voltag    | ge (Code) | 6.3       | V (0J)         | 10\       | / (1A)         | 16\       | / (1C)         | 25\       | / (1E)         |
|-----------|-----------|-----------|----------------|-----------|----------------|-----------|----------------|-----------|----------------|
| Сар.(µ.F) | Code      | Case Size | Ripple Current |
| 0.1       | 104       |           |                |           |                |           |                |           |                |
| 0.22      | 224       |           |                |           |                |           |                |           |                |
| 0.33      | 334       |           |                |           |                |           |                |           |                |
| 0.47      | 474       |           |                |           |                |           |                |           |                |
| 1         | 105       |           |                |           |                |           |                |           |                |
| 2.2       | 225       |           |                |           |                |           |                |           |                |
| 3.3       | 335       |           |                |           |                |           |                |           |                |
| 4.7       | 475       |           |                |           |                | 20        |                |           |                |
| 10        | 106       |           |                |           |                | 4x7       | 29             | 4 x 7     | 29             |
| 22        | 226       | 4 x 7     | 34             | 4x7       | 34             | 4x7       | 38             | 5 x 7     | 45             |
| 33        | 336       | 4x7       | 37             | 4x7       | 40             | 5 x 7     | 50             | 5 x 7     | 55             |
| 47        | 476       | 4x7       | 44             | 5 x 7     | 50             | 5 x 7     | 60             | 6.3 x 7   | 67             |
| 100       | 107       | 5 x 7     | 67             | 6.3 x 7   | 83             | 6.3 x 7   | 92             | 6.3 x 7   | 95             |
| 220       | 227       | 6.3 x 7   | 112            | 8 x 7     | 140            |           |                | 8 x 7     | 158            |

Maximum Allowable Ripple Current (mA rms) at 105°C 120Hz

Case Size  $\phi D \times L(mm)$ 

| Voltag   | ge (Code) | 35\       | / (1V)         | 50\       | / (1H)         |  |  |
|----------|-----------|-----------|----------------|-----------|----------------|--|--|
| Cap.(µF) | Code      | Case Size | Ripple Current | Case Size | Ripple Current |  |  |
| 0.1      | 104       |           |                | 4x7       | 1.0            |  |  |
| 0.22     | 224       |           |                | 4x7       | 2.3            |  |  |
| 0.33     | 334       |           |                | 4x7       | 3.5            |  |  |
| 0.47     | 474       |           |                | 4x7       | 5.0            |  |  |
| 1        | 105       |           |                | 4x7       | 10             |  |  |
| 2.2      | 225       |           |                | 4x7       | 19             |  |  |
| 3.3      | 335       |           |                | 4x7       | 24             |  |  |
| 4.7      | 475       | 4x7       | 24             | 5x7       | 29             |  |  |
| 10       | 106       | 5 x 7     | 36             | 6.3 x 7   | 44             |  |  |
| 22       | 226       | 6.3 x 7   | 57             | 8x7       | 65             |  |  |
| 33       | 336       | 6.3 x 7   | 62             |           |                |  |  |
| 47       | 476       | 6.3 x 7   | 78             |           |                |  |  |
| 100      | 107       | 8 x 9     | 95             |           |                |  |  |
| 220      | 227       |           |                |           |                |  |  |

### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminium Electrolytic Capacitors - Radial Leaded category:

Click to view products by Chengxing manufacturer:

Other Similar products are found below:

NRELS102M35V16X16C.140LLF ESRG160ETC100MD07D 227RZS050M 335CKR250M 476CKH100MSA 477CKR100M 107CKR010M 107CKH063MSA RJH-25V222MI9# RJH-35V221MG5# B43827A1106M8 RJH-50V221MH6# EKYA500ELL470MF11D B41022A5686M6 ESRG250ELL101MH09D EKMA160EC3101MF07D RJB-10V471MG3# ESMG160ETD221MF11D EKZH160ETD152MJ20S RJH-35V122MJ6# EGXF630ELL621ML20S RBD-25V100KE3#N EKMA350ELL100ME07D ESMG160ETD101ME11D ELXY100ETD102MJ20S EGXF500ELL561ML15S EKMG350ETD471MJ16S 35YXA330MEFC10X12.5 RXW471M1ESA-0815 ELXZ630ELL221MJ25S ERR1HM1R0D11OT LPE681M30060FVA LPL471M22030FVA HFE221M25030FVA LKMD1401H221MF B41888G6108M000 EKMA160ETD470MF07D UHW1J102MHD6 EKMG500ETD221MJC5S LKMK2502W101MF LKMD1401H181MF LKMI2502G820MF LKMJ2001J122MF LKML2501C472MF LKMJ4002C681MF 450MXH330MEFCSN25X45 450MXK330MA2RFC22X50 63ZLH560MEFCG412.5X30 ELH2DM331O25KT ELH2DM471P30KT