


220uF 16V 8\*7

此商品的实物图片为:



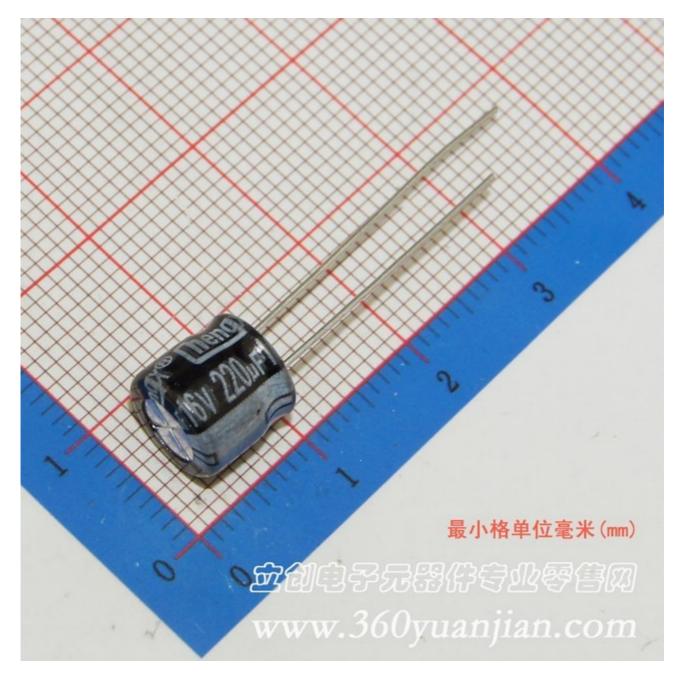

## KS Series

## 7mmL(高), -40°C~ +105°C


#### FEATURES

- 1. Rated working voitage range 6.3 to 50V DC operation temperature range -40 to +105°C.
- 2. This series is for communication equipments, switching power supply, industrial measuring instruments, automotive electric products, etc.

	_

SPECIFICATIONS										
Item	Performance Charactesistics									
Operating Temperature Range	-40 to +105°C									
Reted Working Voltage Range	6.3 to 50V									
Nominal Capacitance Range	0.1 to 220µF									
Capacitance Tolerance	±20% (120Hz, +20°C)									
Leakage Current	I ≤ 0.01CV or 3(μA) Whichever is greater measured after 2 minutes application of rated working voltage at +20°C									
tan δ (120Hz, +20°C)	Working Voltage (V)	6.3	10	16	25	35	50			
	tan 8 (max.)	0.24	0.21	0.18	0.15	0.13	0.12			
Low Temperature Characteristics	Impedance ratio max. at 120Hz									
	Working Voltage (V)	6.3	10	16	25	35	50			
	Z-25°C / Z+20°C	4	2	2	2	2	2			
	Z-40°C / Z+20°C	8	6	4	3	3	3			
High Temperature Loading	Test conditions Duration :1000 Ambient temp. :+105 Applied voltage : Rated with	$\begin{array}{llllllllllllllllllllllllllllllllllll$								
Shelf Life	Test conditions Duration : 1000 Ambient temp. : +105 Applied voltage : (Non	Post test requirements at +20°C Same limits for high temperature loading.								
Others	JIS C - 5101 (IES 603	384)								

#### CASE SIZE TABLE

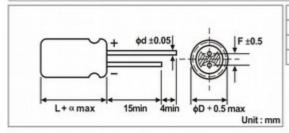

φD	4	5	6.3	8		
F	1.5	2.0	2.5	3.5		
φd	0.45 0.45			0.45		
α	(L s	∈7)1	(L≥9	1.5		

#### RIPPLE CURRENT MULTIPLIER

Frequency Coefficient							
Cap(µF)	Coefficient Freq.(Hz)	50	120	300	1k	10k~	
	≤ 47	0.75	1.00	1.35	1.57	2.00	
	68~470	0.80	1.00	1.23	1.34	1.50	



# KS Series

7mmL(高), -40°C~+105°C

## STANDARD RATINGS

Voltag	e (Code)	6.3	V (0J)	/ (0J) 10V (1A)		16\	/ (1C)	25	5V (1E)	
Cap.(µF)	Code	Case Size	Ripple Current	Case Size	Ripple Current	Case Size	<b>Ripple Current</b>	Case Size	Ripple Current	
0.1	104									
0.22	224									
0.33	334									
0.47	474									
1	105									
2.2	225									
3.3	335									
4.7	475									
10	106					4x7	29	4x7	29	
22	226	4x7	34	4x7	34	4x7	38	5x7	45	
33	336	4x7	37	4x7	40	5x7	50	5x7	55	
47	476	4x7	44	5x7	50	5x7	60	6.3 x 7	67	
100	107	5x7	67	6.3 x 7	83	6.3 x 7	92	6.3 x 7	95	
220	227	6.3 x 7	112	8x7	140			8x7	158	

Maximum Allowable Ripple Current (mA rms) at 105°C 120Hz

Case Size ¢D x L(mm)

Voltag	e (Code)	35\	/ (1V)	50\	/ (1H)		
Cap.(µF)	Code	Case Size	Ripple Current	Case Size	Ripple Current		
0.1	104			4x7	1.0		
0.22	224			4x7	2.3		
0.33	334			4x7	3.5		
0.47	474			4x7	5.0		
1	105			4x7	10		
2.2	225			4x7	19		
3.3	335			4x7	24		
4.7	475	4x7	24	5x7	29		
10	106	5x7	36	6.3 x 7	44		
22	226	6.3 x 7	57	8x7	65		
33	336	6.3 x 7	62				
47	476	6.3 x 7	78				
100	107	8x9	95				
220	227						

Maximum Allowable Ripple Current (mA rms) at 105°C 120Hz

Case Size ¢D x L(mm)

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminium Electrolytic Capacitors - Radial Leaded category:

Click to view products by Chengxing manufacturer:

Other Similar products are found below :

NRELS102M35V16X16C.140LLF ESRG160ETC100MD07D 227RZS050M 335CKR250M 476CKH100MSA 477CKR100M 107CKR010M 107CKH063MSA RJH-25V222MI9# RJH-35V221MG5# B43827A1106M8 RJH-50V221MH6# EKYA500ELL470MF11D B41022A5686M6 ESRG250ELL101MH09D EKMA160EC3101MF07D RJB-10V471MG3# ESMG160ETD221MF11D EKZH160ETD152MJ20S RJH-35V122MJ6# EGXF630ELL621ML20S RBD-25V100KE3#N EKMA350ELL100ME07D ESMG160ETD101ME11D ELXY100ETD102MJ20S EGXF500ELL561ML15S EKMG350ETD471MJ16S 35YXA330MEFC10X12.5 RXW471M1ESA-0815 ELXZ630ELL221MJ25S ERR1HM1R0D110T LPE681M30060FVA LPL471M22030FVA HFE221M25030FVA LKMD1401H221MF B41888G6108M000 EKMA160ETD470MF07D UHW1J102MHD6 EKMG500ETD221MJC5S LKMK2502W101MF LKMD1401H181MF LKMI2502G820MF LKMJ2001J122MF LKML2501C472MF LKMJ4002C681MF 450MXH330MEFCSN25X45 450MXK330MA2RFC22X50 63ZLH560MEFCG412.5X30 ELH2DM331025KT ELH2DM471P30KT