


此商品编号对应的规格参数是: 47uF 16V 5*5

此商品的实物图片为:



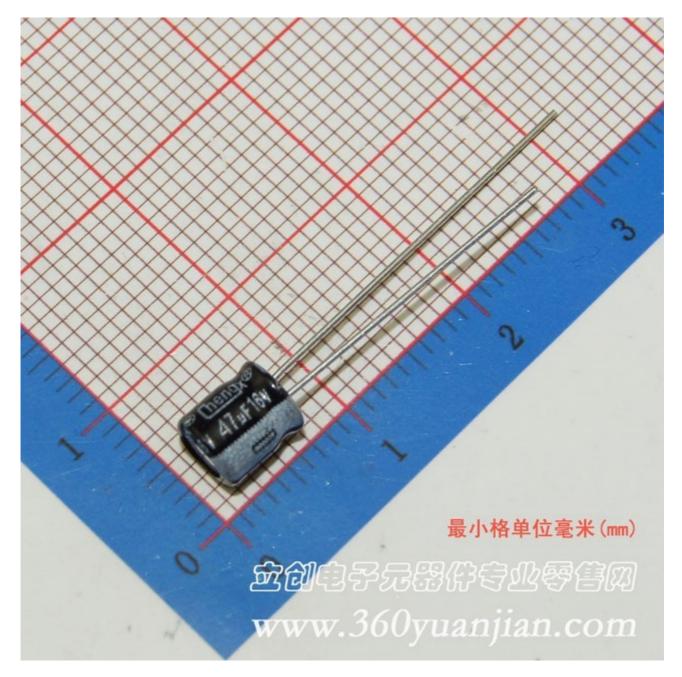

KF Series

5mmL(高), +105°C

FEATURES


1. Super miniature, 5mmL, high temperature, suitable for use in electronic circuit of high density assembly of videocorder, remote controller, VCD etc.

20	

SPECIFICATIONS

Item	Performance Characteristics									
Operating Temperature Range	-40 to +105°C									
Rated Working Voltage Range	4 to 50V	4 to 50V								
Nominal Capacitance Range	0.1 to 330µF									
Capacitance Tolerance	±20% (120Hz, +20°C)									
Leakage Current	I ≤ 0.01CV or 3(μA) whichever is greater measured after 2 minutes application of rated working voltage at +20 C									
tan δ (120Hz, +20°C)	Working Voltage (V)	4	6.3	10	16	25	35	50		
	tan δ (max.)	0.37	0.28	0.24	0.20	0.16	0.13	0.12		
Low Temperature Characteristics	Impedance ratio max. at 120Hz									
	Working Voltage (V)	4	6.3	10	16	25	35	50		
	Z-25°C / Z+20°C	6	3	3	2	2	2	2		
	Z-40°C / Z+20°C	12	8	5	4	3	3	3		
High Temperature Loading	Test conditions Duration : 1000 Ambient temp. : +105 Applied voltage : Rated with t	Post test requirements at +20°C Leakage current : ≤ Initial specified value Cap. change : within ±20% of initial measured value (4V: within±30%) tan δ : ≤200% of initial specified value								
Shelf Life	Test conditions Duration : 1000 Ambient temp. : +105 Applied voltage : (Non	Leal	kage curre . change	(4V: withi	ecified valu)% of initial	measured value				
Others	JIS C - 5101 (IEC 603									
	Research and the for a second state of the sec									

CASE SIZE TABLE

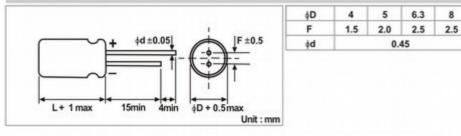

RIPPLE CURRENT MULTIPLIER

Frequency Coefficient							
Cap(µF)	Coefficient Freq.(Hz)	50	120	300	1k	10k~	
0.000	≤ 47	0.75	1.00	1.35	1.57	2.00	
	68~330	0.80	1.00	1.23	1.34	1.50	



KF Series

5mmL(高), +105°C

STANDARD RATINGS

Voltage (Code)		4V	(0G)	6.3V (0J)		10\	/ (1A)	16V (1C)	
Cap.(µF)	Code	Case Size	Ripple Current	Case Size	Ripple Current	Case Size	Ripple Current	Case Size	Ripple Current
0.1	104								
0.22	224								
0.33	334								
0.47	474								
1	105								
2.2	225								
3.3	335								
4.7	475								
10	106							4 x 5	18
22	226	4x5	22	4x5	22	4x5	24	5 x 5	30
33	336	5 x 5	30	5 x 5	30	5 x 5	35	6.3 x 5	40
47	476	5 x 5	36	5 x 5	36	6.3 x 5	46	6.3 x 5	50
100	107	6.3 x 5	60	6.3 x 5	60	6.3 x 5	67	6.3 x 5	73
220	227			8 x 5	103	8 x 5	116	8 x 5	126
330	337			8x5	127				

Maximum Allowable Ripple Current (mA rms) at 105°C 120Hz

Case Size oD x L(mm)

Voltage (Code)		25V (1E)		35V (1V)		50V (1H)		
Cap.(µF)	Code	Case Size	Ripple Current	Case Size	Ripple Current	Case Size	Ripple Current	
0.1	104					4 x 5	1.0	
0.22	224					4 x 5	2.6	
0.33	334					4 x 5	3.2	
0.47	474					4 x 5	3.8	
1	105					4x5	6.2	
2.2	225			4 x 5	7	4 x 5	11	
3.3	335			5 x 5	11	4 x 5	14	
4.7	475	4 x 5	13	4 x 5	15	5 x 5	19	
10	106	5 x 5	20	5 x 5	25	6.3 x 5	30	
22	226	6.3 x 5	38	6.3 x 5	48	8 x 5	52	
33	336	6.3 x 5	48	6.3 x 5	59	8 x 5	63	
47	476	6.3 x 5	58	8 x 5	82			
100	107	8x5	97					

Maximum Allowable Ripple Current (mA rms) at 105°C 120Hz

Case Size oD x L(mm)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminium Electrolytic Capacitors - Radial Leaded category:

Click to view products by Chengxing manufacturer:

Other Similar products are found below :

NRELS102M35V16X16C.140LLF ESRG160ETC100MD07D 227RZS050M 335CKR250M 476CKH100MSA 477CKR100M 107CKR010M 107CKH063MSA RJH-25V222MI9# RJH-35V221MG5# B43827A1106M8 RJH-50V221MH6# EKYA500ELL470MF11D B41022A5686M6 ESRG250ELL101MH09D EKMA160EC3101MF07D RJB-10V471MG3# ESMG160ETD221MF11D EKZH160ETD152MJ20S RJH-35V122MJ6# EGXF630ELL621ML20S RBD-25V100KE3#N EKMA350ELL100ME07D ESMG160ETD101ME11D ELXY100ETD102MJ20S EGXF500ELL561ML15S EKMG350ETD471MJ16S 35YXA330MEFC10X12.5 RXW471M1ESA-0815 ELXZ630ELL221MJ25S ERR1HM1R0D110T LPE681M30060FVA LPL471M22030FVA HFE221M25030FVA LKMD1401H221MF B41888G6108M000 EKMA160ETD470MF07D UHW1J102MHD6 EKMG500ETD221MJC5S LKMK2502W101MF LKMD1401H181MF LKMI2502G820MF LKMJ2001J122MF LKML2501C472MF LKMJ4002C681MF 450MXH330MEFCSN25X45 450MXK330MA2RFC22X50 63ZLH560MEFCG412.5X30 ELH2DM331025KT ELH2DM471P30KT