


此商品编号对应的规格参数是: 47uF 25V 5\*7

此商品的实物图片为:



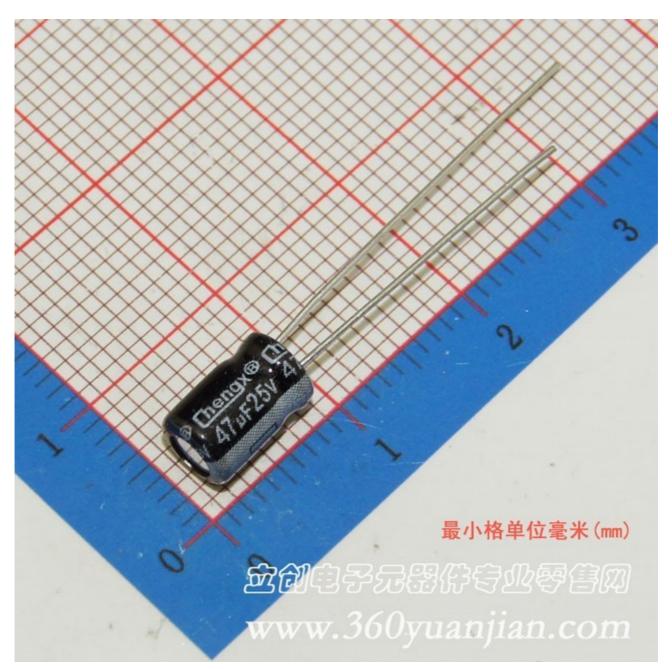

## KS Series

7mmL(高), -40°C~+105°C


### **FEATURES**

- 1. Rated working voitage range 6.3 to 50V DC operation temperature range -40 to +105°C.
- This series is for communication equipments, switching power supply, industrial measuring instruments, automotive electric products, etc.



SPECIFICATIONS										
Item	Performance Charactesistics									
Operating Temperature Range	-40 to +105°C									
Reted Working Voltage Range	6.3 to 50V									
Nominal Capacitance Range	0.1 to 220μF	0.1 to 220µF								
Capacitance Tolerance	±20% (120Hz, +20°C)									
Leakage Current	I ≤ 0.01CV or 3(μA) Whichever is greater m	≤ 0.01CV or 3(µA)  Whichever is greater measured after 2 minutes application of rated working voltage at +20°C								
tan 8 (120Hz, +20°C)	Working Voltage (V)	6.3	10	16	25	35	50			
	tan δ (max.)	0.24	0.21	0.18	0.15	0.13	0.12			
Low Temperature Characteristics	Impedance ratio max. at 120Hz									
	Working Voltage (V)	6.3	10	16	25	35	50			
	Z-25°C / Z+20°C	4	2	2	2	2	2			
	Z-40°C / Z+20°C	8	6	4	3	3	3			
High Temperature Loading	Test conditions Duration :1000 Ambient temp. :+105 Applied voltage : Rated with the	Post test requirements at +20°C  Leakage current: ≤ Initial specified value  Cap. Change : within±20% of initial measured value  tan δ : ≤ 200% of initial specified value								
Shelf Life	Test conditions Duration : 1000 hours Ambient temp. : +105°C Applied voltage : (None)			Post test requirements at +20°C Same limits for high temperature loading.						
Others	JIS C - 5101 (IES 60384)									

### **CASE SIZE TABLE**

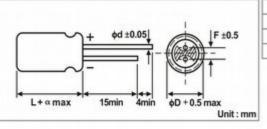

φD	4	5	6.3	8			
F	1.5	2.0	2.5	3.5			
φd		0.45		0.45			
α	(L ≤ 7) 1 (L≥9) 1.5						

### RIPPLE CURRENT MULTIPLIER

Frequency Coefficient								
Cap(µF)	Coefficient Freq.(Hz)	50	120	300	1k	10k~		
	≤ 47	0.75	1.00	1.35	1.57	2.00		
	68~470	0.80	1.00	1.23	1.34	1.50		



# KS Series

## 7mmL(高), -40°C~+105°C

## STANDARD RATINGS

Voltag	ge (Code)	6.3	V (0J)	10\	/ (1A)	16\	/ (1C)	25\	/ (1E)
Сар.(µ.F)	Code	Case Size	Ripple Current						
0.1	104								
0.22	224								
0.33	334								
0.47	474								
1	105								
2.2	225								
3.3	335								
4.7	475					20			
10	106					4x7	29	4 x 7	29
22	226	4 x 7	34	4x7	34	4x7	38	5 x 7	45
33	336	4x7	37	4x7	40	5 x 7	50	5 x 7	55
47	476	4x7	44	5 x 7	50	5 x 7	60	6.3 x 7	67
100	107	5 x 7	67	6.3 x 7	83	6.3 x 7	92	6.3 x 7	95
220	227	6.3 x 7	112	8 x 7	140			8 x 7	158

Maximum Allowable Ripple Current (mA rms) at 105°C 120Hz

Case Size  $\phi D \times L(mm)$ 

Voltag	ge (Code)	35\	/ (1V)	50\	/ (1H)		
Cap.(µF)	Code	Case Size	Ripple Current	Case Size	Ripple Current		
0.1	104			4x7	1.0		
0.22	224			4x7	2.3		
0.33	334			4x7	3.5		
0.47	474			4x7	5.0		
1	105			4x7	10		
2.2	225			4x7	19		
3.3	335			4x7	24		
4.7	475	4x7	24	5x7	29		
10	106	5 x 7	36	6.3 x 7	44		
22	226	6.3 x 7	57	8x7	65		
33	336	6.3 x 7	62				
47	476	6.3 x 7	78				
100	107	8 x 9	95				
220	227						

### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminium Electrolytic Capacitors - Radial Leaded category:

Click to view products by Chengxing manufacturer:

Other Similar products are found below:

NRELS102M35V16X16C.140LLF ESRG160ETC100MD07D 227RZS050M 335CKR250M 476CKH100MSA 477CKR100M 107CKR010M 107CKH063MSA RJH-25V222MI9# RJH-35V221MG5# B43827A1106M8 RJH-50V221MH6# EKYA500ELL470MF11D B41022A5686M6 ESRG250ELL101MH09D EKMA160EC3101MF07D RJB-10V471MG3# ESMG160ETD221MF11D EKZH160ETD152MJ20S RJH-35V122MJ6# EGXF630ELL621ML20S RBD-25V100KE3#N EKMA350ELL100ME07D ESMG160ETD101ME11D ELXY100ETD102MJ20S EGXF500ELL561ML15S EKMG350ETD471MJ16S 35YXA330MEFC10X12.5 RXW471M1ESA-0815 ELXZ630ELL221MJ25S ERR1HM1R0D11OT LPE681M30060FVA LPL471M22030FVA HFE221M25030FVA LKMD1401H221MF B41888G6108M000 EKMA160ETD470MF07D UHW1J102MHD6 EKMG500ETD221MJC5S LKMK2502W101MF LKMD1401H181MF LKMI2502G820MF LKMJ2001J122MF LKML2501C472MF LKMJ4002C681MF 450MXH330MEFCSN25X45 450MXK330MA2RFC22X50 63ZLH560MEFCG412.5X30 ELH2DM331O25KT ELH2DM471P30KT