


100uF 10V 黑金 5\*7

此商品的实物图片为:



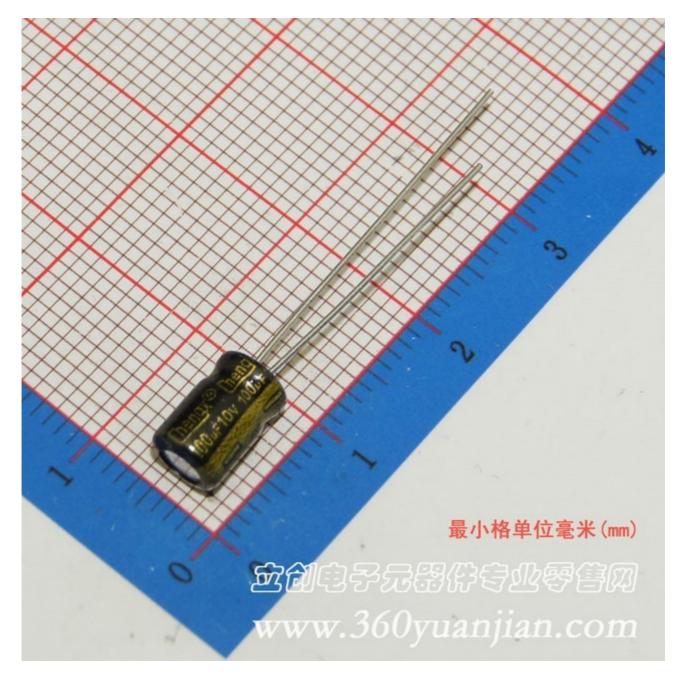

ZF Series 7mmL(高), +105℃, Low Impedance(低阻抗品)

#### FEATURES


1. Low Impedance, with 7mm height, wide operating temperature range.

|   | -     | ŀ  | -                   |        |
|---|-------|----|---------------------|--------|
|   | 10    | ĺ. |                     |        |
| - |       | ŗ  |                     |        |
|   | - C - |    | CHENGE<br>A La Part | CHENGE |

### SPECIFICATIONS

| Item                            | Performance Characteristics   |   |      |      |      |      |  |  |  |
|---------------------------------|---|---|------|------|------|------|--|--|--|
| Operating Temperature Range     | -40 to +105°C   |   |      |      |      |      |  |  |  |
| Reted Working Voltage Range     | 6.3 to 35V  |   |      |      |      |      |  |  |  |
| Nominal Capacitance Range       | 6.8 to 220µF  |   |      |      |      |      |  |  |  |
| Capacitance Tolerance           | ±20% (120Hz, +20°C)   |   |      |      |      |      |  |  |  |
| Leakage Current                 | $I \leq 0.01 CV$ or 3(µA) whichever is greater measured after 2 minutes application of rated working voltage at +20°C |   |      |      |      |      |  |  |  |
| tanδ (120Hz, +20°C)             | Working Voltage (V)   | 6.3   | 10   | 16   | 25   | 35   |  |  |  |
|                                 | tan δ (max.)  | 0.18  | 0.16 | 0.14 | 0.12 | 0.12 |  |  |  |
| Low Temperature Characteristics | Impedance ratio max. at 120Hz   |   |      |      |      |      |  |  |  |
|                                 | Working Voltage (V)   | 6.3   | 10   | 16   | 25   | 35   |  |  |  |
|                                 | Z-25°C / Z+20°C   | 2   | 2    | 2    | 2    | 2    |  |  |  |
|                                 | Z-40°C / Z+20°C   | 3   | 3    | 3    | 3    | 3    |  |  |  |
| High Temperature Loading        | Test conditions<br>Duration : 1000<br>Ambient temp. :+105<br>Applied voltage : Rate<br>with                           | Post test requirements at +20°CLeakage current : $\leq$ Initial specified valueCap. change: within ±20% of initial measured valuetan $\delta$ : $\leq$ 200% of initial specified value              |      |      |      |      |  |  |  |
| Shelf Life                      | Test conditions<br>Duration : 1000<br>Ambient temp. :+105<br>Applied voltage : (Non                                   | Post test requirements at +20°C<br>Leakage current : $\leq$ Initial specified value<br>Cap. change : within ±20% of initial measured value<br>tan $\delta$ : $\leq$ 200% of initial specified value |      |      |      |      |  |  |  |
| Others                          | JIS C - 5101 (IEC 60384)  |   |      |      |      |      |  |  |  |

#### CASE SIZE TABLE

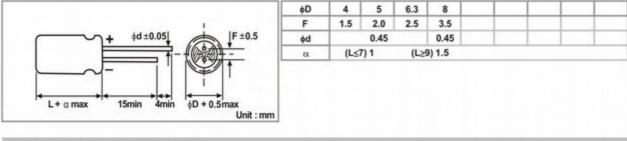

#### RIPPLE CURRENT MULTIPLIER

| Frequency Coefficient |                       |      |      |      |      |  |
|-----------------------|-----------------------|------|------|------|------|--|
| Cap(µF)               | Coefficient Freq.(Hz) | 120  | 1k   | 10k  | 100k |  |
| 3                     | ~ 180                 | 0.40 | 0.75 | 0.90 | 1.00 |  |
|                       | 220                   | 0.50 | 0.85 | 0.94 | 1.00 |  |



# ZF Series

## 7mmL(高), +105°C, Low Impedance(低阻抗品)

| Voltage (Code) |      |           | 6.3V (0J) |                |           | 10V (1A)  |                |           | 16V (1C)  |               |  |
|----------------|------|-----------|-----------|----------------|-----------|-----------|----------------|-----------|-----------|---------------|--|
| Cap.(µF)       | Code | Case Size | Impedance | Ripple Current | Case Size | Impedance | Ripple Current | Case Size | Impedance | Ripple Curren |  |
| 6.8            | 685  |           |           |                |           |           |                |           |           |               |  |
| 10             | 106  |           |           |                |           |           |                |           |           |               |  |
| 15             | 156  |           |           |                |           |           |                | 4 x 7     | 3.3       | 70            |  |
| 22             | 226  |           |           |                | 4x7       | 3.3       | 70             | 5x7       | 1.7       | 110           |  |
| 33             | 336  | 5x7       | 1.7       | 110            | 5x7       | 1.7       | 110            | 6.3 x 7   | 0.8       | 160           |  |
| 47             | 476  | 5x7       | 1.7       | 110            | 6.3 x 7   | 0.8       | 160            | 6.3 x 7   | 0.8       | 160           |  |
| 68             | 686  | 6.3 x 7   | 0.8       | 160            | 6.3 x 7   | 0.8       | 160            | 8x7       | 0.5       | 200           |  |
| 100            | 107  | 6.3 x7    | 0.8       | 160            | 8x7       | 0.5       | 200            | 8x7       | 0.5       | 200           |  |
| 150            | 157  | 8x7       | 0.5       | 200            | 8x7       | 0.5       | 200            |           |           |               |  |
| 220            | 227  | 8x7       | 0.5       | 200            |           |           |                |           |           |               |  |

Maximum Allowable Ripple Current (mA rms) at 105°C 100kHz

Maximum Impedance (Ω) at 20°C 100kHz

25V (1E) 35V (1V) Voltage(Code) Impedance Ripple Current Case Size Impedance Ripple Current Cap.(µF) Code Case Size 685 4x7 70 6.8 3.3 10 106 3.3 70 4x7 5x7 1.7 110 1.7 15 156 5x7 110 6.3x7 0.8 160 22 226 5x7 1.7 110 6.3x7 0.8 160 33 336 6.3x7 0.8 160 8x7 0.5 200 47 476 8x7 0.5 200 68 686 8x7 200 0.5

Maximum Allowable Ripple Current (mA rms) at 105°C 100kHz

Case Size ¢D x L(mm)

Maximum Impedance (Ω) at 20°C 100kHz

Case Size ¢D x L(mm)

### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminium Electrolytic Capacitors - Radial Leaded category:

Click to view products by Chengxing manufacturer:

Other Similar products are found below :

NRELS102M35V16X16C.140LLF ESRG160ETC100MD07D 227RZS050M 335CKR250M 476CKH100MSA 477CKR100M 107CKR010M 107CKH063MSA RJH-25V222MI9# RJH-35V221MG5# B43827A1106M8 RJH-50V221MH6# EKYA500ELL470MF11D B41022A5686M6 ESRG250ELL101MH09D EKMA160EC3101MF07D RJB-10V471MG3# ESMG160ETD221MF11D EKZH160ETD152MJ20S RJH-35V122MJ6# EGXF630ELL621ML20S RBD-25V100KE3#N EKMA350ELL100ME07D ESMG160ETD101ME11D ELXY100ETD102MJ20S EGXF500ELL561ML15S EKMG350ETD471MJ16S 35YXA330MEFC10X12.5 RXW471M1ESA-0815 ELXZ630ELL221MJ25S ERR1HM1R0D110T LPE681M30060FVA LPL471M22030FVA HFE221M25030FVA LKMD1401H221MF B41888G6108M000 EKMA160ETD470MF07D UHW1J102MHD6 EKMG500ETD221MJC5S LKMK2502W101MF LKMD1401H181MF LKMI2502G820MF LKMJ2001J122MF LKML2501C472MF LKMJ4002C681MF 450MXH330MEFCSN25X45 450MXK330MA2RFC22X50 63ZLH560MEFCG412.5X30 ELH2DM331025KT ELH2DM471P30KT