


此商品编号对应的规格参数是: 470uF 16V 8*7 黑高频

此商品的实物图片为:



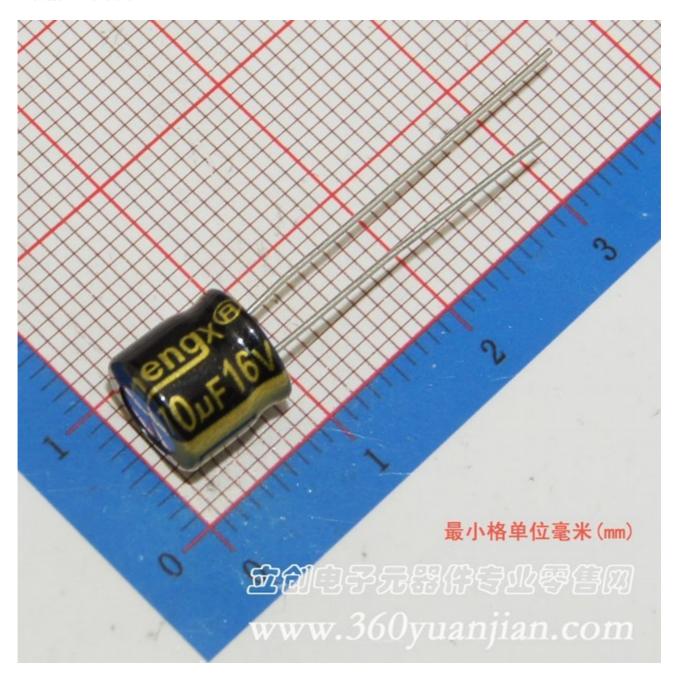

ZF Series

7mmL(高), +105°C, Low Impedance(低阻抗品)


FEATURES

1. Low Impedance, with 7mm height, wide operating temperature range.



Item	Performance Characteristics										
Operating Temperature Range	-40 to +105°C										
Reted Working Voltage Range	6.3 to 35V										
Nominal Capacitance Range	6.8 to 220µF										
Capacitance Tolerance	±20% (120Hz, +20°C)										
Leakage Current	I ≤ 0.01CV or 3(μA) whichever is greater me	inchever is greater measured after 2 minutes application of rated working voltage at +20°C									
tan δ (120Hz, +20°C)	Working Voltage (V)	6.3	10	16	25	35					
70004.000.000	tan δ (max.)	0.18	0.16	0.14	0.12	0.12					
Low Temperature Characteristics	Impedance ratio max. at 120Hz										
	Working Voltage (V)	6.3	10	16	25	35					
	Z-25°C / Z+20°C	2	2	2	2	2					
	Z-40°C / Z+20°C	3	3	3	3	3					
High Temperature Loading	Test conditions Duration : 1000 Ambient temp. :+105 Applied voltage : Rate with	Post test requirements at +20°C Leakage current : ≤ Initial specified value Cap. change : within ±20% of initial measured value tan δ :≤ 200% of initial specified value									
Shelf Life	Test conditions Duration : 1000 hours Ambient temp. :+105°C Applied voltage : (None)			Post test requirements at +20°C Leakage current : ≤ Initial specified value Cap. change : within ±20% of initial measured value tan δ : ≤ 200% of initial specified value							
Others	JIS C - 5101 (IEC 60:			tarr		. 2 200 70 01	mana opconica value				

CASE SIZE TABLE

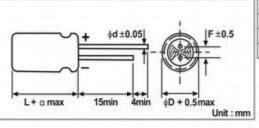

φD	4	5	6.3	8		
F	1.5	2.0	2.5	3.5		
φd	0.45			0.45		
α				9) 1.5		

RIPPLE CURRENT MULTIPLIER

Frequency Coefficient									
Cap(µF)	Coefficient Freq.(Hz)	120	1k	10k	100k				
3	~ 180	0.40	0.75	0.90	1.00				
1	220	0.50	0.85	0.94	1.00				



ZF Series

7mmL(高), +105°C, Low Impedance(低阻抗品)

STANDARD RATINGS

Voltag	e(Code)		6.3V (0J)			10V (1A)		16V (1C)		
Cap.(µF)	Code	Case Size	Impedance	Ripple Current	Case Size	Impedance	Ripple Current	Case Size	Impedance	Ripple Curren
6.8	685									
10	106									
15	156							4 x 7	3.3	70
22	226				4 x 7	3.3	70	5x7	1.7	110
33	336	5 x 7	1.7	110	5 x 7	1.7	110	6.3 x 7	0.8	160
47	476	5 x 7	1.7	110	6.3 x 7	0.8	160	6.3 x 7	0.8	160
68	686	6.3 x 7	0.8	160	6.3 x 7	0.8	160	8x7	0.5	200
100	107	6.3 x7	0.8	160	8x7	0.5	200	8x7	0.5	200
150	157	8 x 7	0.5	200	8 x 7	0.5	200			
220	227	8 x 7	0.5	200						

Maximum Allowable Ripple Current (mA rms) at 105°C 100kHz

Case Size $\phi D \times L(mm)$

Maximum Impedance (Ω) at 20°C 100kHz

Voltage(Code) 25V (1E)			35V (1V)						
Cap.(µF)	Code	Case Size	Impedance	Ripple Current	Case Size	Impedance	Ripple Current		
6.8	685				4 x 7	3.3	70		
10	106	4 x 7	3.3	70	5x7	1.7	110		
15	156	5x7	1.7	110	6.3 x 7	0.8	160		
22	226	5x7	1.7	110	6.3 x 7	0.8	160		
33	336	6.3 x 7	0.8	160	8x7	0.5	200		
47	476	8x7	0.5	200					
68	686	8x7	0.5	200					

Maximum Allowable Ripple Current (mA rms) at 105°C 100kHz

Case Size $\phi D \times L(mm)$

Maximum Impedance (Ω) at 20°C 100kHz

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminium Electrolytic Capacitors - Radial Leaded category:

Click to view products by Chengxing manufacturer:

Other Similar products are found below:

NRELS102M35V16X16C.140LLF ESRG160ETC100MD07D 227RZS050M 335CKR250M 476CKH100MSA 477CKR100M 107CKR010M 107CKH063MSA RJH-25V222MI9# RJH-35V221MG5# B43827A1106M8 RJH-50V221MH6# EKYA500ELL470MF11D B41022A5686M6 ESRG250ELL101MH09D EKMA160EC3101MF07D RJB-10V471MG3# ESMG160ETD221MF11D EKZH160ETD152MJ20S RJH-35V122MJ6# EGXF630ELL621ML20S RBD-25V100KE3#N EKMA350ELL100ME07D ESMG160ETD101ME11D ELXY100ETD102MJ20S EGXF500ELL561ML15S EKMG350ETD471MJ16S 35YXA330MEFC10X12.5 RXW471M1ESA-0815 ELXZ630ELL221MJ25S ERR1HM1R0D11OT LPE681M30060FVA LPL471M22030FVA HFE221M25030FVA LKMD1401H221MF B41888G6108M000 EKMA160ETD470MF07D UHW1J102MHD6 EKMG500ETD221MJC5S LKMK2502W101MF LKMD1401H181MF LKMI2502G820MF LKMJ2001J122MF LKML2501C472MF LKMJ4002C681MF 450MXH330MEFCSN25X45 450MXK330MA2RFC22X50 63ZLH560MEFCG412.5X30 ELH2DM331O25KT ELH2DM471P30KT