


此商品编号对应的规格参数是: 22uF 16V 4*5 黑高频

此商品的实物图片为:



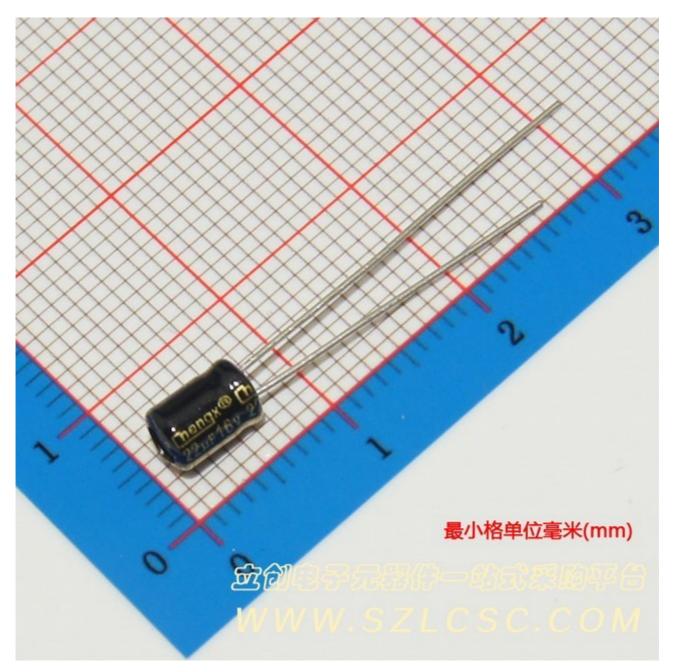

EF Series 5mmL(高), +105°C, Low Impedance(低阻抗品)

FEATURES

1. Low Impedance over wide temperature range of -40°C~105°C, with 5mm height.


2. Suitable for DC-DC converters where smaller case size and lower impedance are required.

		_
	_	

SPECIFICATIONS

or con torritorito										
Item	Performance Charactesistics									
Operating Temperature Range	-40 to +105°C									
Reted Working Voltage Range	6.3 to 35V									
Nominal Capacitance Range	1 to 100µF									
Capacitance Tolerance	±20% (120Hz, +20°C)									
Leakage Current	I ≤ 0.01CV or 3(μA) whichever is greater measured after 2 minutes application of rated working voltage at +20°C									
tanδ (120Hz, +20°C)	Working Voltage (V)	6.3	10	16	25	35				
	tan δ (max.)	0.22	0.20	0.18	0.14	0.12				
Low Temperature Characteristics	Impedance ratio max. at 120Hz									
	Working Voltage (V)	6.3	10	16	25	35				
	Z-25°C / Z+20°C	2	3	2	2	2				
	Z-40°C / Z+20°C	4	8	6	3	3				
High Temperature Loading	Test conditions Duration : 1000 Ambient temp. :+105 Applied voltage : Rate with	Post test requirements at +20°C Leakage current : \leq Initial specified value Cap. change : within ±20% of initial measured value tan δ : \leq 200% of initial specified value								
Shelf Life	Test conditions	Post test requirements at +20°C								
	Duration : 1000	Leak	Leakage current : ≤ Initial specified value							
	Ambient temp. :+105	Cap. change		: within $\pm 20\%$ of initial measured value						
	Applied voltage : (Non	e)		$\tan \delta$: \leq 200% of initial specified value				Ð		
Others	JIS C - 5101 (IEC 603	384)								
								_		

CASE SIZE TABLE

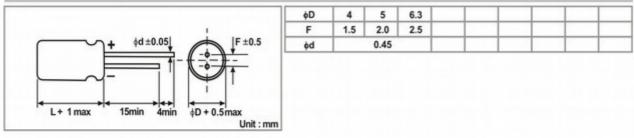

RIPPLE CURRENT MULTIPLIER

Frequency Coefficient					
Cap(µF) Coefficient Freq.(Hz)	120	1k	10k	100k	
~ 100	0.40	0.75	0.90	1.00	



EF Series

5mmL(高), +105°C, Low Impedance(低阻抗品)

STANDARD RATINGS

Voltage (Code)		6.3V (0J)			10V (1A)			16V (1C)		
Cap.(µF)	Code	Case Size	Impedance	Ripple Current	Case Size	Impedance	Ripple Current	Case Size	Impedance	Ripple Current
1	105									
1.5	155									
2.2	225									
3.3	335									
4.7	475									
6.8	685									
10	106							4x5	5.0	50
15	156							5x5	2.6	80
22	226	4 x 5	5.0	50	5 x 5	2.6	80	5 x 5	2.6	80
33	336	5 x 5	2.6	80	5 x 5	2.6	80	6.3 x 5	1.3	115
47	476	5 x 5	2.6	80	6.3 x 5	1.3	115	6.3 x 5	1.3	115
68	686	6.3 x 5	1.3	115						
100	107	6.3 x 5	1.3	115						

Maximum Allowable Ripple Current (mA rms) at 105°C 100kHz

Maximum Impedance (Q) at 20°C 100kHz

Case Size $\phi D \times L(mm)$

Voltag	Voltage (Code) 25V (1E)		35V (1V)					
Cap.(µF)	Code	Case Size	Impedance	Ripple Current	Case Size	Impedance	Ripple Current	
1	105				4x5	5.0	50	
1.5	155				4x5	5.0	50	
2.2	225				4x5	5.0	50	
3.3	335				4x5	5.0	50	
4.7	475	4 x 5	5.0	50	4x5	5.0	50	
6.8	685	4 x 5	5.0	80	5 x 5	2.6	80	
10	106	5 x 5	2.6	80	5x5	2.6	80	
15	156	6.3 x 5	1.3	115	6.3 x 5	1.3	115	
22	226	6.3 x 5	1.3	115	6.3 x 5	1.3	115	
33	336	6.3 x 5	1.3	115				

Maximum Allowable Ripple Current (mA rms) at 105°C 100kHz

Maximum Impedance (Ω) at 20°C 100kHz

Case Size $\phi D \times L(mm)$

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminium Electrolytic Capacitors - Radial Leaded category:

Click to view products by Chengxing manufacturer:

Other Similar products are found below :

NRELS102M35V16X16C.140LLF ESRG160ETC100MD07D 227RZS050M 335CKR250M 476CKH100MSA 477CKR100M 107CKR010M 107CKH063MSA RJH-25V222MI9# RJH-35V221MG5# B43827A1106M8 RJH-50V221MH6# EKYA500ELL470MF11D B41022A5686M6 ESRG250ELL101MH09D EKMA160EC3101MF07D RJB-10V471MG3# ESMG160ETD221MF11D EKZH160ETD152MJ20S RJH-35V122MJ6# EGXF630ELL621ML20S RBD-25V100KE3#N EKMA350ELL100ME07D ESMG160ETD101ME11D ELXY100ETD102MJ20S EGXF500ELL561ML15S EKMG350ETD471MJ16S 35YXA330MEFC10X12.5 RXW471M1ESA-0815 ELXZ630ELL221MJ25S ERR1HM1R0D110T LPE681M30060FVA LPL471M22030FVA HFE221M25030FVA LKMD1401H221MF B41888G6108M000 EKMA160ETD470MF07D UHW1J102MHD6 EKMG500ETD221MJC5S LKMK2502W101MF LKMD1401H181MF LKMI2502G820MF LKMJ2001J122MF LKML2501C472MF LKMJ4002C681MF 450MXH330MEFCSN25X45 450MXK330MA2RFC22X50 63ZLH560MEFCG412.5X30 ELH2DM331025KT ELH2DM471P30KT