

Cautions and Warnings

Please be noted that this spec is only for reference if you have projects designed with the product number listed in. If you are looking for new project design-in, please find BSCQ Series specification/datasheet on Chilisin website. Or you may find our sales contact for more information on old part number at your convenience. Appreciated your attention and understanding.

Note: Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before ordering.

CHQ Series



CHQ Series supports miniaturized devices. Its low inductance, high precision and high Q enables easy impedance matching at both RF and IF circuits and compact high frequency circuit designing.


Features

- Excellent high frequency application
- High Q factor and SRF value
- Miniaturization
- Tight tolerance
- Wide inductance range


Applications

- RF matching circuit requiring Q value
- Bluetooth, WLAN, UWB, digital TV tuners and high-frequency circuit and module

Product Identification

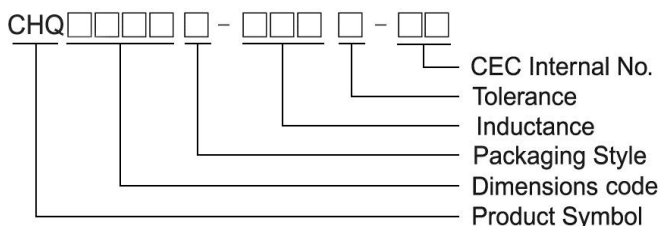


Shape and Dimensions

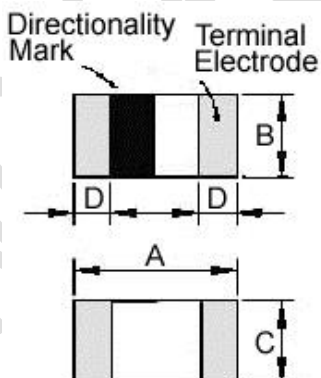

Dimensions in mm

| TYPE | A | B | C | D |
|---------|----------|----------|----------|-----------|
| CHQ0603 | 0.6±0.03 | 0.3±0.03 | 0.3±0.03 | 0.15±0.05 |
| CHQ1005 | 1.0±0.10 | 0.5±0.10 | 0.5±0.10 | 0.25±0.10 |

Recommended Pattern

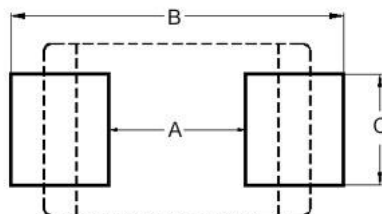

Dimensions in mm

| TYPE | A | B | C |
|---------|-----|-------------|-----|
| CHQ0603 | 0.3 | 0.75 ~ 1.05 | 0.3 |
| CHQ1005 | 0.4 | 1.2 ~ 1.4 | 0.5 |

SMD Ceramic Multilayer Chip Inductors – CHQ Series

Electrical Characteristics

| Part Number | Inductance (nH) | Tolerance (±%) | Q Min | Test Frequency (MHz) | Q Typical | | | | | SRF (MHz) Min | RDC (Ω) Max | IDC (mA) Max |
|------------------|--------------------|----------------------|----------|----------------------------|------------|------------|------------|------------|------------|---------------------|----------------|-----------------|
| | | | | | 500 MHz | 800 MHz | 1.8 GHz | 2.0 GHz | 2.4 GHz | | | |
| CHQ0603T-0N6□-HU | 0.6 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | >35 | >47 | >75 | >80 | >88 | 10000 | 0.06 | 900 |
| CHQ0603T-0N7□-HU | 0.7 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | >35 | >47 | >75 | >80 | >88 | 10000 | 0.06 | 900 |
| CHQ0603T-0N8□-HU | 0.8 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | >35 | >47 | >75 | >80 | >88 | 10000 | 0.06 | 900 |
| CHQ0603T-0N9□-HU | 0.9 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | >35 | >47 | >75 | >80 | >88 | 10000 | 0.06 | 900 |
| CHQ0603T-1N0□-HU | 1.0 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | >35 | >47 | >75 | >80 | >88 | 10000 | 0.07 | 850 |
| CHQ0603T-1N1□-HU | 1.1 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | >35 | >47 | >75 | >80 | >88 | 10000 | 0.07 | 850 |
| CHQ0603T-1N2□-HU | 1.2 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | 35 | 47 | 75 | 80 | 88 | 10000 | 0.08 | 800 |
| CHQ0603T-1N3□-HU | 1.3 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | 32 | 43 | 70 | 74 | 82 | 10000 | 0.09 | 760 |
| CHQ0603T-1N4□-HU | 1.4 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | 29 | 39 | 63 | 67 | 75 | 10000 | 0.12 | 640 |
| CHQ0603T-1N5□-HU | 1.5 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | 27 | 36 | 59 | 62 | 69 | 10000 | 0.15 | 600 |
| CHQ0603T-1N6□-HU | 1.6 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | 25 | 33 | 54 | 57 | 63 | 10000 | 0.19 | 510 |
| CHQ0603T-1N7□-HU | 1.7 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | 25 | 32 | 52 | 54 | 61 | 10000 | 0.11 | 680 |
| CHQ0603T-1N8□-HU | 1.8 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | 25 | 32 | 51 | 53 | 59 | 10000 | 0.12 | 640 |
| CHQ0603T-1N9□-HU | 1.9 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | 24 | 31 | 50 | 53 | 58 | 10000 | 0.13 | 620 |
| CHQ0603T-2N0□-HU | 2.0 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | 24 | 31 | 50 | 53 | 58 | 10000 | 0.15 | 600 |
| CHQ0603T-2N1□-HU | 2.1 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | 24 | 31 | 50 | 53 | 58 | 10000 | 0.16 | 550 |
| CHQ0603T-2N2□-HU | 2.2 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | 24 | 31 | 50 | 53 | 58 | 10000 | 0.20 | 500 |
| CHQ0603T-2N3□-HU | 2.3 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | 24 | 31 | 49 | 52 | 58 | 10000 | 0.24 | 460 |
| CHQ0603T-2N4□-HU | 2.4 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | 22 | 28 | 45 | 48 | 53 | 10000 | 0.26 | 430 |
| CHQ0603T-2N5□-HU | 2.5 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | 22 | 29 | 46 | 49 | 54 | 10000 | 0.28 | 415 |
| CHQ0603T-2N6□-HU | 2.6 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | 21 | 27 | 44 | 46 | 51 | 10000 | 0.30 | 405 |
| CHQ0603T-2N7□-HU | 2.7 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | 20 | 26 | 41 | 43 | 48 | 10000 | 0.32 | 400 |
| CHQ0603T-2N8□-HU | 2.8 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | 20 | 26 | 41 | 43 | 47 | 9500 | 0.20 | 500 |
| CHQ0603T-2N9□-HU | 2.9 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | 20 | 26 | 41 | 43 | 47 | 9300 | 0.22 | 480 |
| CHQ0603T-3N0□-HU | 3.0 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | 20 | 26 | 41 | 43 | 47 | 9100 | 0.24 | 460 |
| CHQ0603T-3N1□-HU | 3.1 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | 20 | 26 | 41 | 43 | 47 | 8900 | 0.25 | 450 |
| CHQ0603T-3N2□-HU | 3.2 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | 20 | 26 | 40 | 43 | 47 | 8700 | 0.28 | 415 |
| CHQ0603T-3N3□-HU | 3.3 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | 20 | 26 | 40 | 43 | 47 | 8600 | 0.28 | 415 |
| CHQ0603T-3N4□-HU | 3.4 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | 20 | 25 | 40 | 43 | 47 | 8400 | 0.29 | 410 |
| CHQ0603T-3N5□-HU | 3.5 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | 20 | 25 | 40 | 42 | 46 | 8200 | 0.30 | 405 |
| CHQ0603T-3N6□-HU | 3.6 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | 19 | 25 | 40 | 42 | 46 | 8100 | 0.32 | 400 |
| CHQ0603T-3N7□-HU | 3.7 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | 19 | 25 | 40 | 42 | 46 | 8000 | 0.36 | 370 |
| CHQ0603T-3N8□-HU | 3.8 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | 19 | 25 | 39 | 41 | 45 | 7800 | 0.40 | 355 |
| CHQ0603T-3N9□-HU | 3.9 | ±0.1nH/±0.2nH/±0.3nH | 14 | 500 | 19 | 25 | 39 | 41 | 45 | 7700 | 0.41 | 350 |
| CHQ0603T-4N3□-HU | 4.3 | ±0.2nH/±0.3nH | 14 | 500 | 18 | 24 | 37 | 39 | 43 | 6500 | 0.48 | 320 |
| CHQ0603T-4N7□-HU | 4.7 | ±0.2nH/±0.3nH | 14 | 500 | 19 | 24 | 37 | 39 | 42 | 6400 | 0.42 | 350 |
| CHQ0603T-5N1□-HU | 5.1 | ±0.2nH/±0.3nH | 14 | 500 | 19 | 24 | 37 | 39 | 42 | 6100 | 0.45 | 330 |
| CHQ0603T-5N6□-HU | 5.6 | ±0.2nH/±0.3nH | 14 | 500 | 18 | 24 | 36 | 37 | 41 | 5500 | 0.47 | 325 |
| CHQ0603T-6N2□-HU | 6.2 | ±0.2nH/±0.3nH | 14 | 500 | 18 | 23 | 35 | 36 | 39 | 5100 | 0.52 | 305 |
| CHQ0603T-6N8□-HU | 6.8 | 3 / 5 | 14 | 500 | 18 | 23 | 35 | 36 | 39 | 4800 | 0.55 | 305 |
| CHQ0603T-7N5□-HU | 7.5 | 3 / 5 | 14 | 500 | 18 | 23 | 34 | 35 | 38 | 4600 | 0.55 | 305 |
| CHQ0603T-8N2□-HU | 8.2 | 3 / 5 | 14 | 500 | 17 | 22 | 33 | 34 | 36 | 4300 | 0.57 | 290 |
| CHQ0603T-9N1□-HU | 9.1 | 3 / 5 | 14 | 500 | 17 | 22 | 33 | 34 | 36 | 4000 | 0.65 | 270 |
| CHQ0603T-10N□-HU | 10 | 3 / 5 | 14 | 500 | 17 | 22 | 33 | 34 | 36 | 3800 | 0.85 | 230 |
| CHQ0603T-12N□-HU | 12 | 3 / 5 | 14 | 500 | 17 | 22 | 31 | 32 | 33 | 3300 | 0.85 | 230 |
| CHQ0603T-15N□-HU | 15 | 3 / 5 | 14 | 500 | 17 | 21 | 28 | 29 | 29 | 2600 | 0.89 | 220 |
| CHQ0603T-18N□-HU | 18 | 3 / 5 | 14 | 500 | 16 | 21 | 26 | 26 | 25 | 2300 | 1.05 | 205 |
| CHQ0603T-22N□-HU | 22 | 3 / 5 | 14 | 500 | 16 | 21 | 26 | 26 | 24 | 1900 | 1.29 | 190 |

Note: When ordering, please specify tolerance code. Tolerance : B=±0.1nH , C=±0.2nH , S=±0.3nH , H=±3% , J=±5%

- Operating temperature range - 55°C ~ 125°C(Including self - temperature rise)
- IDC : Applied the current to coils, the inductance shall be less than 10% initial value
- Residual impedance of short chip : 0.48nH
- Measure Equipment :
















L & Q : Agilent E4991A+Agilent 16197A

SRF : Agilent E4991A or HP19196C

RDC : HP4338B or CHEN HWA 502

SMD Ceramic Multilayer Chip Inductors – CHQ Series
















Test Instruments : Agilent E4991A Material/Impedance Analyzer

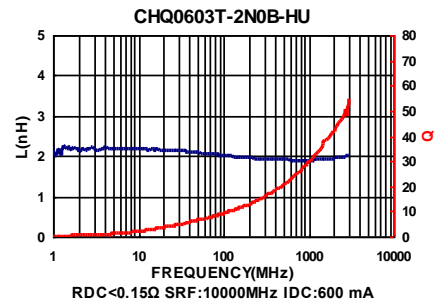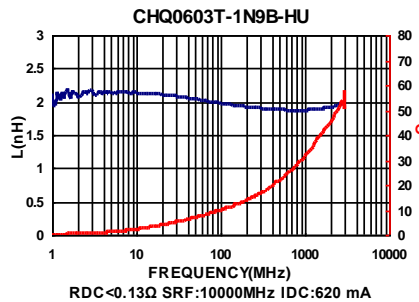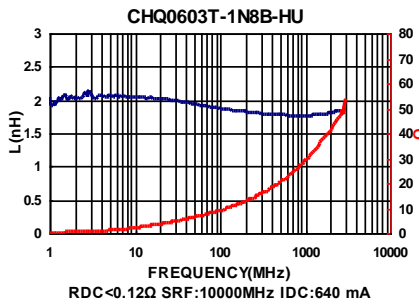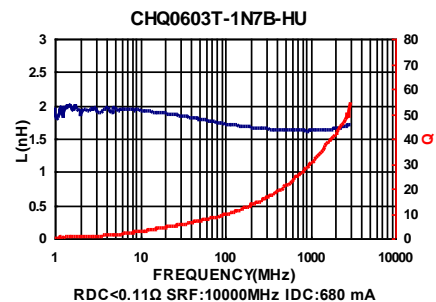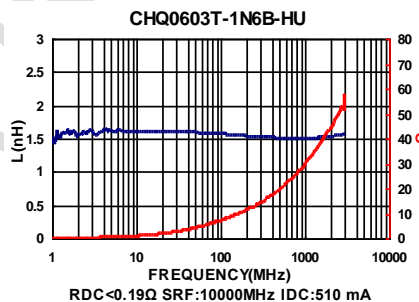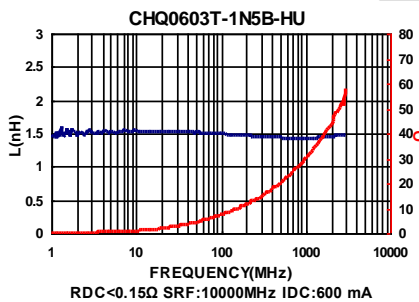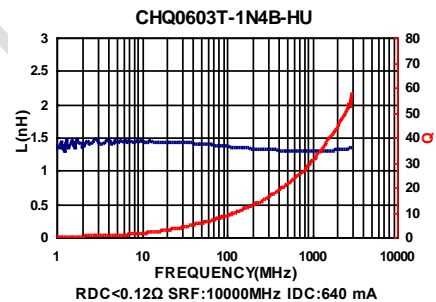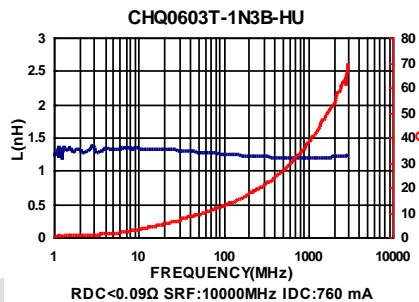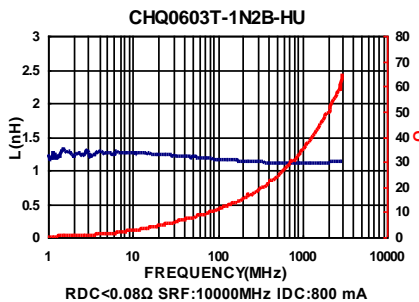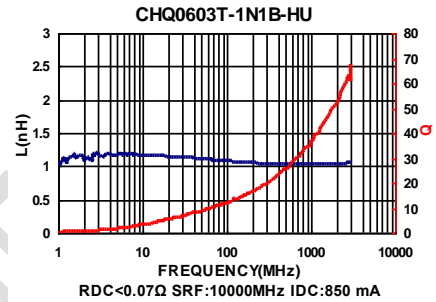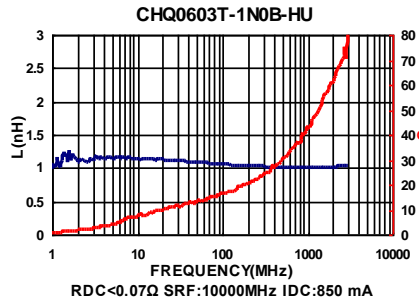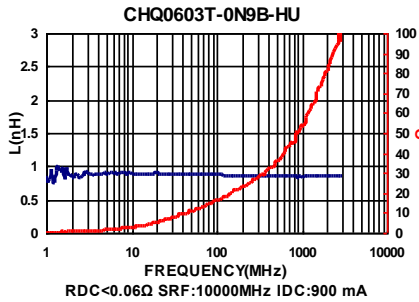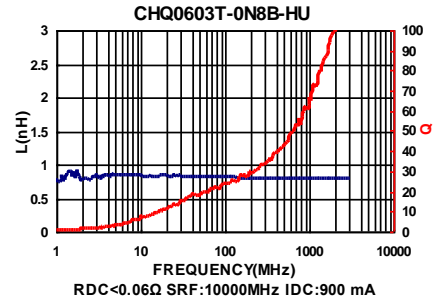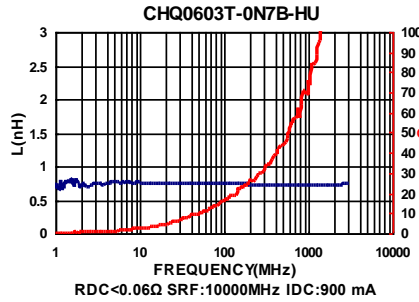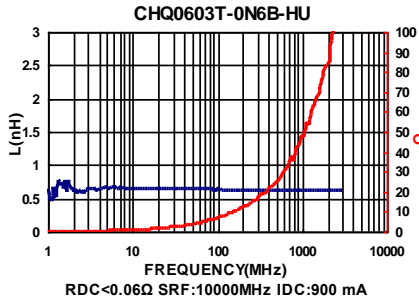

Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before ordering.

SMD Ceramic Multilayer Chip Inductors – CHQ Series


Test Instruments : Agilent E4991A Material/Impedance Analyzer

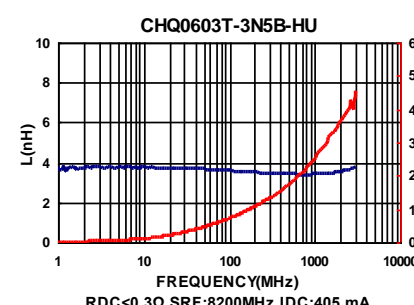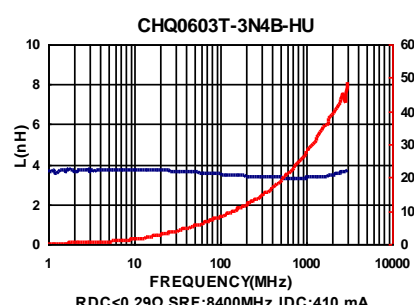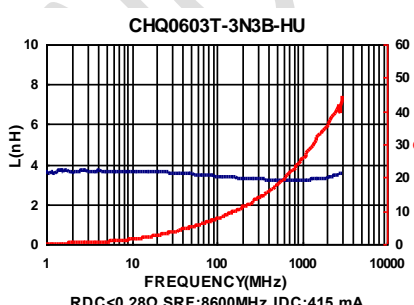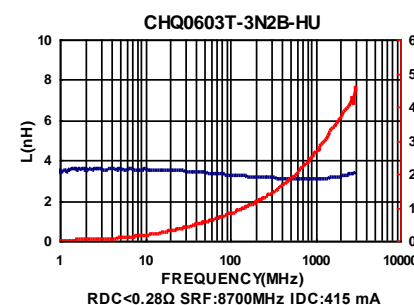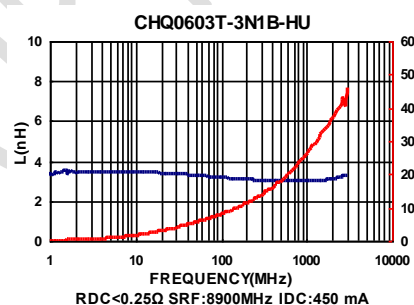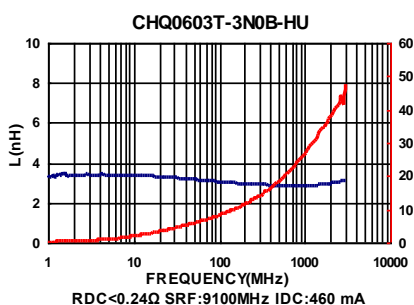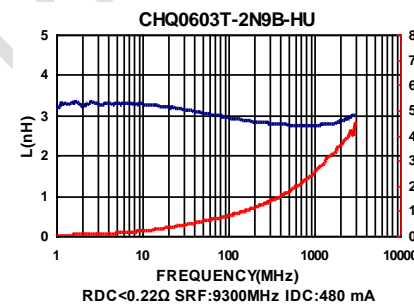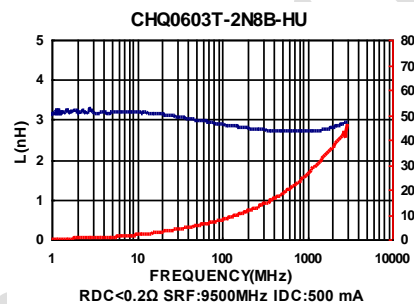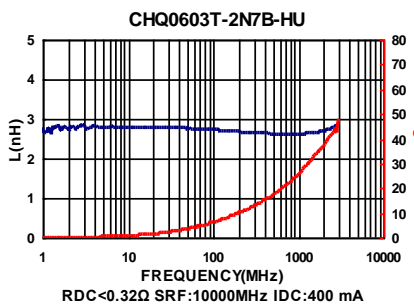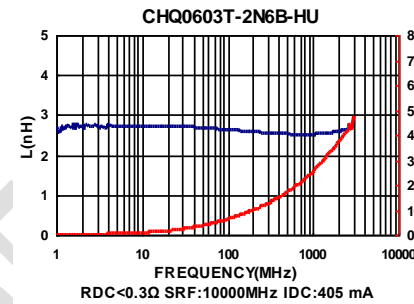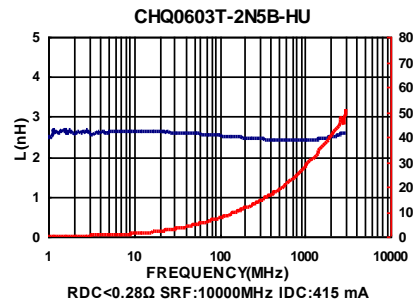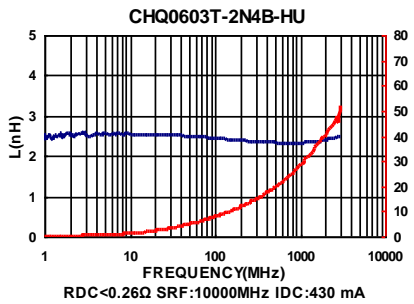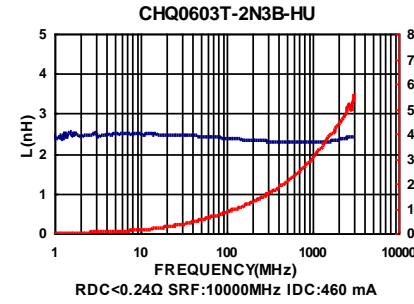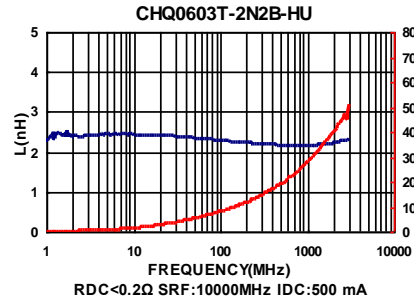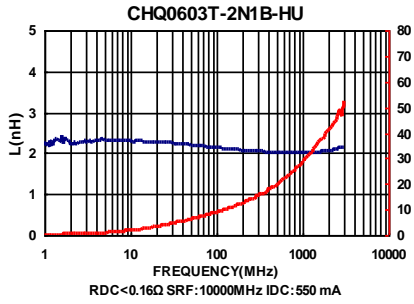

Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before ordering.




SMD Ceramic Multilayer Chip Inductors – CHQ Series

Test Instruments : Agilent E4991A Material/Impedance Analyzer

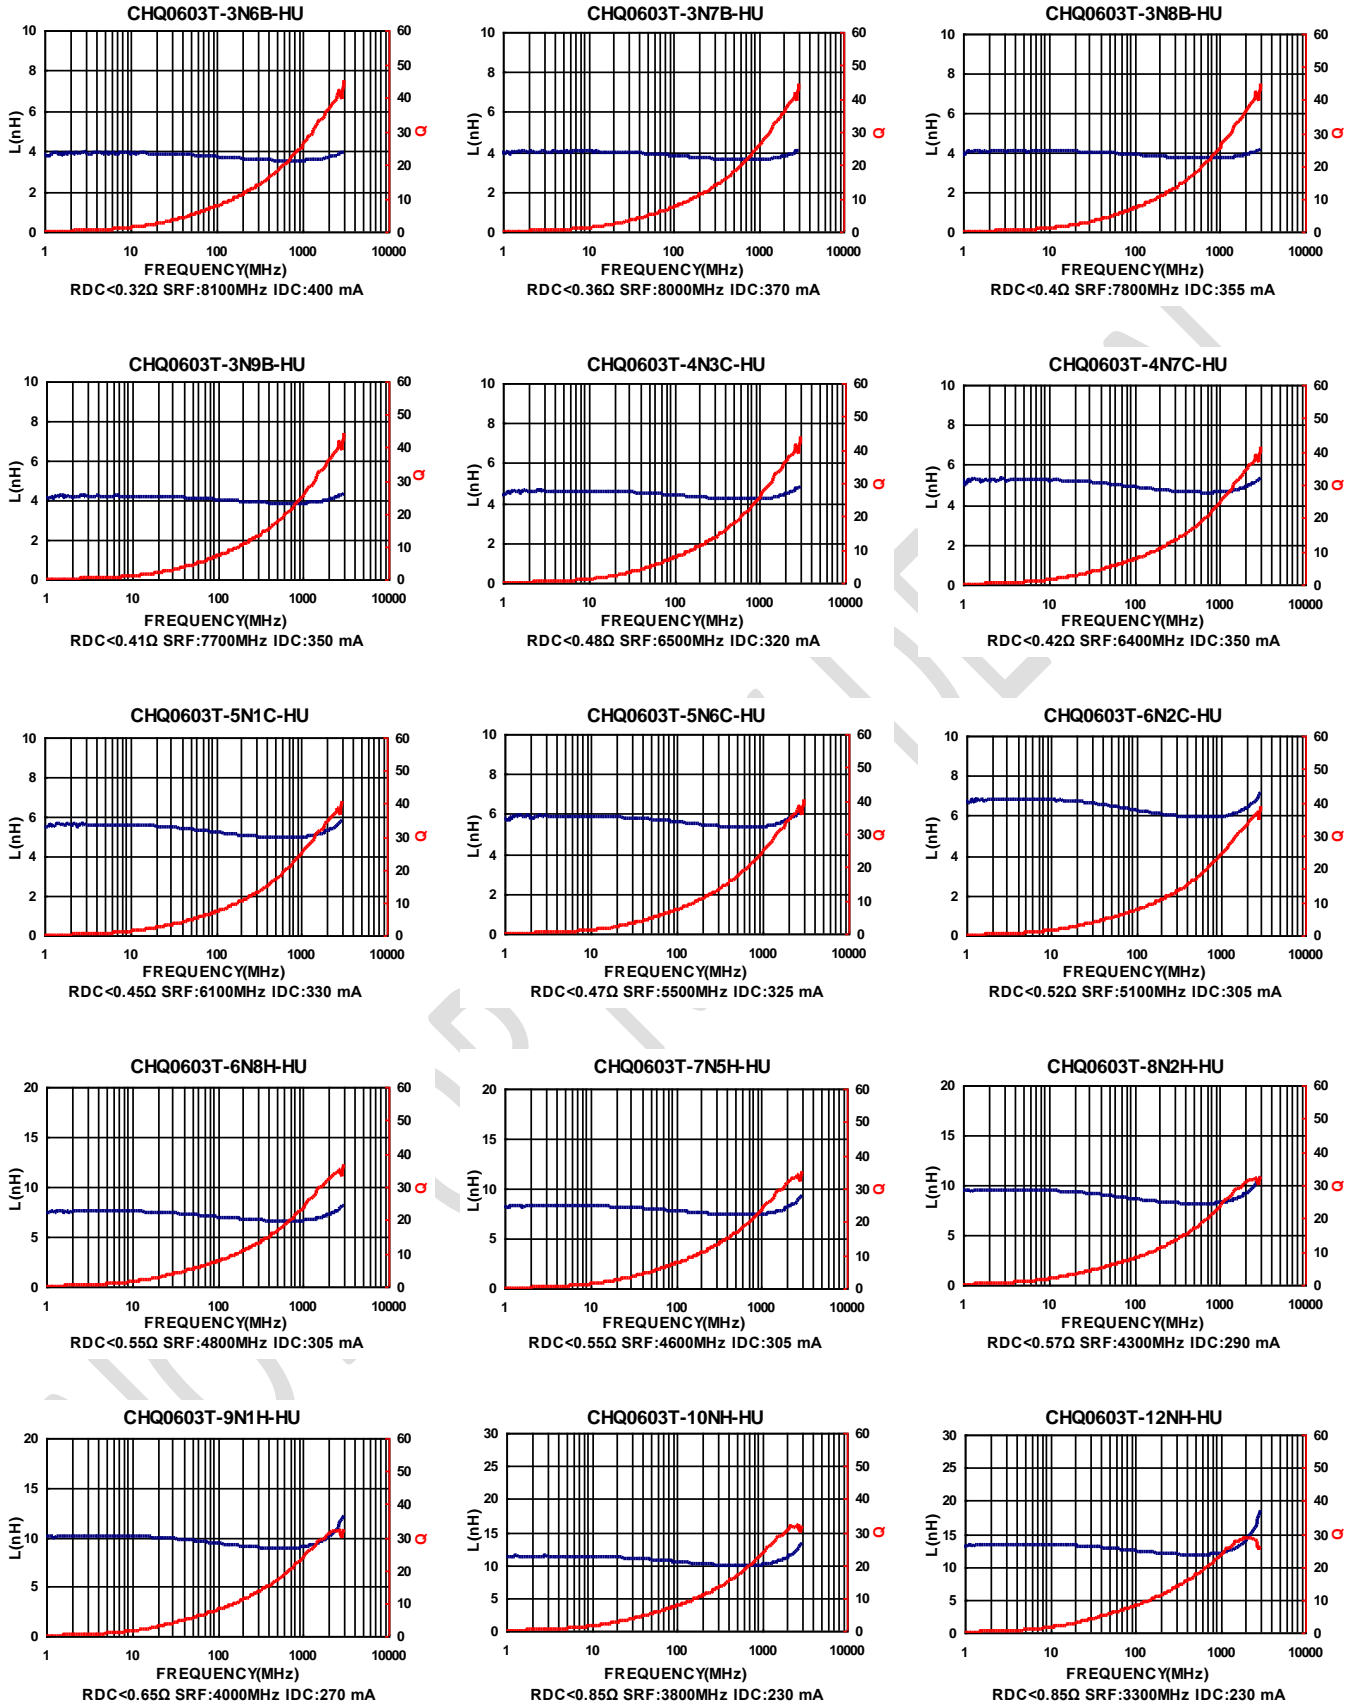

Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before ordering.

Test Instruments : Agilent E4991A Material/Impedance Analyzer

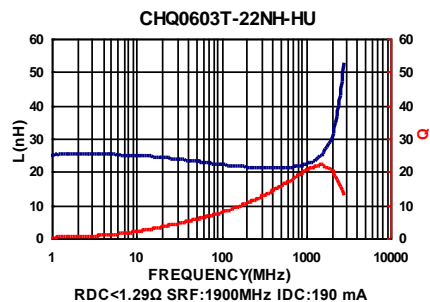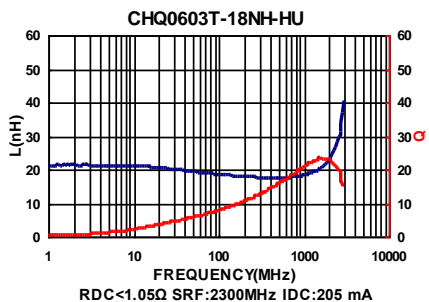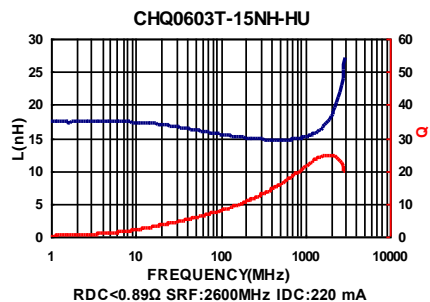

Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before ordering.

SMD Ceramic Multilayer Chip Inductors – CHQ Series

Electrical Characteristics

| Part Number | Inductance (nH) | Tolerance (±%) | Test Frequency (MHz) | Q | | SRF (MHz) Min | RDC (Ω) Max | IDC (mA) Max |
|--------------------|-----------------|----------------|----------------------|------------|------------|---------------|-------------|--------------|
| | | | | Min 100MHz | Typ 250MHz | | | |
| CHQ1005T-1N0□-S-NP | 1.0 | ±0.3nH | 100 | 8 | 23 | 10000 | 0.07 | 710 |
| CHQ1005T-1N2□-S-NP | 1.2 | ±0.3nH | 100 | 8 | 23 | 10000 | 0.07 | 710 |
| CHQ1005T-1N5□-S-NP | 1.5 | ±0.3nH | 100 | 8 | 20 | 8000 | 0.07 | 710 |
| CHQ1005T-1N8□-S-NP | 1.8 | ±0.3nH | 100 | 8 | 20 | 6000 | 0.07 | 710 |
| CHQ1005T-2N0□-S-NP | 2.0 | ±0.3nH | 100 | 8 | 20 | 6000 | 0.08 | 660 |
| CHQ1005T-2N2□-S-NP | 2.2 | ±0.3nH | 100 | 8 | 20 | 6000 | 0.08 | 660 |
| CHQ1005T-2N4□-S-NP | 2.4 | ±0.3nH | 100 | 8 | 18 | 6000 | 0.09 | 630 |
| CHQ1005T-2N7□-S-NP | 2.7 | ±0.3nH | 100 | 8 | 18 | 6000 | 0.09 | 630 |
| CHQ1005T-3N0□-S-NP | 3.0 | ±0.3nH | 100 | 8 | 18 | 6000 | 0.11 | 570 |
| CHQ1005T-3N3□-S-NP | 3.3 | ±0.3nH | 100 | 8 | 18 | 6000 | 0.12 | 540 |
| CHQ1005T-3N6□-S-NP | 3.6 | ±0.3nH | 100 | 8 | 18 | 5000 | 0.14 | 500 |
| CHQ1005T-3N9□-S-NP | 3.9 | ±0.3nH | 100 | 8 | 18 | 4000 | 0.15 | 490 |

Note: When ordering, please specify tolerance code. Tolerance : S=±0.3nH




- Operating temperature range - 55°C ~ 125°C(Including self - temperature rise)
- IDC : Applied the current to coils, the inductance shall be less than 10% initial value
- Residual impedance of short chip : 0.19nH(Inductance ≤ 4.3nH) or 0.48nH(Inductance > 4.3nH)
- Measure Equipment :
L & Q : Agilent E4991A+Agilent 16197A
SRF : Agilent E4991A or HP19196C
RDC : HP4338B or CHEN HWA 502

Test Instruments : Agilent E4991A Material/Impedance Analyzer



SMD Ceramic Multilayer Chip Inductors – CHQ Series

Test Instruments : Agilent E4991A Material/Impedance Analyzer

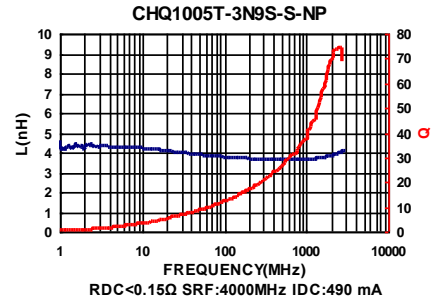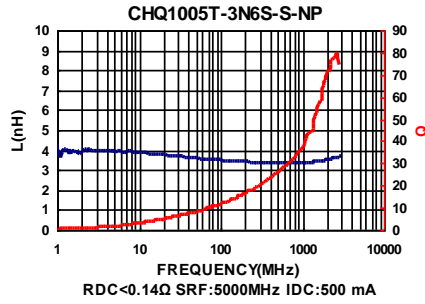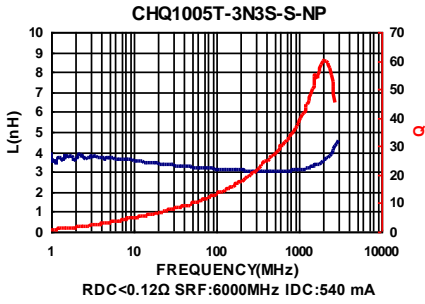

NOT FOR NEW DESIGN

Test Instruments : Agilent E4991A Material/Impedance Analyzer

NOT FOR NEW DESIGN


Test Instruments : Agilent E4991A Material/Impedance Analyzer

NOT FOR NEW DESIGN

Packaging Specifications

Tape Dimensions

Figure A

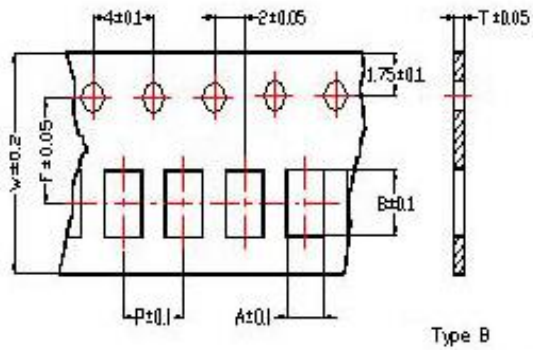

Tape Material


Figure A

Carrier Tape: Polycarbonate (Tape A)
Carrier Tape: Paper (Tape B)
Cover Tape: Polystyrene



Figure B

Carrier tape : Paper
Cover tape : Polyethylene

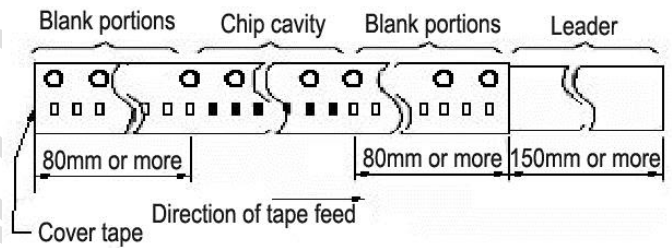

Dimensions in mm

| TYPE | Tape Dimensions | | | | | | | Tape Material | Reel Dimensions | | | | Quantity PCS / Reel |
|---------|-----------------|------|------|---|---|-----|---|---------------|-----------------|----|----|-----|---------------------|
| | A | B | T | W | P | F | A | | B | C | D | | |
| CHQ0603 | 0.37 | 0.67 | 0.42 | 8 | 2 | 3.5 | A | B | 180 | 60 | 13 | 1.5 | 15000 |
| CHQ1005 | 0.62 | 1.12 | 0.60 | 8 | 2 | 3.5 | A | A | 178 | 60 | 12 | 1.5 | 10000 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Chilisin](#) manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHQ1005P10NJ](#)
[MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC3-R50-R](#) [HC8-1R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#)
[ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#)