


## Multilayer Ferrite Chip Beads




Chilisin offers a wide range of multi-layered ferrite chip beads with various sizes, frequency characteristics, and impedance values for EMI solutions. These ferrite formulas are used to compose seven types of EMI suppression chip beads: SB, GB, PB, UPB, NB, HF, and VPB series.

### Product Identification

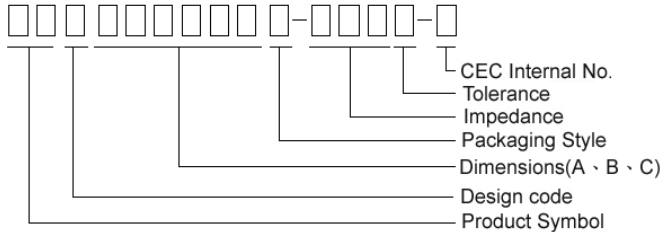


- Product symbol: SB, GB, PB, UPB, NB, HF, VPB
- Packaging: T : Tape and Reel ; B : Bulk
- Tolerance: Y = ± 25%; M = ± 20%; T:±30%
- Note: RoHS Compliant

### Shape and Dimensions



### Recommended Pattern

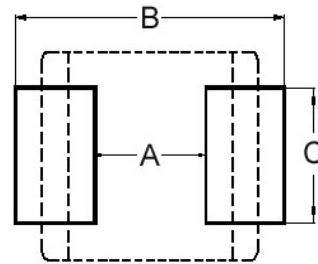

Dimensions in mm

| TYPE    | A        | B         | C        | D         |
|---------|----------|-----------|----------|-----------|
| ①060303 | 0.6±0.03 | 0.30±0.03 | 0.3±0.03 | 0.15±0.05 |
| ②100505 | 1.0±0.10 | 0.50±0.10 | 0.5±0.10 | 0.25±0.10 |
| ③160805 | 1.6±0.15 | 0.80±0.15 | 0.5±0.15 | 0.3±0.2   |
| ④160808 | 1.6±0.15 | 0.80±0.15 | 0.8±0.15 | 0.3±0.2   |
| ⑤201209 | 2.0±0.20 | 1.25±0.20 | 0.9±0.20 | 0.5±0.3   |
| ⑥321611 | 3.2±0.20 | 1.60±0.20 | 1.1±0.20 | 0.5±0.3   |

- ① : SBY / SBJ / NB / PB    ② : SBY / SBJ / NB / PB / UPB / HF  
 ③ : UPB    ④ : SBK / SBJ / GB / PB / NB / UPB / VPB  
 ⑤ : SBK / GB / PB / UPB    ⑥ : SBY / SBK / PB / UPB

Dimensions in mm

| TYPE    | A         | B           | C         |
|---------|-----------|-------------|-----------|
| ①060303 | 0.2 ~ 0.3 | 0.75 ~ 1.05 | 0.3       |
| ②100505 | 0.4       | 1.2 ~ 1.4   | 0.5       |
| ③160805 | 0.7 ~ 0.8 | 1.8 ~ 2.0   | 0.6 ~ 0.8 |
| ④160808 | 0.7 ~ 0.8 | 1.8 ~ 2.0   | 0.6 ~ 0.8 |
| ⑤201209 | 1.0 ~ 1.2 | 2.6 ~ 4.0   | 1.0 ~ 1.2 |
| ⑥321611 | 2.0       | 4.2 ~ 5.2   | 1.2       |

- \* Don't apply narrower pattern than listed above to PB and UPB. Narrow pattern might cause excessive heat or open circuit.

### Dimension Conversion

| Code   | Dimension in mm<br>(AxBxC) | EIA  |
|--------|----------------------------|------|
| 060303 | 0.6X0.3X0.3                | 0201 |
| 100505 | 1.0X0.5X0.5                | 0402 |
| 160805 | 1.6x0.8x0.5                | 0603 |
| 160808 | 1.6x0.8x0.8                | 0603 |
| 201209 | 2.0x1.2x0.9                | 0805 |
| 321611 | 3.2x1.6x1.1                | 1206 |


## Electrical Characteristics

| Part Number       | Impedance<br>( $\Omega \pm 25\%$ ) | Test Frequency<br>(MHz) | RDC<br>( $\Omega$ ) Max | Rated current<br>(mA) Max |
|-------------------|------------------------------------|-------------------------|-------------------------|---------------------------|
| PBY060303T-100Y-N | 10                                 | 100                     | 0.050                   | 1000                      |
| PBY060303T-220Y-N | 22                                 | 100                     | 0.065                   | 1000                      |
| PBY060303T-330Y-N | 33                                 | 100                     | 0.090                   | 750                       |
| PBY060303T-470Y-N | 47                                 | 100                     | 0.120                   | 500                       |
| PBY060303T-800Y-N | 80                                 | 100                     | 0.180                   | 500                       |
| PBY060303T-121Y-N | 120                                | 100                     | 0.230                   | 450                       |
| PBY060303T-241Y-N | 240                                | 100                     | 0.400                   | 350                       |
| PBY060303T-331Y-N | 330                                | 100                     | 0.500                   | 300                       |

**Note:** When ordering, please specify tolerance code. Tolerance : Y $\pm$ 25%

- Operating temperature range - 55°C ~ 125°C(Including self - temperature rise)
- Rate Current : Applied the current to coils, the temperature rise shall not be more than 30°C
- Measure Equipment :  
Z : HP4291A  
RDC : HP4338B or CHEN HWA 502

## Test Instruments : Agilent E4991A Impedance / Material Analyzer

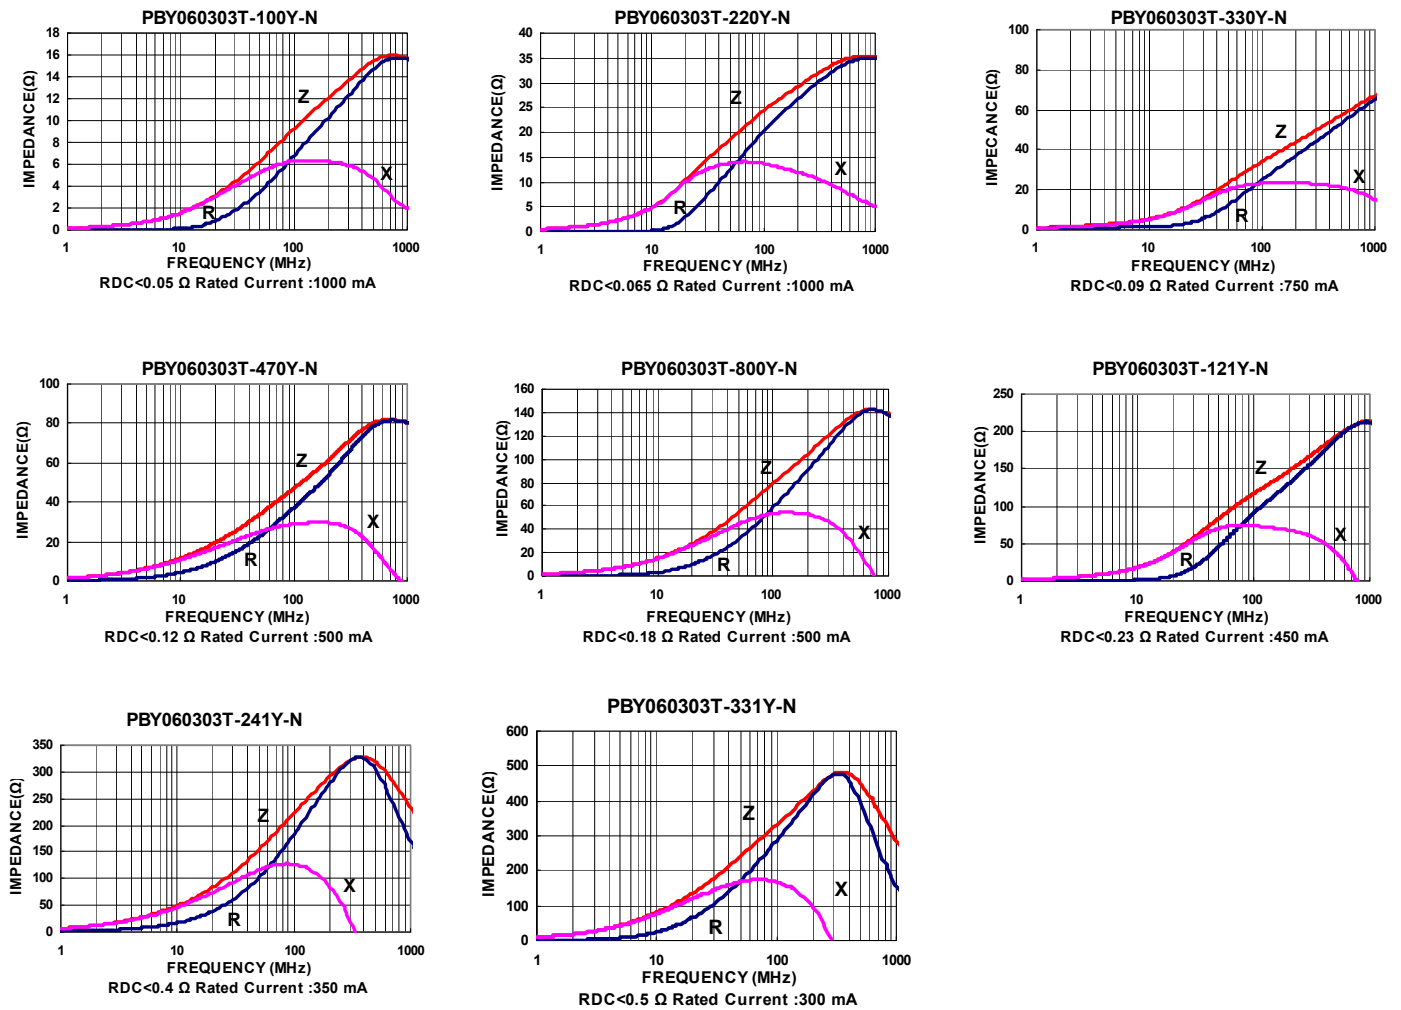

Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without advance notice. Please contact our sales department before ordering.







## Electrical Characteristics

| Part Number       | Impedance<br>( $\Omega \pm 25\%$ ) | Test Frequency<br>(MHz) | RDC<br>( $\Omega$ ) Max | Rated current<br>(mA) Max |
|-------------------|------------------------------------|-------------------------|-------------------------|---------------------------|
| PBY100505T-100Y-N | 10                                 | 100                     | 0.03                    | 2000                      |
| PBY100505T-250Y-N | 25                                 | 100                     | 0.05                    | 1700                      |
| PBY100505T-300Y-N | 30                                 | 100                     | 0.05                    | 1700                      |
| PBY100505T-320Y-N | 32                                 | 100                     | 0.05                    | 1700                      |
| PBY100505T-400Y-N | 40                                 | 100                     | 0.075                   | 1500                      |
| PBY100505T-500Y-N | 50                                 | 100                     | 0.075                   | 1500                      |
| PBY100505T-600Y-N | 60                                 | 100                     | 0.075                   | 1500                      |
| PBY100505T-680Y-N | 68                                 | 100                     | 0.09                    | 1200                      |
| PBY100505T-700Y-N | 70                                 | 100                     | 0.09                    | 1200                      |
| PBY100505T-800Y-N | 80                                 | 100                     | 0.09                    | 1200                      |
| PBY100505T-101Y-N | 100                                | 100                     | 0.09                    | 1200                      |
| PBY100505T-121Y-N | 120                                | 100                     | 0.09                    | 1400                      |
| PBY100505T-151Y-N | 150                                | 100                     | 0.14                    | 1400                      |
| PBY100505T-181Y-N | 180                                | 100                     | 0.14                    | 900                       |
| PBY100505T-221Y-N | 220                                | 100                     | 0.18                    | 1100                      |
| PBY100505T-601Y-N | 600                                | 100                     | 0.34                    | 700                       |
| PBY100505T-102Y-N | 1000                               | 100                     | 0.49                    | 500                       |

**Note:** When ordering, please specify tolerance code. Tolerance : Y= $\pm 25\%$


- Operating temperature range - 55°C ~ 125°C(Including self - temperature rise)
- Rate Current : Applied the current to coils, the temperature rise shall not be more than 30°C
- Measure Equipment :  
Z : HP4291A  
RDC : HP4338B or CHEN HWA 502

## Test Instruments : Agilent E4991A Impedance / Material Analyzer

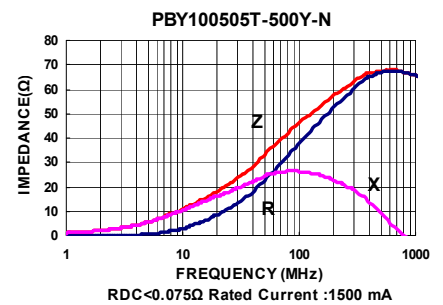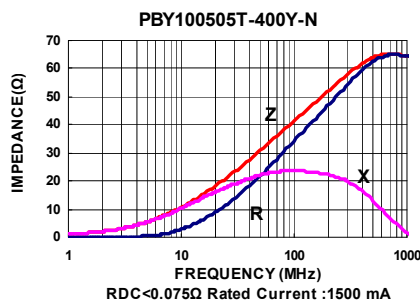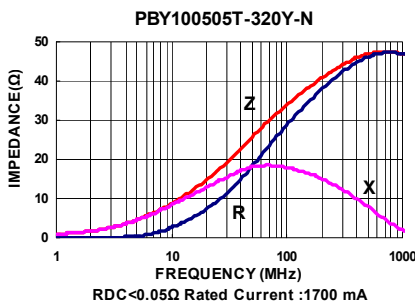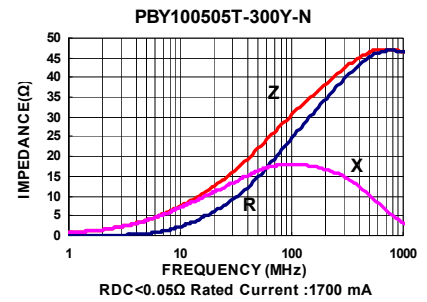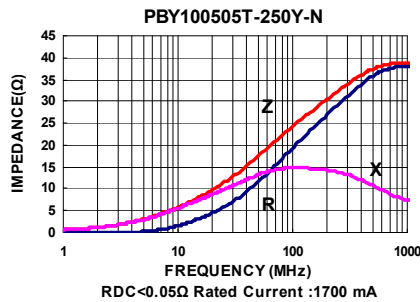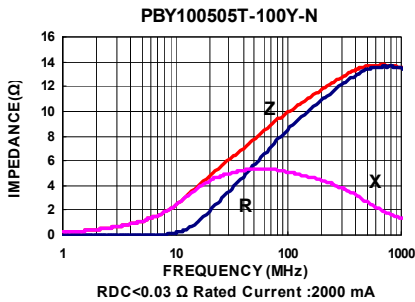

Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without advance notice. Please contact our sales department before ordering.

## Test Instruments : Agilent E4991A Impedance / Material Analyzer

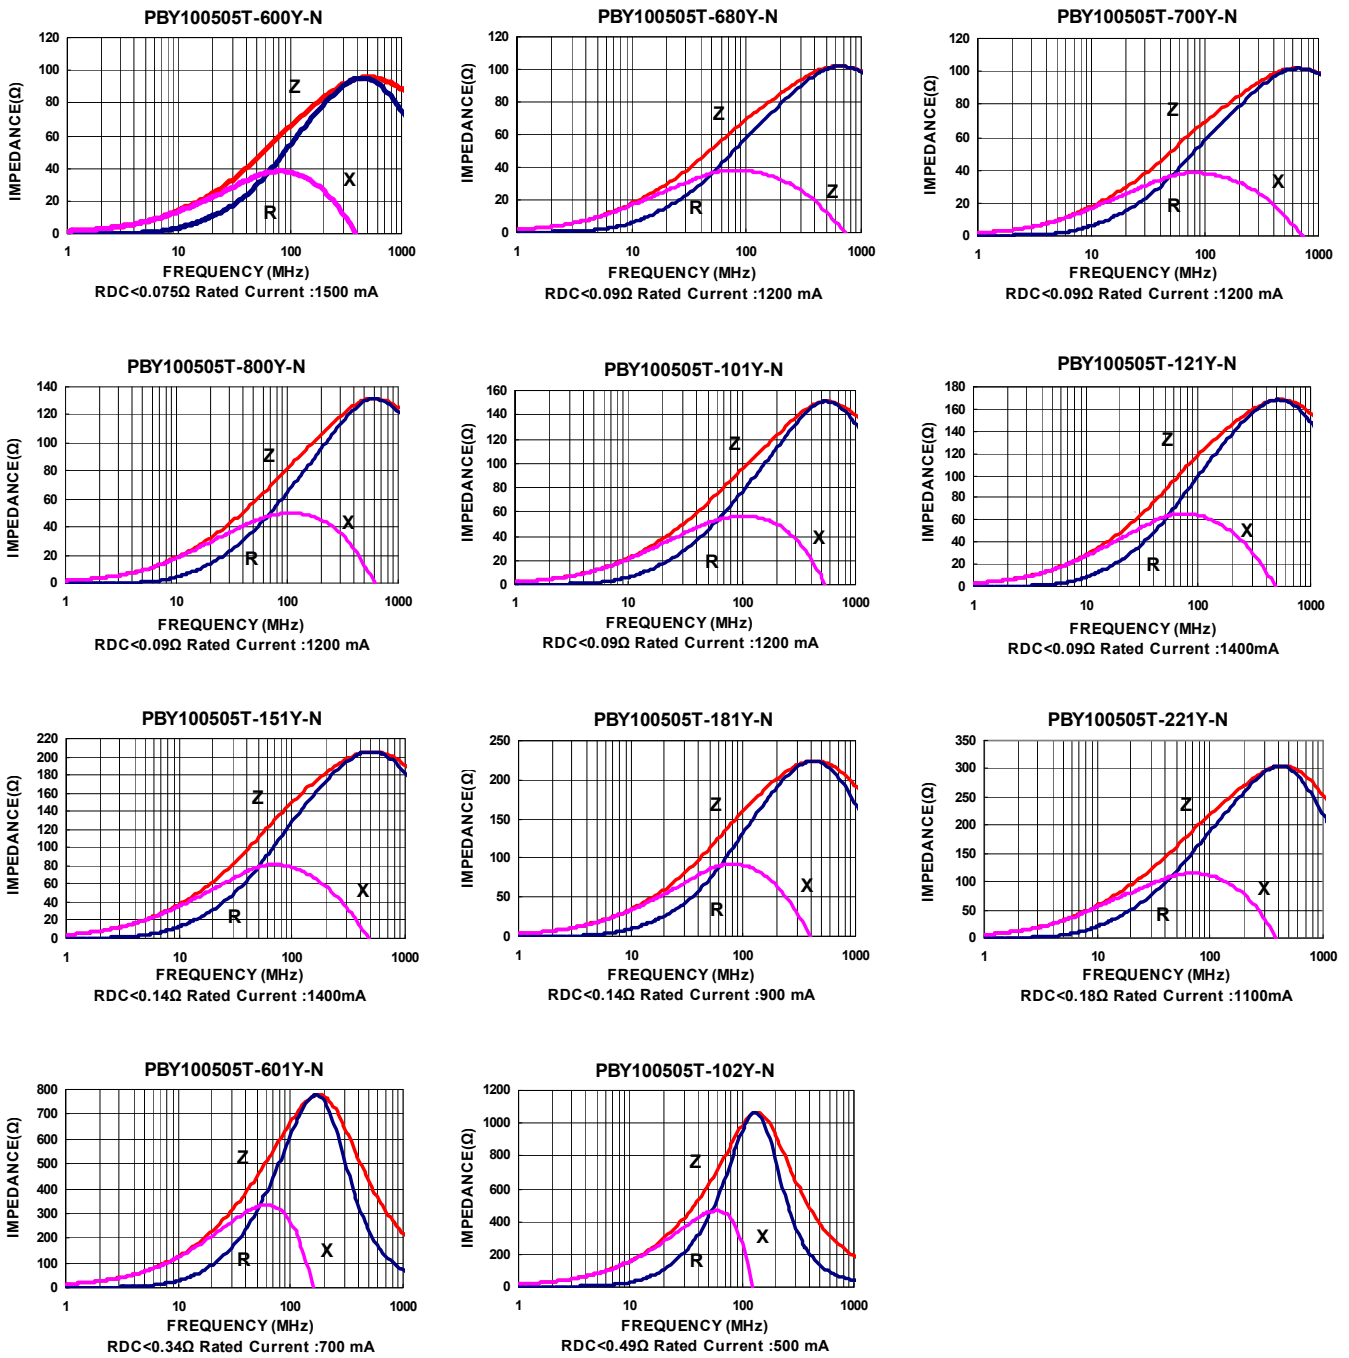

Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without advance notice. Please contact our sales department before ordering.







## Electrical Characteristics

| Part Number       | Impedance<br>( $\Omega \pm 25\%$ ) | Test Frequency<br>(MHz) | RDC<br>( $\Omega$ ) Max | Rated current<br>(mA) Max |
|-------------------|------------------------------------|-------------------------|-------------------------|---------------------------|
| PBY160808T-100Y-N | 10                                 | 100                     | 0.020                   | 4000                      |
| PBY160808T-110Y-N | 11                                 | 100                     | 0.020                   | 4000                      |
| PBY160808T-300Y-N | 30                                 | 100                     | 0.030                   | 3000                      |
| PBY160808T-330Y-N | 33                                 | 100                     | 0.035                   | 3000                      |
| PBY160808T-400Y-N | 40                                 | 100                     | 0.035                   | 3000                      |
| PBY160808T-600Y-N | 60                                 | 100                     | 0.040                   | 3000                      |
| PBY160808T-800Y-N | 80                                 | 100                     | 0.050                   | 2500                      |
| PBY160808T-101Y-N | 100                                | 100                     | 0.050                   | 2500                      |
| PBY160808T-121Y-N | 120                                | 100                     | 0.080                   | 2500                      |
| PBY160808T-151Y-N | 150                                | 100                     | 0.085                   | 2000                      |
| PBY160808T-181Y-N | 180                                | 100                     | 0.090                   | 2000                      |
| PBY160808T-221Y-N | 220                                | 100                     | 0.100                   | 2000                      |
| PBY160808T-301Y-N | 300                                | 100                     | 0.120                   | 1500                      |
| PBY160808T-331Y-N | 330                                | 100                     | 0.120                   | 1500                      |
| PBY160808T-471Y-N | 470                                | 100                     | 0.150                   | 1500                      |
| PBY160808T-601Y-N | 600                                | 100                     | 0.200                   | 1000                      |
| PBY160808T-102Y-N | 1000                               | 100                     | 0.250                   | 800                       |
| PBY160808T-122Y-N | 1200                               | 100                     | 0.250                   | 800                       |
| PBY160808T-152Y-N | 1500                               | 100                     | 0.400                   | 500                       |

**Note:** When ordering, please specify tolerance code. Tolerance : Y $\pm$ 25%














- Operating temperature range - 55°C ~ 125°C(Including self - temperature rise)
- Rate Current : Applied the current to coils, the temperature rise shall not be more than 30°C
- Measure Equipment :  
Z : HP4291A  
RDC : HP4338B or CHEN HWA 502

## Test Instruments : Agilent E4991A Impedance / Material Analyzer

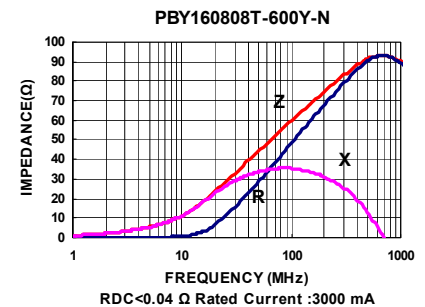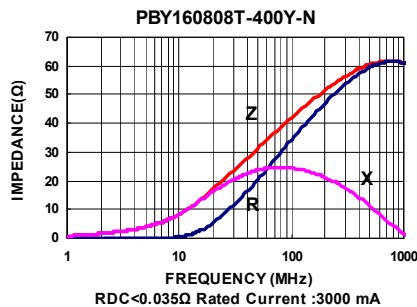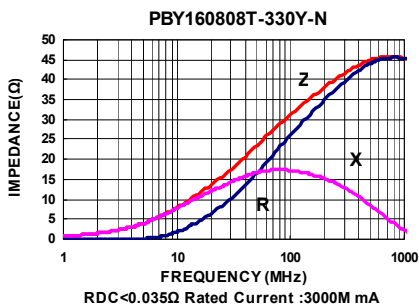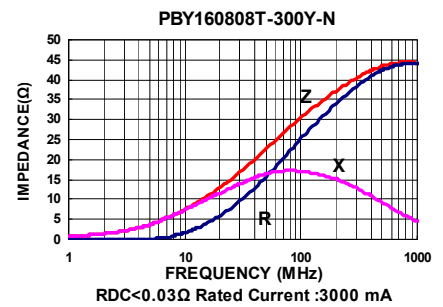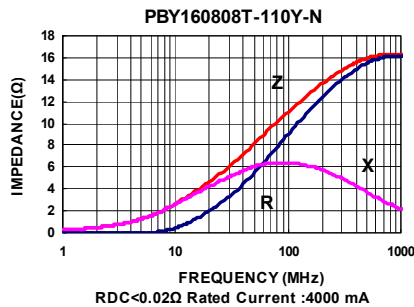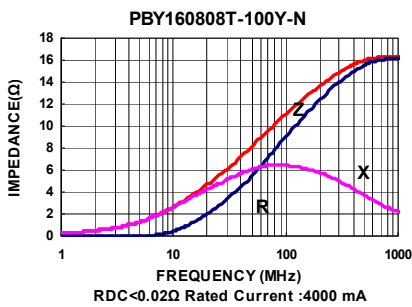

Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without advance notice. Please contact our sales department before ordering.

## Test Instruments : Agilent E4991A Impedance / Material Analyzer

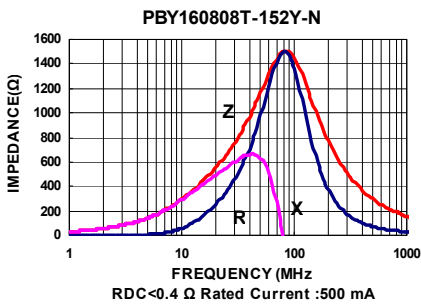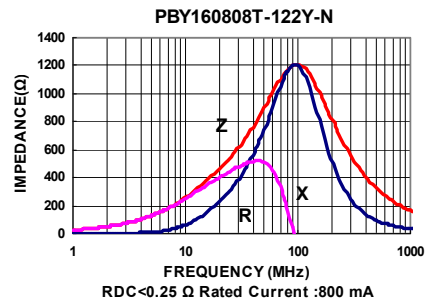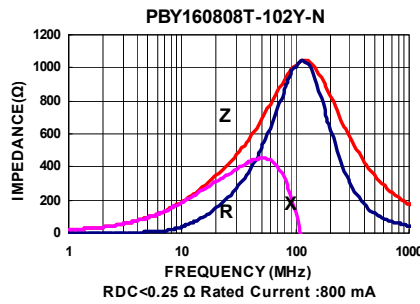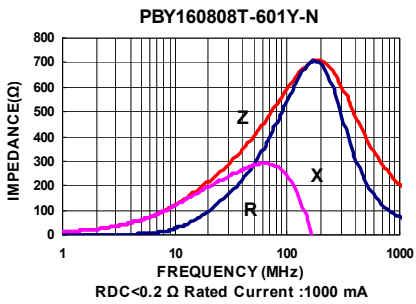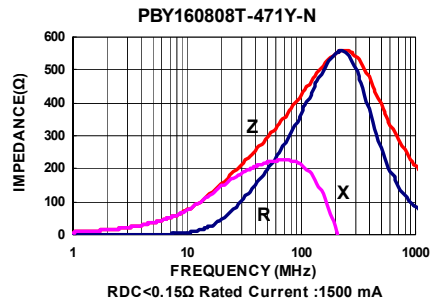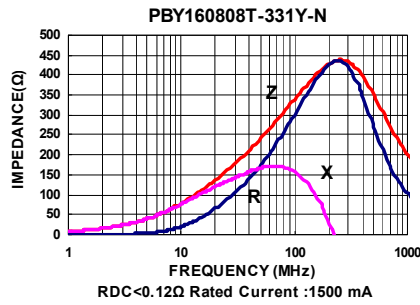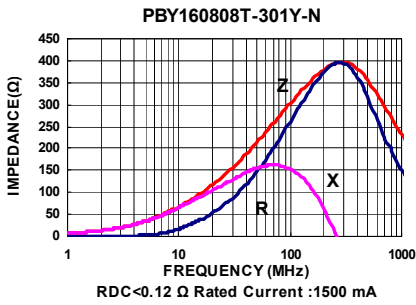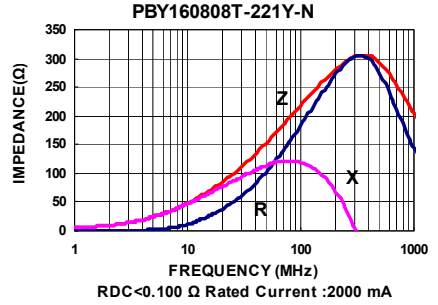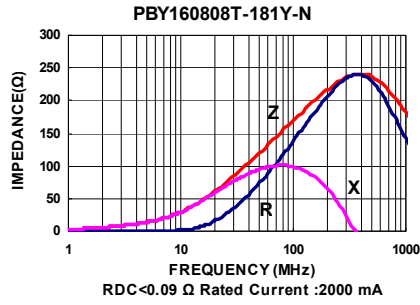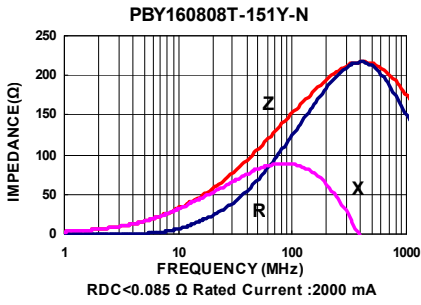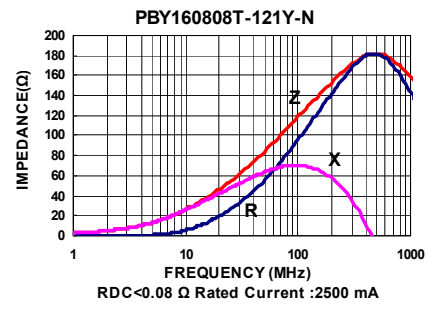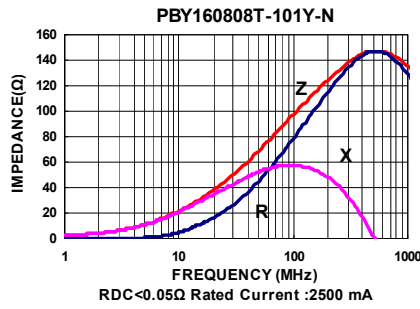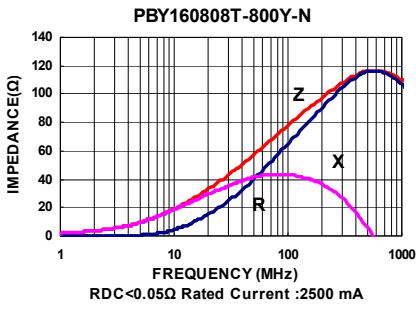

Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without advance notice. Please contact our sales department before ordering.







## Electrical Characteristics

| Part Number       | Impedance<br>( $\Omega \pm 25\%$ ) | Test Frequency<br>(MHz) | RDC<br>( $\Omega$ ) Max | Rated current<br>(mA) Max |
|-------------------|------------------------------------|-------------------------|-------------------------|---------------------------|
| PBY201209T-100Y-N | 10                                 | 100                     | 0.01                    | 6000                      |
| PBY201209T-110Y-N | 11                                 | 100                     | 0.01                    | 6000                      |
| PBY201209T-170Y-N | 17                                 | 100                     | 0.02                    | 5000                      |
| PBY201209T-300Y-N | 30                                 | 100                     | 0.015                   | 4000                      |
| PBY201209T-500Y-N | 50                                 | 100                     | 0.025                   | 3000                      |
| PBY201209T-600Y-N | 60                                 | 100                     | 0.03                    | 3000                      |
| PBY201209T-800Y-N | 80                                 | 100                     | 0.04                    | 3000                      |
| PBY201209T-101Y-N | 100                                | 100                     | 0.04                    | 3000                      |
| PBY201209T-121Y-N | 120                                | 100                     | 0.04                    | 3000                      |
| PBY201209T-221Y-N | 220                                | 100                     | 0.08                    | 2000                      |
| PBY201209T-301Y-N | 300                                | 100                     | 0.08                    | 2000                      |
| PBY201209T-331Y-N | 330                                | 100                     | 0.08                    | 2000                      |
| PBY201209T-471Y-N | 470                                | 100                     | 0.10                    | 2000                      |
| PBY201209T-601Y-N | 600                                | 100                     | 0.10                    | 2000                      |
| PBY201209T-102Y-N | 1000                               | 100                     | 0.12                    | 1500                      |
| PBY201209T-152Y-N | 1500                               | 100                     | 0.30                    | 1000                      |

**Note:** When ordering, please specify tolerance code. Tolerance : Y= $\pm 25\%$

- Operating temperature range - 55°C ~ 125°C(Including self - temperature rise)
- Rate Current : Applied the current to coils, the temperature rise shall not be more than 30°C
- Measure Equipment :  
Z : HP4291A  
RDC : HP4338B or CHEN HWA 502











## Test Instruments : Agilent E4991A Impedance / Material Analyzer

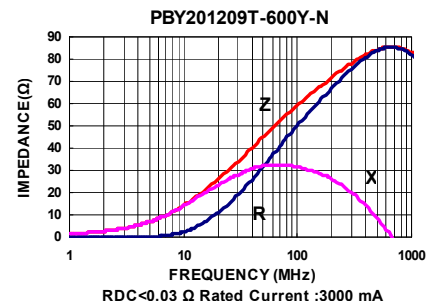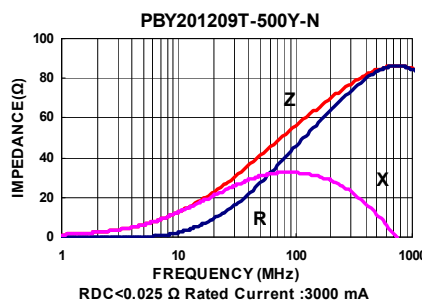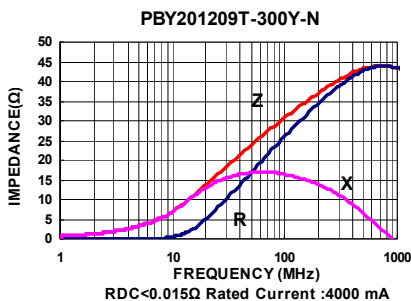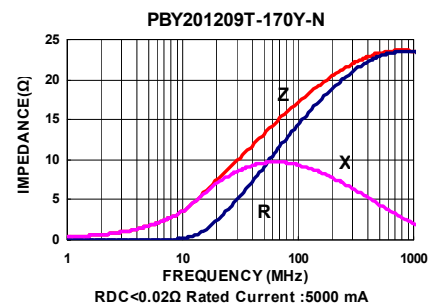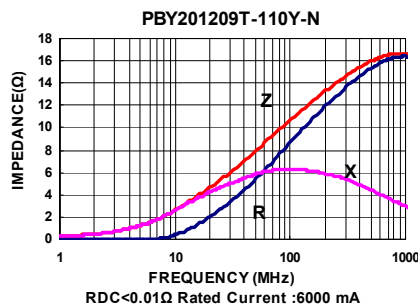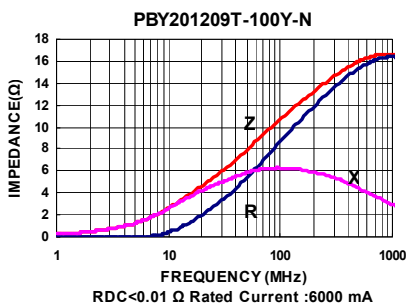

Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without advance notice. Please contact our sales department before ordering.

# SMD Multilayer Ferrite Chip Beads - PBY Series

Test Instruments : Agilent E4991A Impedance / Material Analyzer

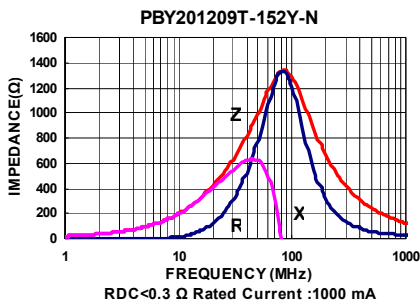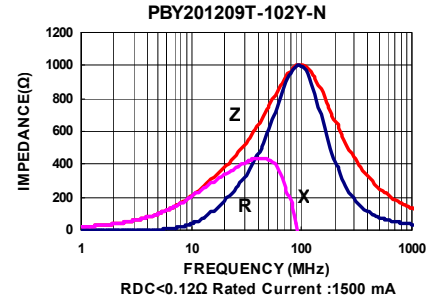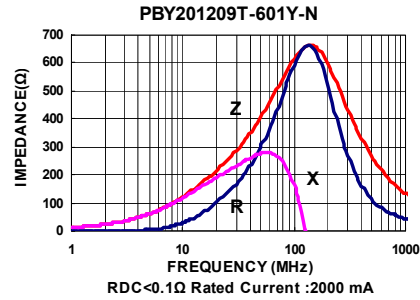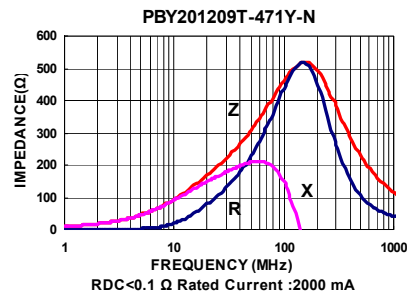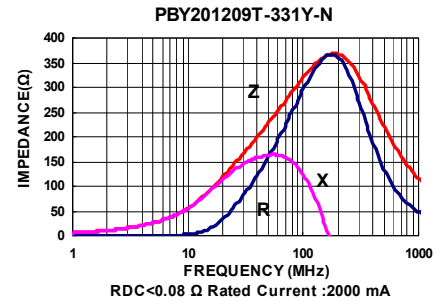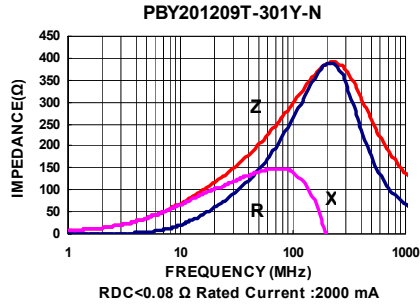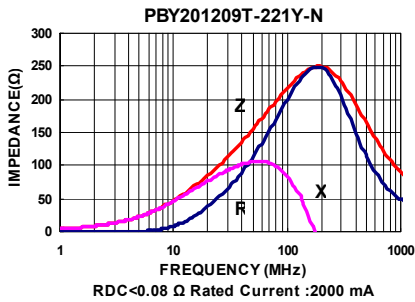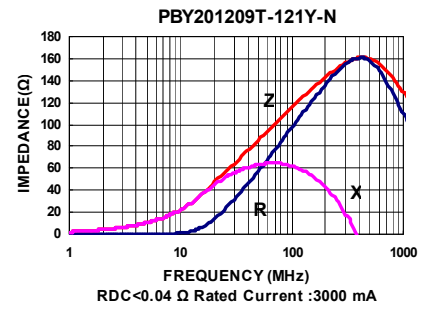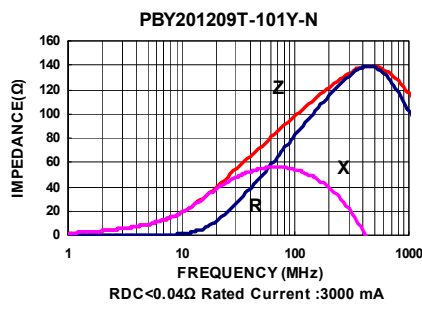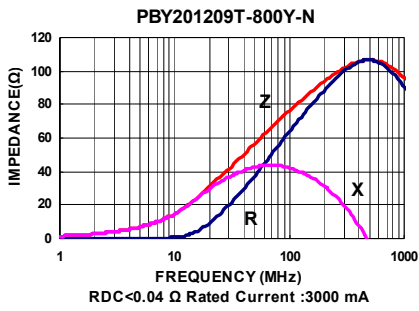

Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without advance notice. Please contact our sales department before ordering.




## Electrical Characteristics

| Part Number       | Impedance<br>( $\Omega \pm 25\%$ ) | Test Frequency<br>(MHz) | RDC<br>( $\Omega$ ) Max | Rated current<br>(mA) Max |
|-------------------|------------------------------------|-------------------------|-------------------------|---------------------------|
| PBY321611T-100Y-N | 10                                 | 100                     | 0.015                   | 6000                      |
| PBY321611T-300Y-N | 30                                 | 100                     | 0.015                   | 4000                      |
| PBY321611T-600Y-N | 60                                 | 100                     | 0.020                   | 4000                      |
| PBY321611T-101Y-N | 100                                | 100                     | 0.030                   | 3000                      |
| PBY321611T-121Y-N | 120                                | 100                     | 0.030                   | 3000                      |
| PBY321611T-221Y-N | 220                                | 100                     | 0.050                   | 2000                      |
| PBY321611T-301Y-N | 300                                | 100                     | 0.060                   | 2000                      |
| PBY321611T-601Y-N | 600                                | 100                     | 0.100                   | 2000                      |
| PBY321611T-102Y-N | 1000                               | 50                      | 0.150                   | 1200                      |
| PBY321611T-122Y-N | 1200                               | 50                      | 0.180                   | 1000                      |
| PBY321611T-152Y-N | 1500                               | 50                      | 0.200                   | 800                       |

**Note: When ordering, please specify tolerance code. Tolerance : Y=±25%**

- Operating temperature range - 55°C ~ 125°C(Including self - temperature rise)
- Rate Current : Applied the current to coils, the temperature rise shall not be more than 30°C
- Measure Equipment :  
Z : HP4291A  
RDC : HP4338B or CHEN HWA 502


**Test Instruments : Agilent E4991A Impedance / Material Analyzer**

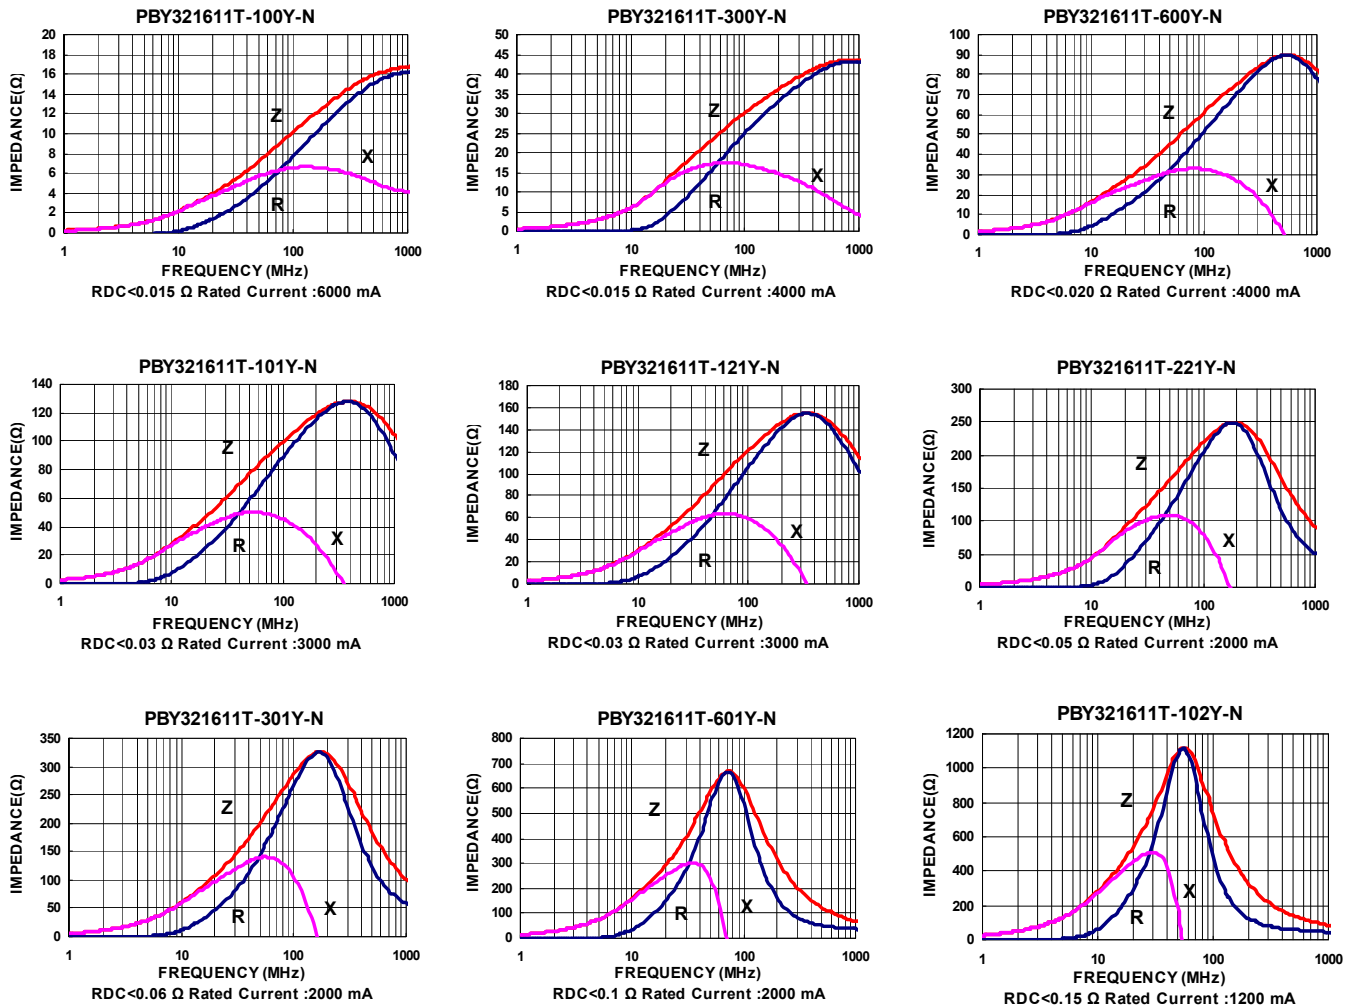


Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without advance notice. Please contact our sales department before ordering.

## Packaging Specifications


### Tape Dimensions

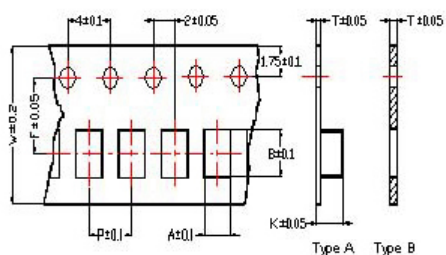

### Tape Material

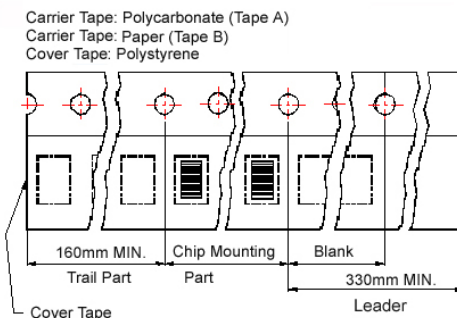

### Reel Dimensions

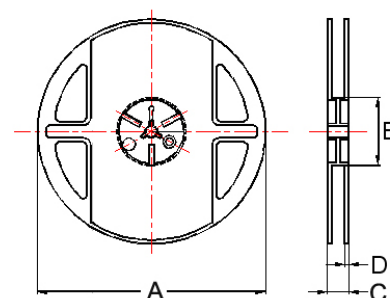

- ① : SBY / SBJ / NB / PB
- ② : SBY / SBJ / NB / PB / UPB / HF    ③ : UPB
- ④ : SBK / SBJ / GB / PB / NB / UPB / VPB
- ⑤ : SBK / GB / PB / UPB    ⑥ : SBY / SBK / PBY / UPB

## Dimensions in mm

| TYPE    | Tape Dimensions |      |      |     |     |     |      |      | Reel Dimensions |    |    |   | Quantity<br>PCS / REEL |
|---------|-----------------|------|------|-----|-----|-----|------|------|-----------------|----|----|---|------------------------|
|         | A               | B    | T    | W   | P   | F   | K    | Tape | A               | B  | C  | D |                        |
| ①060303 | 0.37            | 0.67 | 0.42 | 8.0 | 2.0 | 3.5 | -    | B    | 178             | 60 | 10 | 2 | 15000                  |
| ②100505 | 0.62            | 1.12 | 0.60 | 8.0 | 2.0 | 3.5 | -    | B    | 178             | 60 | 12 | 2 | 10000                  |
| ③160805 | 1.05            | 1.85 | 0.60 | 8.0 | 2.0 | 3.5 | -    | B    | 178             | 60 | 12 | 2 | 10000                  |
| ④160808 | 1.05            | 1.85 | 0.95 | 8.0 | 4.0 | 3.5 | -    | B    | 178             | 60 | 12 | 2 | 4000                   |
| ⑤201209 | 1.50            | 2.30 | 0.97 | 8.0 | 4.0 | 3.5 | -    | B    | 178             | 60 | 12 | 2 | 4000                   |
| ⑥321611 | 1.88            | 3.50 | 0.22 | 8.0 | 4.0 | 3.5 | 1.27 | A    | 178             | 60 | 12 | 2 | 3000                   |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Ferrite Beads](#) category:*

*Click to view products by [Chilisin](#) manufacturer:*

Other Similar products are found below :

[CZB1EGTTP700P](#) [CZB1JGTTD152P](#) [CZB1JGTTD601P](#) [CZB2AFTTD800P](#) [CZB2AGTTD121P](#) [CZB2AGTTD601P](#) [CZB2BFTTE600P](#)  
[PE-0402FB121ST](#) [NCB0603R301TR050F](#) [NCB0805A320TR050F](#) [NCB-H1206B680TR300F](#) [SMB2.5-1TR](#) [SMB2.5R-2](#) [CZB1EGTTP121P](#)  
[CZB1JGTTD102P](#) [CZB1JGTTD121P](#) [CZB1JGTTD221P](#) [CZB1JGTTD600P](#) [CZB2AGTTD301P](#) [CZB2BFTTE301P](#) [CZB2BFTTE601P](#)  
[4221R-1](#) [4221R-2](#) [432703041971](#) [EMI0805R-2000](#) [EMI0805R-600](#) [SBY100505T-100Y-N](#) [NCB-GH0402D121TR060F](#) [NCB-](#)  
[H1812D125TR150F](#) [CZB2AGTTD102P](#) [NCB0402P301TR005F](#) [NCB0603R152TR030F](#) [NCB0805A121TR050F](#) [NCB3312K900TR500F](#)  
[NCB-H0805A102TR150F](#) [NCB-H0805A221TR300F](#) [NCB-H1806E181TR300F](#) [NCB0402P300TR030F](#) [NCB0402P700TR050F](#)  
[NCB0805A102TR040F](#) [NCB1806E151TR020F](#) [NCB-H0603R121TR300F](#) [NCB-H0805A220TR600F](#) [NCB-H0805A390TR400F](#) [NCB-](#)  
[H1206B121TR300F](#) [NCB-H1206B601TR200F](#) [CIM21J252NE](#) [EMI0805R-220](#) [74279250](#) [7427924](#)