


Conductive Paint 30g Jar - Low Resistance

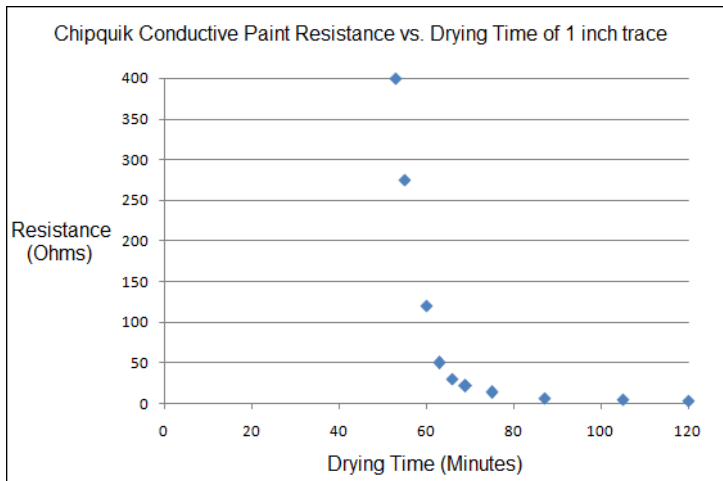

Product Highlights

Low Resistance

Dries at room temperature

RoHS 3 and REACH compliant

Specifications

Resistance: 1.0 Ohms/Square at 0.004" stencil thickness

Viscosity: 100 mPa·s

Packaging: 30g Jar

Shelf Life: >12 months

Drying Time: Allow 60-120 minutes for paint to dry before using circuit. Resistance will drop from a few Mega Ohms at 0 minutes to approximately 3 ohms per inch of trace after 120 minutes. If encapsulating or conformal coating on top of conductive paint, allow 7 days (168 hours) for full drying before covering is applied.

Operating Temperature: -40°C to 120°C (-40°F to 248°F)

Application

Apply by dot dispensing, line dispensing, stencil and squeegee, or with paint brush.

Cleaning

Clean using water or isopropyl alcohol (IPA).

Storage and Handling

Store at 3-25°C (37-77°F). Do not freeze.

Transportation

This product has no shipping restrictions. Shipping below 0°C (32°F) or above 25°C (77°F) for normal transit times by ground or air will not impact this product's stated shelf life.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Chemicals](#) category:

Click to view products by [Chip Quik](#) manufacturer:

Other Similar products are found below :

[DP-605NS](#) [3045-QT](#) [3125-9S](#) [3748-Q-58"x8"](#) [FO-25DT](#) [S1009-KIT-A-CS8606](#) [DP100-200ML](#) [1743-2FP](#) [152-KA-NC](#) [826-450G](#) [9729](#)
[9223](#) [9945](#) [7000000275](#) [1601](#) [8330-19G](#) [842AR-15ML](#) [841AR-150ML](#) [842AR-P](#) [843WB-15ML](#) [8462-85ML](#) [4354-1L](#) [838AR-P](#) [838AR-](#)
[15ML](#) [419D-P-BK](#) [419D-P-WH](#) [8MT-450](#) [8MT-25](#) [832HD-25ML](#) [832FX-450ML](#) [834ATH-375ML](#) [832HD-400ML](#) [8617-1P](#) [843AR-340G](#)
[843ER-800ML](#) [9310-300ML](#) [847-1P](#) [419D-55ML](#) [8800-375ML](#) [8810-375ML](#) [8820-2.55L](#) [419E-340G](#) [842UR-12ML](#) [419D-1L](#)
[CW3300WHITE](#) [CW2205](#) [10447](#) [9620-945ML](#) [4140A-945ML](#) [FW2170](#)