

## FP-2B-2

### MicroGripper - 1.25mm to 0.3mm Lead Pitch

#### FEATURES


- Used with SMT packages down to 0.3mm lead pitch
- Thin clip body width allows many lead grippers to be mounted side-by-side for simultaneous testing
- Maximum frequency is 100MHz



#### SPECIFICATIONS

Temperature Range:	0-70°C
Conductor Resistance:	(Short) 22 mOhms
Conductor Resistance:	(Long) 55 mOhms
Contact Resistance:	10 mOhms
Tines Diameter:	0.15mm
Body Height:	14mm
Body Material:	ABS
Voltage Usage:	+/- 40V
Rating:	500 WVDC
Bandwidth:	(3db) >100MHz
Inductance:	< 1mH @ 1KHz
Capacitance:	< 2.0pF @ 1KHz
Material:	Steel wire or stainless steel, nickel-plated

#### DIMENSIONS

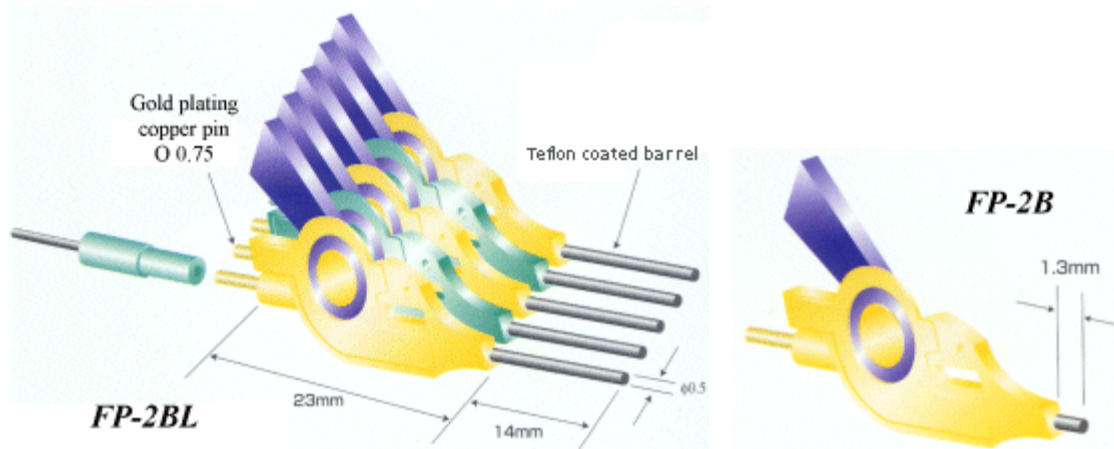

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Test Probes](#) category:*

*Click to view products by [Chip Quik](#) manufacturer:*

Other Similar products are found below :

[6214](#) [6474](#) [815003](#) [923832-BK-B](#) [P-KIT-1](#) [KT-MS001](#) [925250-R](#) [973368101](#) [972318101](#) [972318100](#) [MXHQ87WJ3000](#) [PK106-3](#) [PK2-5MM-102](#) [TAS90](#) [VL1735/45](#) [973368100](#) [972327100](#) [972327101](#) [973995100](#) [973995101](#) [CT3982B-120](#) [MO50-PINS](#) [CT4386](#) [PP023-1](#) [PK1-5MM-127](#) [PK103](#) [PK-ZS-013](#) [P6139B-PK10](#) [PQ215](#) [PQ218](#) [RT-ZI10C](#) [TT-SI 8071](#) [TT-SI 8050](#) [TT-SI 8010A](#) [TT-SI 7005](#) [GE.3421](#) [GE.2521](#) [GE.3121](#) [GE.1511](#) [GE.1521](#) [GE.2511](#) [GE.4511](#) [HVP15B](#) [TT-SI7002](#) [4005](#) [4011](#) [4012](#) [4013](#) [4014](#) [4015](#)