

## FP-2B-2

### MicroGripper - 1.25mm to 0.3mm Lead Pitch

#### FEATURES


- Used with SMT packages down to 0.3mm lead pitch
- Thin clip body width allows many lead grippers to be mounted side-by-side for simultaneous testing
- Maximum frequency is 100MHz



#### SPECIFICATIONS

Temperature Range:	0-70°C
Conductor Resistance:	(Short) 22 mOhms
Conductor Resistance:	(Long) 55 mOhms
Contact Resistance:	10 mOhms
Tines Diameter:	0.15mm
Body Height:	14mm
Body Material:	ABS
Voltage Usage:	+/- 40V
Rating:	500 WVDC
Bandwidth:	(3db) >100MHz
Inductance:	< 1mH @ 1KHz
Capacitance:	< 2.0pF @ 1KHz
Material:	Steel wire or stainless steel, nickel-plated

#### DIMENSIONS

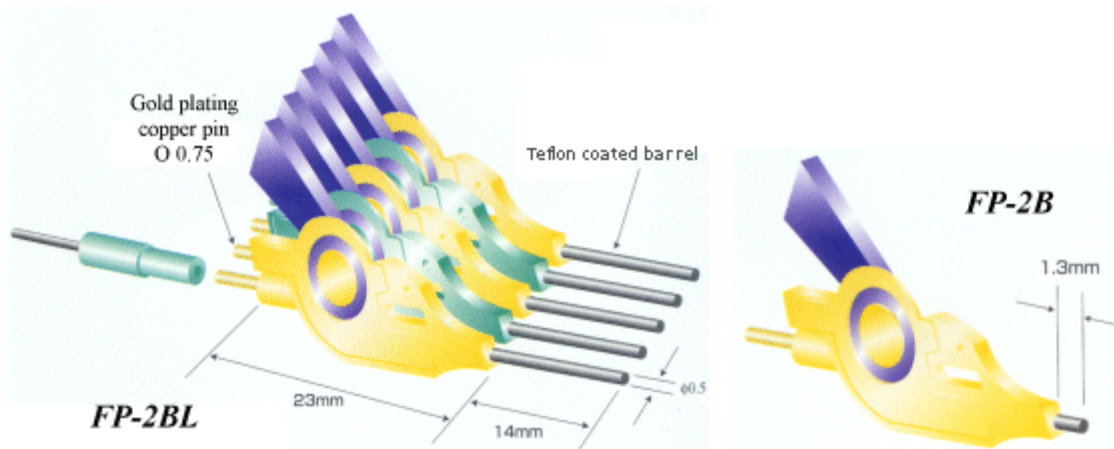

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Test Clips](#) category:*

*Click to view products by [Chip Quik](#) manufacturer:*

Other Similar products are found below :

[010000](#) [923743-16](#) [923850-C](#) [BU-656-0](#) [923738-28](#) [4140A](#) [4324A](#) [TL820](#) [TL822](#) [5116](#) [5450](#) [5216](#) [5252](#) [5454](#) [5694](#) [923700](#) [923698](#)  
[CR0060](#) [3038](#) [927739-20](#) [923743-14](#) [923743-40](#) [932146101](#) [930318100](#) [930126101](#) [Z-SB3FA3250AAAB04001](#) [Z-S11F0107G1000](#) [Z-](#)  
[S11F0207B1520](#) [Z-S11F0207B2030](#) [Z-S11F0207B15000](#) [Z-SB3FA3226AAAB11001](#) [Z-S11F0207B1010](#) [Z-S11F0207B3000](#) [923706](#)  
[930317800](#) [930317801](#) [973889100](#) [972405100](#) [972405101](#) [923714](#) [R999720600](#) [949-1](#) [458-3](#) [SK 201200278 020](#) [BU-65-B](#) [BU-21CPN-](#)  
[GZZZ](#) [PK-HVA-02](#) [BU-25C-DZZZ](#) [BU-142-2](#) [SAK 6675 NI / GNGE](#)