
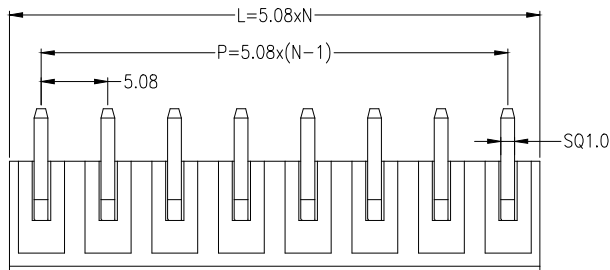


SECTION A-A

材料及电镀  
 ①.塑件主体: PA66, UL94V-0  
 ②.焊 针: 黄铜, 镀镍


电气性能  
 额定电压: 300V  
 额定电流: 15A  
 接触电阻: 20mΩ (Max)  
 绝缘电阻: 500MΩ\DC500V  
 耐 电 压: AC2000V\1Min

机械性能  
 温度范围: -40℃ ~ +105℃  
 瞬时温度: +250℃, 5秒

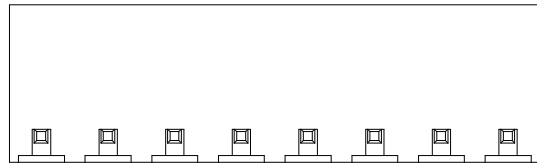

公差参数

| Poles  | Dim   | Dim P | Dim L |
|--------|-------|-------|-------|
| 2-6P   | ±0.10 | ±0.20 | ±0.20 |
| 7-12P  | ±0.20 | ±0.30 | ±0.30 |
| 13-18P | ±0.25 | ±0.40 | ±0.40 |
| 19-24P | ±0.30 | ±0.50 | ±0.50 |

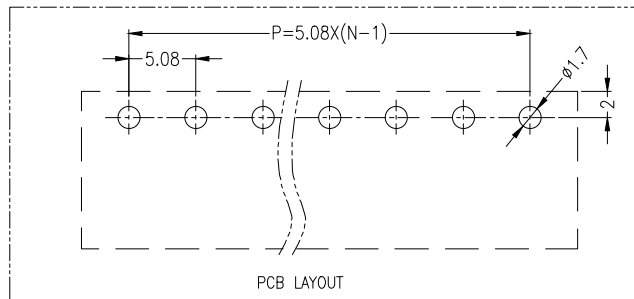

Ordering Information

XD2EDG

\* \* - \* - NP - \*

Type  
 V=直针  
 R=弯针  
 K=插座

款式-开口  
 C=封底  
 M=螺纹

PITCH  
 2.54=2.54mm  
 3.5=3.50mm  
 5.0=5.08mm  
 7.62=7.62mm

No. of Pins  
 2-24 Pin  
 26-27Pin  
 30-39Pin  
 .....

Colour  
 V=Green  
 r=Blue  
 C=Orange  
 R=Red  
 B=Black  
 GR=Gray

|           |                        |                   |                   |                  |   |                   |             |     |
|-----------|------------------------|-------------------|-------------------|------------------|---|-------------------|-------------|-----|
|           |                        |                   | GENERAL TOLERANCE | 制图<br>DRAWING    | 深圳讯答科技有限公司<br>ShenzhenXundaTechnology Co.,Ltd |                   |             |     |
|           |                        |                   | DIM TOL           | 审核<br>CHECK      |   |                   |             |     |
|           |                        |                   | X.X ±0.30         | 批准<br>APPROVAL   | 产品名称<br>TITLE                                 | 5.08 单排 插拔式 接线端子  | 版本<br>REV.  | A   |
|           |                        |                   | X.XX ±0.20        | 比例<br>SCALE      | 产品料号<br>PART NO.                              | 开口 弯针             | 单位<br>UNITS | mm  |
|           |                        |                   | X.XXX ±0.10       | 投影<br>Projection | 材料<br>MATERIAL                                | XD2EDGR-5.08-NP-V | 页次<br>SHEET | 1/1 |
| 序号<br>No. | 变更内容<br>MODIFY CONTENT | 日期<br>MODIFY DATE | Angle ±3.0°       |                  |   |                   |             |     |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pluggable Terminal Blocks](#) category:*

*Click to view products by [chxunda](#) manufacturer:*

Other Similar products are found below :

[57.510.0053](#) [721-104/026-047](#) [721-204/026-045](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#)  
[93.731.4953.0](#) [PVP03-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFP10210](#) [ELFT07250](#)  
[ELVD12100](#) [ELVF09400](#) [ELXH071G0E](#) [1725220000](#) [1760336](#) [1855000000](#) [19346](#) [1946309](#) [1973592](#) [19892](#) [25.320.4053.1](#) [25.320.4553.9](#)  
[25.320.4753.1](#) [25.320.5453.1](#) [25.340.0353.1](#) [25.340.1053.1](#) [25.345.3553.0M001](#) [25.640.3553.1](#) [SH02-5,08](#) [SH06-3,81](#) [SH08-5,08](#) [SH08-](#)  
[5,08-K](#) [SH12-5,08](#) [SHS04-5,00](#) [30.303](#) [30.305](#) [30.306](#) [PHP09-5,08](#) [25.193.0453.0](#) [25.320.4653.1](#) [25.332.2453.1](#)