
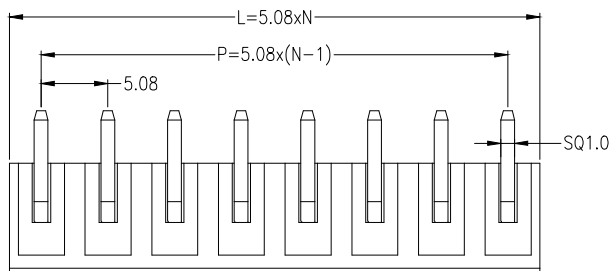


SECTION A-A

材料及电镀
 ①.塑件主体: PA66, UL94V-0
 ②.焊 针: 黄铜, 镀镍


电气性能
 额定电压: 300V
 额定电流: 15A
 接触电阻: 20mΩ (Max)
 绝缘电阻: 500MΩ\DC500V
 耐 电 压: AC2000V\1Min

机械性能
 温度范围: -40℃ ~ +105℃
 瞬时温度: +250℃,5秒

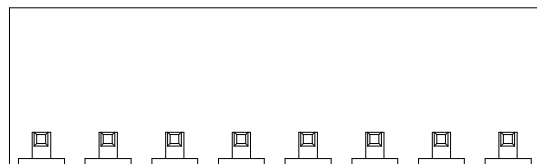

公差参数

| Poles | Dim | Dim P | Dim L |
|--------|-------|-------|-------|
| 2-6P | ±0.10 | ±0.20 | ±0.20 |
| 7-12P | ±0.20 | ±0.30 | ±0.30 |
| 13-18P | ±0.25 | ±0.40 | ±0.40 |
| 19-24P | ±0.30 | ±0.50 | ±0.50 |

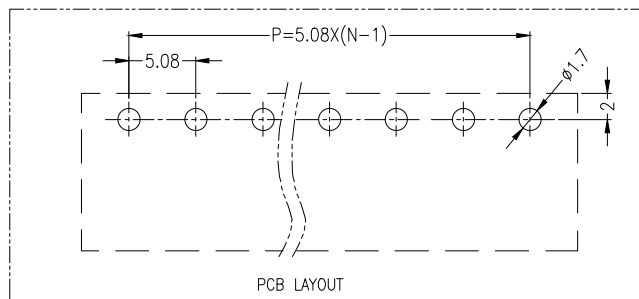

PCB LAYOUT

Ordering Information

XD2EDG

* * - * - NP - *

Type
 V=直针
 R=弯针
 K=插座

嵌针-开口
 C=封胶
 M=螺柱

PITCH
 2.54=2.54mm
 3.5=3.5mm
 3.81=3.81mm
 5.08=5.08mm
 7.62=7.62mm

No. of Pins
 2-24 Pin
 26-27Pin
 3P=3Pin

Colour
 V=Green
 r=Blue
 C=Orange
 R=Red
 B=Black
 GR=Gray

| | | | | | | | |
|-----------|------------------------|-------------------|-------------------|------------------|---|-------------------|-----|
| | | | GENERAL TOLERANCE | 制图 DRAWING | 深圳讯答科技有限公司 ShenzhenXundaTechnology Co.,Ltd | | |
| | | | DIM TOL | 审核 CHECK | | | |
| | | | X.X ±0.30 | 批准 APPROVAL | 产品名称 TITLE | 5.08 单排 插拔式 接线端子 | |
| | | | X.XX ±0.20 | 比例 SCALE | 产品料号 PART NO. | XD2EDGR-5.08-NP-V | |
| | | | X.XXX ±0.10 | 投影 Projection | 材料 MATERIAL | | |
| 序号 No. | 变更内容 MODIFY CONTENT | 日期 MODIFY DATE | Angle ±3.0° | | | 版本 REV. | A |
| | | | | | | 单位 UNITS | mm |
| | | | | | | 页次 SHEET | 1/1 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pluggable Terminal Blocks](#) category:

Click to view products by [chxunda](#) manufacturer:

Other Similar products are found below :

[57.510.0053](#) [721-104/026-047](#) [721-204/026-045](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#)
[93.731.4953.0](#) [PVP03-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFP10210](#) [ELFT07250](#)
[ELVD12100](#) [ELVF09400](#) [ELXH071G0E](#) [1725220000](#) [1760336](#) [1855000000](#) [19346](#) [1946309](#) [1973592](#) [19892](#) [25.320.4053.1](#) [25.320.4553.9](#)
[25.320.4753.1](#) [25.320.5453.1](#) [25.340.0353.1](#) [25.340.1053.1](#) [25.345.3553.0M001](#) [25.640.3553.1](#) [SH02-5,08](#) [SH06-3,81](#) [SH08-5,08](#) [SH08-](#)
[5,08-K](#) [SH12-5,08](#) [SHS04-5,00](#) [30.303](#) [30.305](#) [30.306](#) [PHP09-5,08](#) [25.193.0453.0](#) [25.320.4653.1](#) [25.332.2453.1](#)