



# CFB600W-110S SERIES

## 600 WATT

### DC-DC CONVERTERS



## FEATURES

- \* 600W Isolated Output
- \* Efficiency to 88%
- \* Regulated Outputs
- \* Isolated Remote On/Off
- \* Over Temperature Protection
- \* Over Voltage/Current Protection
- \* Continuous Short Circuit Protection
- \* Full-Brick Size Meet Industry Standard
- \* Meet EN50155 with External Circuits
- \* Shock & Vibration Meet EN50155 (EN61373)
- \* Meet UL60950-1 2<sup>nd</sup> (Basic Insulation)
- \* Fire & Smoke Meet EN45545-2



MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		% EFF. (3)	CAPACITOR LOAD MAX.
			MIN.	MAX.	NO LOAD	FULL LOAD		
CFB600W-110S12	43-160 VDC	12 VDC	0 mA	50 A	25 mA	6.3 A	87	10000 $\mu$ F
CFB600W-110S24	43-160 VDC	24 VDC	0 mA	25 A	25 mA	6.2 A	88	10000 $\mu$ F
CFB600W-110S28	43-160 VDC	28 VDC	0 mA	21.4 A	25 mA	6.2 A	88	10000 $\mu$ F
CFB600W-110S48	43-160 VDC	48 VDC	0 mA	12.5 A	25 mA	6.2 A	88	10000 $\mu$ F

#### NOTE:

1. Nominal Input Voltage 110 VDC.
2. The Output Terminal Required a Minimum Capacitor 470uF to Maintain Specified Regulation.
3. Measure at Nominal Input Voltage.

# SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

## INPUT SPECIFICATIONS:

Input Voltage Range	110V	43 - 160V
Input Surge Voltage (100ms max.)		180Vdc max.
Under Voltage Lockout	Power Up	42V
	Power Down	40V
Opto Isolated Remote On/Off (note8)		
Input Filter		PI Type

## OUTPUT SPECIFICATIONS:

Voltage Accuracy	$\pm 1.0\%$ max.
Transient Response: 25% Step Load Change	<500us
External Trim Adj. Range	60% - 110%
Ripple & Noise, 20MHz BW(note3)	
12V	60mV RMS, 120mV pk-pk max.
24V	100 mV RMS, 240mV pk-pk max.
28V	100 mV RMS, 280mV pk-pk max.
48V	200 mV RMS, 480mV pk-pk max.
Temperature Coefficient	$\pm 0.03\%/^{\circ}\text{C}$ max.
Short Circuit Protection	Continuous
Line Regulation (note1)	$\pm 0.2\%$ max.
Load Regulation (note2)	$\pm 0.5\%$ max.
Over Voltage Protection trip Range, % Vo nom.	115-140%
Current Limit	105-140% Nominal Output
Auxiliary Output Voltage/Current	$10\pm 3\text{Vdc}/20\text{mA}$ max.
Load Share Accuracy	$\pm 10\%$ at 50% to 100% Full Load
Start up time	160ms typ.

## GENERAL SPECIFICATIONS:

Efficiency	See Table
Isolation Voltage	Input/Output, Input/Case 2250VDC min. Output/Case 1500VDC min.
Isolation Resistance	$10^7$ ohm min.
Isolation Capacitance	4000pF typ.
Switching Frequency	250KHz typ.
Operating Case Temperature	$-40^{\circ}\text{C}$ to $100^{\circ}\text{C}$
Storage Temperature	$-55^{\circ}\text{C}$ to $+105^{\circ}\text{C}$
Thermal Shutdown, Case Temp.	$110^{\circ}\text{C}$ typ.
Humidity	95% RH max. Non condensing
Operating Altitude	2000m
MTBF	MIL-HDBK-217F, GB, 25°C, Full Load 450Khrs typ.
Safety	UL60950-1 2 <sup>nd</sup> (Basic insulation)
EMC (note5)	Meet EN50155(EN50121-3-2) with External Filter
Shock/Vibration	Meet EN50155(EN61373)
Environmental	Meet EN50155(EN60068-2-1)
Dimensions	4.60x2.40x0.50 inches (116.8x61.0x12.7mm)
Case Material	Aluminum Baseplate with Plastic Case
Weight	220g

## NOTE:

1. Measured from high line to low line.
2. Measured from full load to zero load.
3. Output ripple and noise measured with 10uF tantalum capacitor and 1uF ceramic capacitor across output. (48Vo: 10uF aluminum capacitor and 1.0uF ceramic capacitors)
4. An external input capacitor 220uF for all models are recommended to reduce input ripple voltage.
5. For information about EN50155 and RIA12, refer to application note.
6. Trim-up: connect a resistor between trim pin and +sense.  
Trim-down: connect a resistor between trim pin and -sense.
7. Suffix "-C0" to the model number with threaded mounting holes (M3x0.5).
8. Standard model is negative logic, suffix "P" to the model number with positive logic. (refer application note)

## CASE FB

All Dimensions in Inches[mm]


Tolerance Inches:x.xx $\pm 0.02$ , x.xxx $\pm 0.01$

Millimeters:x.x $\pm 0.5$ , x.xx $\pm 0.25$

Pin

$\pm 0.004$

$\pm 0.1$

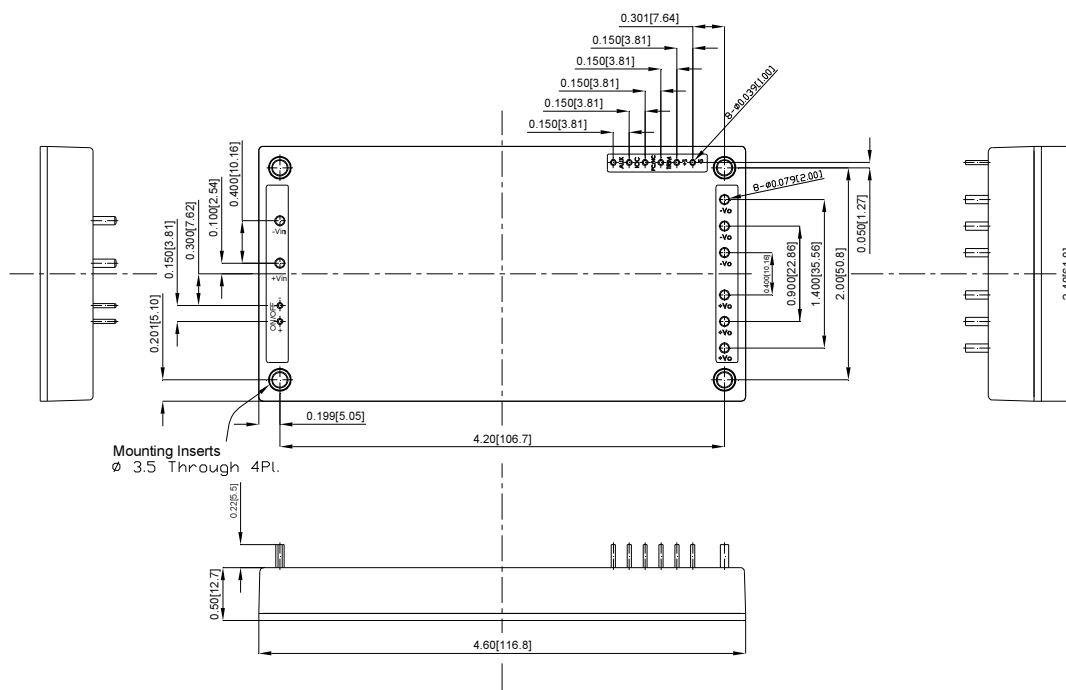

PIN CONNECTION

PIN NUMBER	CONNECTION
1	-V Input
2	+V Input
3	-On/Off
4	+On/Off
5-7	+V Output
8-10	-V Output
11	-Sense
12	+Sense
13	TRIM
14	PC
15	IOC
16	AUX

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Isolated DC/DC Converters](#) category:*

*Click to view products by [Cincon](#) manufacturer:*

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#)  
[CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#)  
[XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-N61-CM](#) [VI-R5022-EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#)