




CFM36S SERIES 36 WATT OPEN FRAME AC-DC MODULES

Features

- Universal Input Range 90~264V_{ac}
- High Efficiency up to 89%
- 1.5"x 3" Size
- Class II: Type "Blank" & "E"
- Class II or I: Type "T"
- No Load Power <0.1W
- Approval IEC/EN/UL 62368-1
- Approval EN 55032 Class B and CISPR/FCC Class B
- Design Meets IEC/EN 60335-1
- Operating Altitude 5000m
- Continuous Short Circuit Protection
- Over Voltage Protection

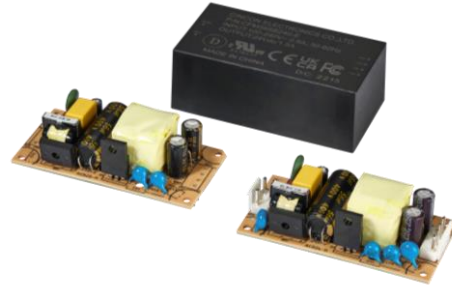

MODEL NUMBER	OUTPUT VOLTAGE	OUTPUT CURRENT	RIPPLE& NOISE NOTE2	VOLTAGE ACCURACY NOTE1	LINE REGULATION NOTE3	LOAD REGULATION NOTE4	%EFF. (Typ.) NOTE5
CFM36SA050	5.0 V	6.0 A	100 mV	±2%	±0.5%	±1%	85%
CFM36SA120	12 V	3.0 A	120 mV	±2%	±0.5%	±1%	88%
CFM36SA150	15 V	2.4 A	150 mV	±2%	±0.5%	±1%	88%
CFM36SA240	24 V	1.5 A	240 mV	±2%	±0.5%	±1%	89%
CFM36SA480	48 V	0.75 A	480 mV	±2%	±0.5%	±1%	89%
CFM36SB050	5.0 V	6.0 A	100 mV	±2%	±0.5%	±1%	85%
CFM36SB120	12 V	3.0 A	120 mV	±2%	±0.5%	±1%	88%
CFM36SB150	15 V	2.4 A	150 mV	±2%	±0.5%	±1%	88%
CFM36SB240	24 V	1.5 A	240 mV	±2%	±0.5%	±1%	89%
CFM36SB480	48 V	0.75 A	480 mV	±2%	±0.5%	±1%	89%

Note:

1. Voltage accuracy is set at 100% full load.
2. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to output for ripple & noise measurement @20MHz BW.
3. Line regulation is measured from high line to low line with 100% full load.
4. Load regulation is measured from 10% to 100% full load.
5. Typical efficiency at 230 Vac and 100% full load at 25°C.
6. T Version wafer with TAIWAN KING PIN TERMINAL PVHI series, JST PH series and mate with PVHI series or equivalent.

PART NUMBER

Series	Number of Outputs	Nominal Output Voltage	Type
CFM36	SX	XXX	-X
CFM36	SA : Single, Class I (Type "T" Only) SB : Single, Class II (All Types)	050 : 5.0V 120 : 12V 150 : 15V 240 : 24V 480 : 48V	Blank : PCB mount T : Wafer E : Encapsulated

Part Number Example:

- CFM36SB120:** 36W, Single 12Vdc Output, Class II, PCB Mount Type.
- CFM36SB120-E:** 36W, Single 12Vdc Output, Class II, Encapsulated Type.
- CFM36SA120-T:** 36W, Single 12Vdc Output, Class I, Wafer Type.
- CFM36SB120-T:** 36W, Single 12Vdc Output, Class II, Wafer Type.



CFM36S Series

TECHNICAL SPECIFICATIONS

(All specifications are typical at nominal input, 100% full load at 25°C unless otherwise noted.)

ABSOLUTE MAXIMUM RATINGS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input Voltage	Safety approvals only to the AC input	All	90		264	V _{ac}
			120		370	V _{dc}
Operating Temperature	See Derating Curve	All	-40		80	°C
Storage Temperature		All	-40		85	°C
Operating Altitude	IEC/EN/UL 62368-1 Meets EN 60335-1	All			5000	m
					2000	

INPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Operating Voltage Range	See Derating Curve	All	100		240	V _{ac}
Input Frequency Range		All	50		60	Hz
Maximum Input Current	100% Full load, V _{in} =100V _{ac}	All			0.9	A
Leakage Current		All			0.1	mA
Inrush Current	V _{in} =240V _{ac} , Cold start at 25°C	All			90	A

OUTPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Output Voltage Set Point	V _{in} =Nominal V _{in} , I _o =I _o max., T _c =25°C	CFM36SX050	4.90	5	5.10	V _{dc}
		CFM36SX120	11.76	12	12.24	
		CFM36SX150	14.70	15	15.30	
		CFM36SX240	23.52	24	24.48	
		CFM36SX480	47.02	48	48.96	
Operating Output Current Range	V _{in} =90V _{ac} ~240V _{ac} , See Derating Curve	CFM36SX050			6.0	A
		CFM36SX120			3.0	
		CFM36SX150			2.4	
		CFM36SX240			1.5	
		CFM36SX480			0.75	
Holdup Time	V _{in} =115V _{ac}	All		8		ms
Output Voltage Regulation						
Load Regulation	10% to 100% Full load	All			±1.0	%
Line Regulation	V _{in} =High line to low line	All			±0.5	%
Over Current Protection	Hiccup mode, auto recovery	All	110		180	%
Short Circuit Protection	Auto recovery	All				
Over Voltage Protection	Latch mode (AC recycle to restart)	CFM36SX050			7.44	V _{dc}
		CFM36SX120			16.8	
		CFM36SX150			21.5	
		CFM36SX240			31.5	
		CFM36SX480			63.0	



CFM36S Series

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Output Ripple and Noise	1. Add a 0.1uF ceramic capacitor and a 10uF aluminum electrolytic capacitor to output 2. Oscilloscope is 20MHz bandwidth 3. Ambient temperature=25°C	CFM36SX050			100	mV
		CFM36SX120			120	
		CFM36SX150			150	
		CFM36SX240			240	
		CFM36SX480			480	
Load Capacitance	1. $V_{in}=115V_{ac}$ and $230V_{ac}$ 2. Output is 100% full load 3. Ambient temperature=25°C	CFM36SX050			6000	uF
		CFM36SX120			3000	
		CFM36SX150			2400	
		CFM36SX240			1500	
		CFM36SX480			750	
Efficiency	1. $V_{in}=230V_{ac}$ 2. Output is 100% full load 3. Ambient temperature=25°C	CFM36SX050		85		%
		CFM36SX120		88		
		CFM36SX150		88		
		CFM36SX240		89		
		CFM36SX480		89		

ISOLATION CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input to Output	1 minute	All			4000	V_{ac}
Isolation Resistance	Input to output	All	100			MΩ

FEATURE CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Switching Frequency	$P_{out}=\max.$ rated power	All		65		kHz

GENERAL SPECIFICATIONS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
MTBF	$I_o=100\%$; $T_a=25^\circ C$ per MIL-HDBK-217F	All	700			k hours
Humidity	Non-condensing	All			93	% RH
Shock	Meet MIL-STD-810F Table 516.5, Table 516.5-1 10ms, each axis 3 times($\pm X$ 、 $\pm Y$ 、 $\pm Z$ axis)	All		75		g
Vibration	Meet MIL-STD-810F Table 514.5C-VIII, 15~2000Hz, X、Y、Z axis, 1 hour (each axis), Total 3 hrs.	All		4		g
Weight	Blank (PCB mount)	All		55		grams
	T (Wafer)			55		
	E (Encapsulated)			156		
Dimensions	Blank (PCB mount)	All	3.00x1.50x1.100 Inches (76.2x38.1x27.94 mm)			
	T (Wafer)		3.00x1.50x1.000 Inches (76.2x38.1x25.40 mm)			
	E (Encapsulated)		3.10x1.60x1.134 Inches (78.8x40.7x28.80 mm)			
Safety	Class I or II, IEC/EN/UL 62368-1					
EMC Emission	EN 55032:2015+A11:2020, 47 CFR FCC Part 15 Subpart B, ICES-003 Issue7, EN 61204-3:2018, EN 61000-6-3:2021, EN 61000-6-4:2019, EN 61000-3-2:2019, EN 61000-3-3:2013+A1:2019					Class B
Conducted Disturbance	EN 55032:2015+A11:2020, 47 CFR FCC Part 15 Subpart B, ICES-003 Issue7, EN 61204-3:2018, EN 61000-6-3:2021, EN 61000-6-4:2019					Class B
Radiated Disturbance	EN 55032:2015+A11:2020, 47 CFR FCC Part 15 Subpart B, ICES-003 Issue7, EN 61204-3:2018, EN 61000-6-3:2021, EN 61000-6-4:2019					Class B
Harmonic Current Emissions	EN 61000-3-2:2019					
Voltage Fluctuations & Flicker	EN 61000-3-3:2013+A1:2019					
EMC Immunity	EN 55035:2017+A11:2020, EN 61204-3:2018, EN 61000-6-1:2019, EN 61000-6-2:2019					
Electrostatic Discharge (ESD)	IEC 61000-4-2:2008					Criterion A





CFM36S Series

GENERAL SPECIFICATIONS





Radio-Frequency, Continuous Radiated Disturbance	IEC 61000-4-3:2020	Criterion A
Electrical Fast Transient (EFT)	IEC 61000-4-4:2012, $\pm 1\text{kV}$, $\pm 2\text{kV}$	Criterion A
Surge	IEC 61000-4-5:2014+A1:2017, L-N: $\pm 0.5\text{kV}$, $\pm 1\text{kV}$, L-E(Ground): $\pm 0.5\text{kV}$, $\pm 1\text{kV}$, $\pm 2\text{kV}$	Criterion A
Conducted Disturbances, Induced by RF Fields	IEC 61000-4-6:2013+COR1:2015	Criterion A
Power Frequency Magnetic Field	IEC 61000-4-8:2009	Criterion A
Voltage Dips	IEC 61000-4-11:2020, Dip: 30% Reduction, Dip >95% Reduction	Criterion A
Voltage Interruptions	IEC 61000-4-11:2020, >95% Reduction	Criterion B
Application Note Link	CFM36S Series App Notes	

CHARACTERISTIC CURVE

Power Derating Curve

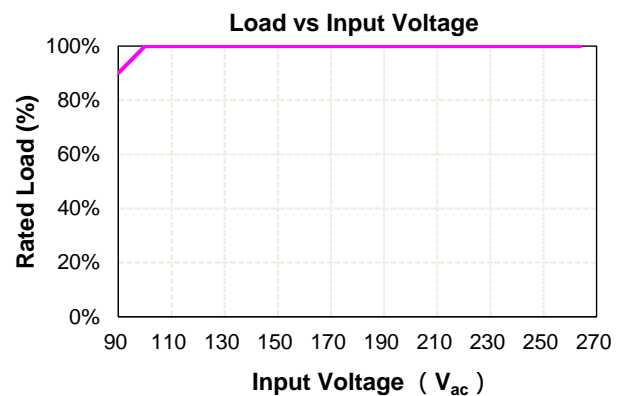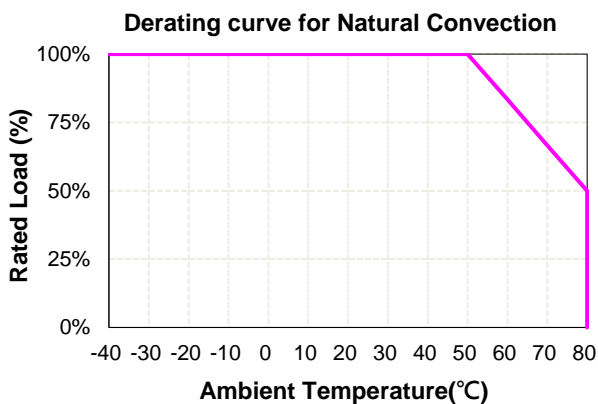


Performance Data

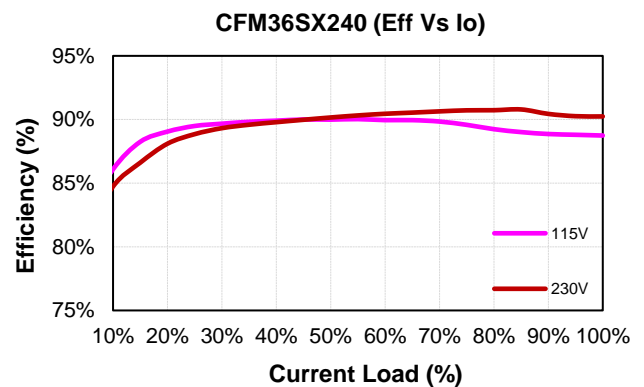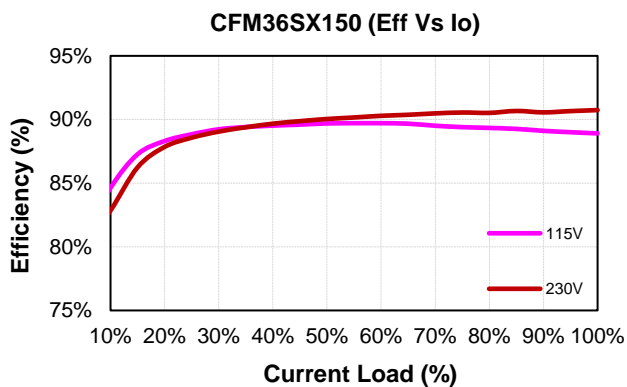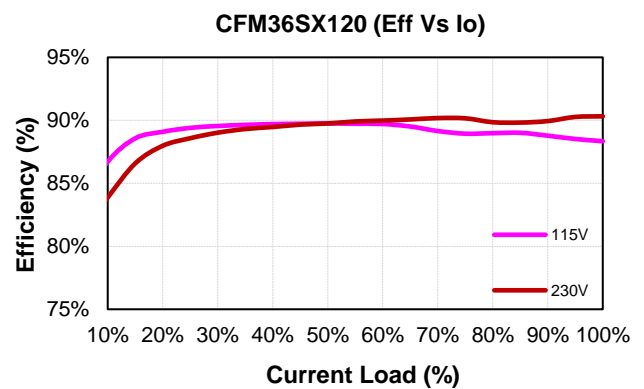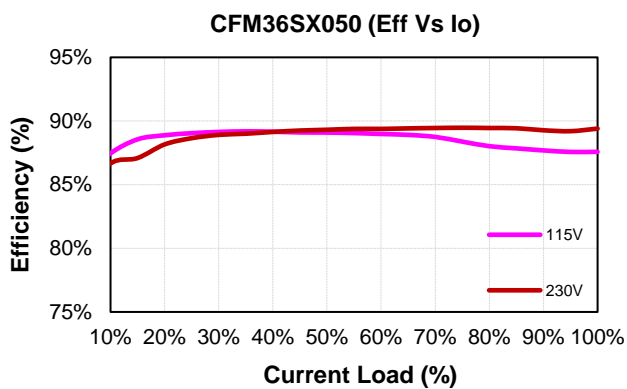




CFM36S Series

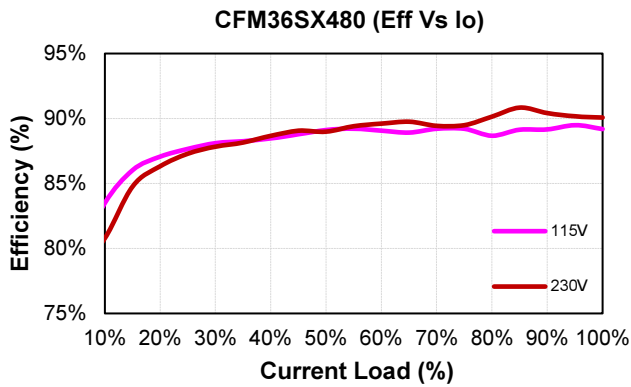

MECHANICAL SPECIFICATION

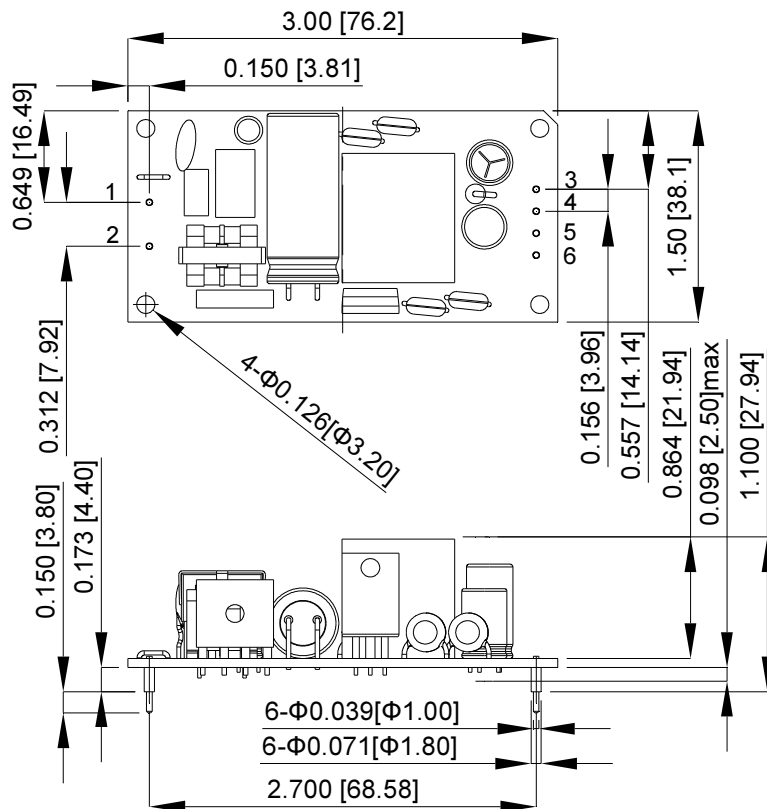

CFM36SBXXX

PIN CONNECTION	
Pin	Function
1	ACN
2	ACL
3	+Vout
4	+Vout
5	-Vout
6	-Vout


All Dimensions in Inches[mm]
 Tolerance Inches: x.xx=±0.03, x.xxx=±0.020
 Millimeters: x.x=±0.7, x.xx=±0.50

CINCON Electronics Co. Ltd.
 Add: 14F, No. 306, Sec.4, Hsin Yi Rd., Taipei, Taiwan
 Tel: 886-2-27086210
 Fax: 886-2-27029852
 E-mail: sales@cincon.com.tw
 Web: www.cincon.com



CFM36S Series


MECHANICAL SPECIFICATION

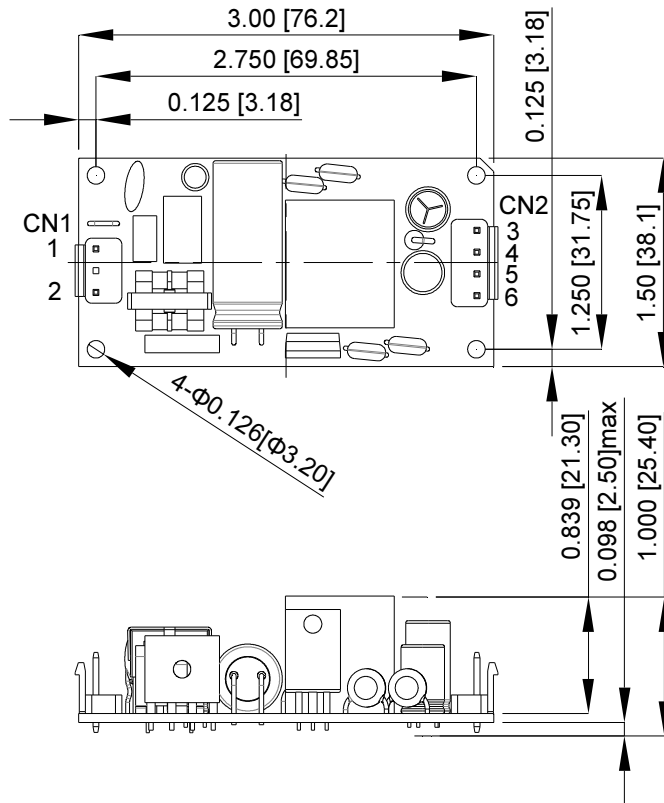

CFM36SBXXX-T

PIN CONNECTION		
Pin	Function	Wafer
1	ACN	CN1
2	ACL	
3	+Vout	CN2
4	+Vout	
5	-Vout	
6	-Vout	

All Dimensions in Inches[mm]
 Tolerance Inches: x.xx=±0.03, x.xxx=±0.020
 Millimeters: x.x=±0.7, x.xx=±0.50

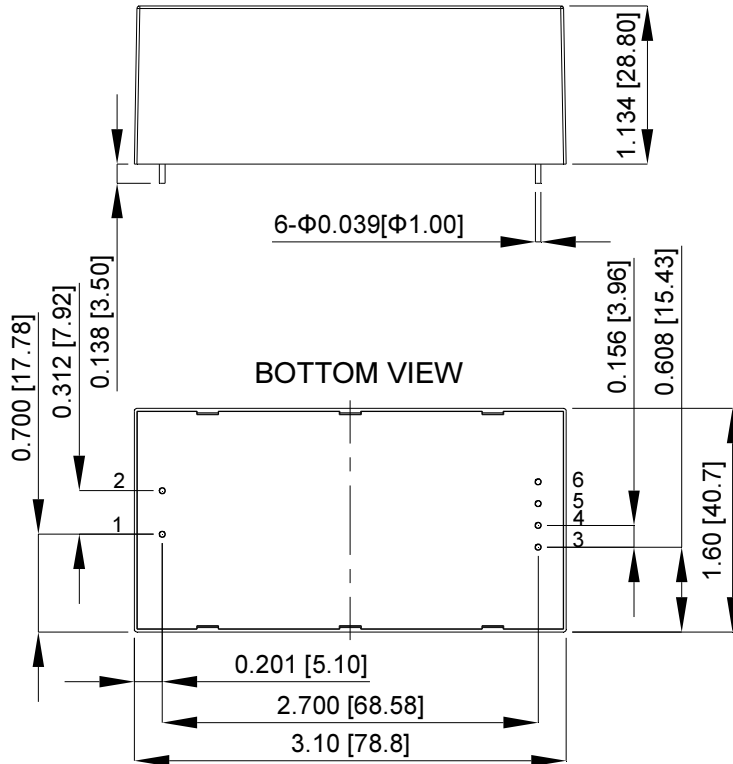

CFM36SBXXX-E

PIN CONNECTION	
Pin	Function
1	ACN
2	ACL
3	+Vout
4	+Vout
5	-Vout
6	-Vout


All Dimensions in Inches[mm]
 Tolerance Inches: x.xx=±0.03, x.xxx=±0.020
 Millimeters: x.x=±0.7, x.xx=±0.50

CINCON Electronics Co. Ltd.
 Add: 14F, No. 306, Sec.4, Hsin Yi Rd., Taipei, Taiwan
 Tel: 886-2-27086210
 Fax: 886-2-27029852
 E-mail: sales@cincon.com.tw
 Web: www.cincon.com



CFM36S Series

MECHANICAL SPECIFICATION

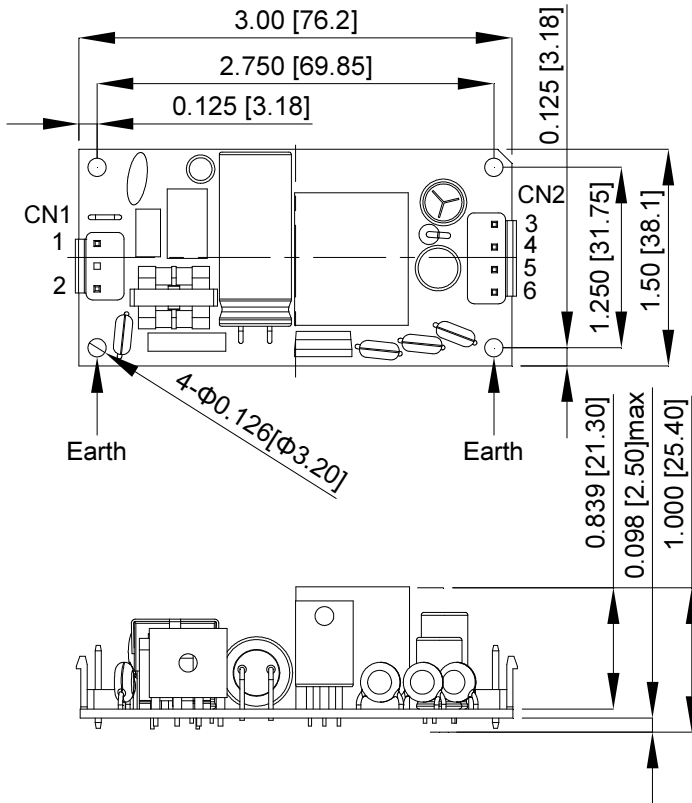

CFM36SAXXX-T

PIN CONNECTION		
Pin	Function	Wafer
1	ACN	CN1
2	ACL	
3	+Vout	CN2
4	+Vout	
5	-Vout	
6	-Vout	

All Dimensions in Inches[mm]
 Tolerance Inches: x.xx=±0.03, x.xxx=±0.020
 Millimeters: x.x=±0.7, x.xx=±0.50

CINCON Electronics Co. Ltd.
 Add: 14F, No. 306, Sec.4, Hsin Yi Rd., Taipei, Taiwan
 Tel: 886-2-27086210
 Fax: 886-2-27029852
 E-mail: sales@cincon.com.tw
 Web: www.cincon.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [AC/DC Power Modules](#) category:

Click to view products by [Cincon](#) manufacturer:

Other Similar products are found below :

[HP01S0500WI](#) [HP01S1200WI](#) [HP01S2400WI](#) [HP03S1200WJ](#) [HP03S2400WJ](#) [ZP03S1200WE](#) [ZP05S2400WB](#) [AMEOF550-24SHAMJZ-FB](#)
[AMEOF550-48SHAMJZ-FB](#) [AMEOFL10-3S480PEVZ-B](#) [AMEOFL10-9S480PEVZ-B](#) [AMEOFL5-3S480HANZ-B](#) [AMEOFL5-9S480HANZ-B](#) [HP02S1200WI](#) [AME30-9S480JZ-B](#) [AME30-3S480JZ-B](#) [ZP05S1800WB](#) [ZP10S2400W](#) [ZP03S0500WE](#) [AMEOF450-48SHAMJZ-FB](#) [AMEL15-3S277HAVZ-B](#) [AME30-48S480JZ-B](#) [AME30-15S480JZ-B](#) [CFM36SB480-T](#) [EZAC-R11-QE8](#) [LD10-20B12](#)
[LHE05-20D0524-01](#) [LD10-23B24R2](#) [LD05-23B12](#) [LDE10-20B12](#) [LDE20-20B12](#) [LD10-23B12R2](#) [IRM-20-12](#) [LH10-23B05R2](#) [LHE05-20D0505-01](#) [LHE20-20D0524-03](#) [IRM-5-24](#) [IRM-10-12](#) [LH10-10D0524-02](#) [LH10-10B24](#) [LH10-10B12](#) [LH10-23B12R2](#) [LHE10-20D0512-02](#) [LH10-23B24R2](#) [LHE20-20D0512-06](#) [LH25-23B12R2](#) [IRM-10-24](#) [IRM-5-12](#) [LD10-20B24](#) [LD10-20B05](#)