



FEATURES

- * 33W-50W Isolated Output
- * Efficiency to 89%
- * 300/400KHz Switching Frequency
- * 2:1 Input Range
- * Regulated Outputs
- * Continuous Short Circuit Protection
- * Five-Sided Metal Case
- * Half-Brick Size Meet Industrial Standard
- * Safety Meets IEC/EN/UL60950-1
- * UL60950-1 Approval



MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		% EFF.	CAPACITOR LOAD MAX.
			MIN.	MAX.	NO LOAD	FULL LOAD		
CHB50-12S33	9 -18 VDC	3.3 VDC	0 mA	10 A	50 mA	3481 mA	79	10000uF
CHB50-12S05	9 -18 VDC	5 VDC	0 mA	10 A	50 mA	5020 mA	83	10000uF
CHB50-12S12	9 -18 VDC	12 VDC	0 mA	4.16 A	50 mA	4781 mA	87	4000uF
CHB50-12S15	9 -18 VDC	15 VDC	0 mA	3.33 A	50 mA	4781 mA	87	2000uF
CHB50-12S24	9 -18 VDC	24 VDC	0 mA	2.08 A	50 mA	4781 mA	87	1500uF
CHB50-24S33	18-36 VDC	3.3 VDC	0 mA	10 A	50 mA	1698 mA	81	10000uF
CHB50-24S05	18-36 VDC	5 VDC	0 mA	10 A	50 mA	2450 mA	85	10000uF
CHB50-24S12	18-36 VDC	12 VDC	0 mA	4.16 A	50 mA	2363 mA	88	10000uF
CHB50-24S15	18-36 VDC	15 VDC	0 mA	3.33 A	50 mA	2363 mA	88	4000uF
CHB50-24S24	18-36 VDC	24 VDC	0 mA	2.08 A	50 mA	2363 mA	88	2000uF
CHB50-48S33	36-75 VDC	3.3 VDC	0 mA	10 A	50 mA	848 mA	81	10000uF
CHB50-48S05	36-75 VDC	5 VDC	0 mA	10 A	50 mA	1240 mA	84	10000uF
CHB50-48S12	36-75 VDC	12 VDC	0 mA	4.16 A	50 mA	1181 mA	88	10000uF
CHB50-48S15	36-75 VDC	15 VDC	0 mA	3.33 A	50 mA	1181 mA	88	4000uF
CHB50-48S24	36-75 VDC	24 VDC	0 mA	2.08 A	50 mA	1168 mA	89	2000uF

NOTE: 1. Nominal Input Voltage 12, 24 or 48VDC

SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

INPUT SPECIFICATIONS:

Input Voltage Range	12V	9-18V
	24V	18-36V
	48V	36-75V

Input Surge Voltage (100ms max.)	12V	25Vdc max.
	24V	50Vdc max.
	48V	100Vdc max.

Under Voltage Lockout:

12Vin	power up	8.8V, power down	8V
24Vin	power up	17V, power down	16V
48Vin	power up	34V, power down	32.5V

Positive Logic Remote On/Off (note3&4)

Input Filter	Pi Type
--------------------	---------

OUTPUT SPECIFICATIONS:

Voltage Accuracy	±1.0% max.
------------------------	------------

Transient Response: 25% Step Load Change	<500µs
--	--------

External Trim Adj. Range	±10%
--------------------------------	------

Ripple & Noise, 20MHz BW(see note5)

3.3V & 5V	20mV RMS max.
	75mV pk-pk max.
12V & 15V	30mV RMS max.
	100mV pk-pk max.
24V	100mV RMS max.
	240mV pk-pk max.

Temperature Coefficient	±0.03%/°C max.
-------------------------------	----------------

Short Circuit Protection	Continuous
--------------------------------	------------

Line Regulation (note1)	±0.2% max.
-------------------------------	------------

Load Regulation (note2)	±0.2% max.
-------------------------------	------------

Over Voltage Protection Trip Range, % Vo nom.	115-140%
---	----------

Current Limit	110% ~150% Nominal Output
---------------------	---------------------------


Start up Time	5ms typ.
---------------------	----------

CASE HB


All Dimensions In Inches(mm)

Tolerances Inches: X.XX= ±0.02 , X.XXX= ±0.010

Millimeters: X.X= ±0.5 , X.XX=±0.25

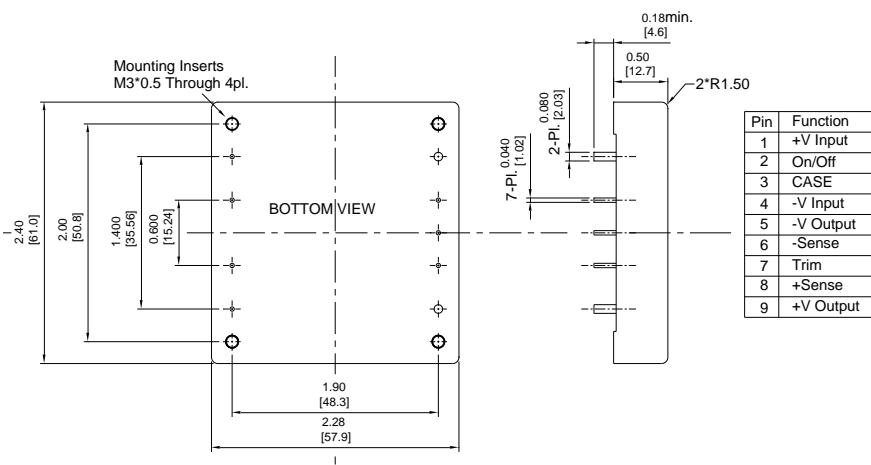

REMOTE ON/OFF CONTROL

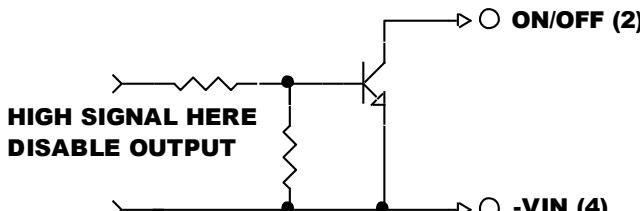

GENERAL SPECIFICATIONS:

Efficiency	See Table	
Isolation Voltage	Input/Output	1500VDC min.
	Input/Case	1500VDC min.

Output/Case	1500VDC min.
-------------------	--------------

Isolation Capacitance	1000pF typ.
Isolation Resistance	10 ⁷ ohm min.

Switching Frequency	(12/24)Vin	400KHz typ.
	48Vin	300KHz typ.

Operating Case Temperature	-40°C to 100°C
----------------------------------	----------------

Storage Temperature	-55°C to +105°C
---------------------------	-----------------

Thermal Shutdown Case Temp.	100°C typ.
-----------------------------------	------------

Humidity	95% RH max. Non condensing
----------------	----------------------------

MTBF	MIL-HDBK-217F, GB, 25°C, Full Load	1000Khrs typ.
------------	--	---------------

Dimensions	2.28×2.40×0.50 inches (57.9x61.0x12.7 mm)
------------------	---


Case Material	Aluminum
---------------------	----------

Weight	88g
--------------	-----

NOTE:

1. Measured from high line to low line.
2. Measured from full load to zero load.
3. Logic compatibility
4. Suffix "N" to the model number with negative logic remote on/off.
5. Output ripple and noise measured with 10uF tantalum and 1uF ceramic capacitor across output.
6. Suffix "-C" to the model number with clear mounting Insert (3.2mm DIA.)
7. ON/OFF Pin is not directly applied voltage, please refer to remote on / off control circuit.

EXTERNAL OUTPUT TRIM

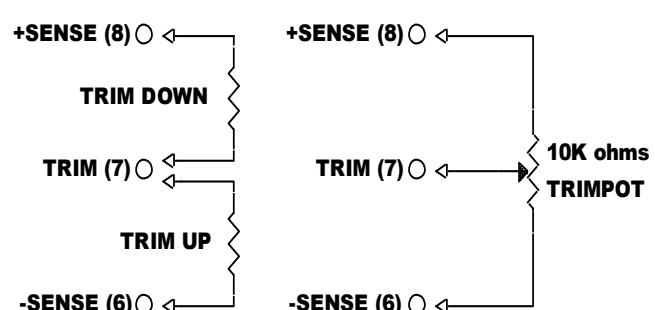

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [Cincon manufacturer:](#)

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#)
[CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#) [XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-N61-CM](#) [VI-R5022-EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#)