



## Features

- \* Universal AC Input Range 90-264Vac
- \* High Active PFC >0.9
- \* Low Inrush Current <5A
- \* Low Profile for Easy Installation
- \* Low Flicker for Lighting, with Low ripple & noise
- \* Output Constant Current Design
- \* Continuous Short Circuit Protection
- \* Suitable for LED Lighting and Moving Sign Applications
- \* Safety meet IEC/EN61347, PSE

# CLD50 SERIES

## 50 WATT DUAL OUTPUT LED POWER SUPPLY



MODEL	Input Voltage Range	Output Operating Voltage		Output Rated Current	Output Rated Power	Output Voltage Maximum	Ripple and Noise (max.) Note2	Efficiency (Typical) Note3
CLD50D240 -C100	90-264Vac	V1	8-24VDC	1000mA	24W	30VDC	300mVpp	85%
		V2	8-24VDC	1000mA	24W	30VDC	300mVpp	
CLD50D420 -C060	90-264Vac	V1	18-42VDC	600mA	25.2W	48VDC	300mVpp	86%
		V2	18-42VDC	600mA	25.2W	48VDC	300mVpp	

Note:

1. Nominal Input Voltage: 100Vac, 230Vac
2. Ripple and Noise are measured at rated current, 100Vac, Vo=36Vdc(CLD50D420), 21V(CLD50D240) and 20MHz bandwidth with a 0.1uF ceramic capacitor.
3. Measured at rated current, 100Vac, Vo=36Vdc(CLD50D420), 21Vdc(CLD50D240)

## Specifications

All specifications are Typical at nominal line, full load and 25°C unless otherwise noted

### INPUT SPECIFICATIONS:

AC Input Voltage .....	90~264Vac
Frequency .....	50 to 60Hz
Power Factor .....	100Vac/220Vac PF $\geq$ 0.9 at 85%~100% Load
Inrush Current .....	.230Vac .... Cold start ..... 20A max.
	After 400us <5A
Leakage Current .....	3.5mA max.

### OUTPUT SPECIFICATIONS:

Maximum Output Voltage .....	(note1) See Table.
Constant Current Accuracy .....	$\pm 5\%$ max.
Current Line Regulation .....	(note 2) $\pm 5\%$ max.
Current Load Regulation .....	(note 3) $\pm 5\%$ max.
Over Voltage Protection .....	Voltage Clamp by TVS
Short Circuit Protection .....	Constant Current with Auto Recovery
Start up time .....	100Vac ..... 1.6 second max.


### GENERAL SPECIFICATIONS:

Efficiency .....	See Table
Temperature Coefficient .....	$\pm 0.03\%/^{\circ}\text{C}$ (0~50°C)
Isolation voltage Input to output .....	3.75KVac
Input to Ground .....	1.5KVac
Isolation resistance Input to output .....	$10^8\Omega$
Operating Ambient Temperature .....	-20 ~ 500
Cooling .....	Natural Convection
Storage Temperature .....	-40 ~ 85°C
Operating Humidity .....	10%~80%RH Non-Condensing
Operating Altitude .....	Sea Level to 10000feet
Vibration .....	0~500Hz, 2G 60min./1cycle, period for 3hours, 3 axes
Shock .....	30g peak, half sine, 6 axes
MTBF, MIL-HDBK-217F (25°C) .....	200Khrs typ.

### Mechanical Specification


All Dimensions In mm

Tolerance Millimeters:x.x=  $\pm 0.5$ ,x.xx=  $\pm 0.25$

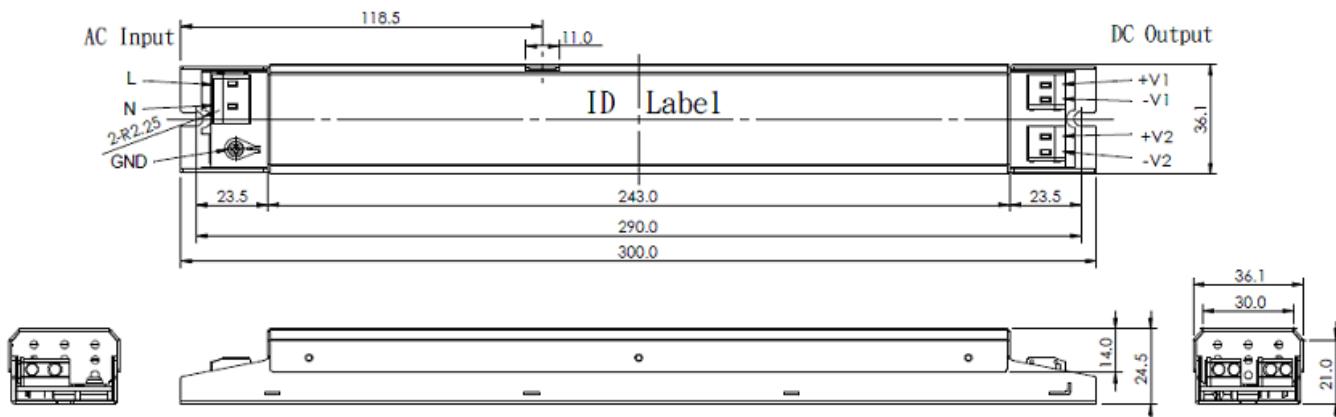

Input Connector: WAGO 235-502 2Pin or Equivalent  
Output Connector: WAGO 235-402 2Pin or Equivalent

### CLD50 Derating Curve

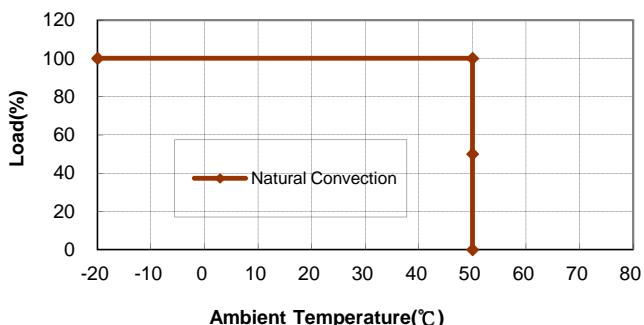

### SAFETY AND EMISSIONS:

Safety meet .....	UL8750, IEC/EN61347-1 IEC/EN61347-2-13
EMI .....	EN55022/EN55015 Class
EMS .....	EN61547, EN61000-4-2,3,4,5,6,8,11 EN61000-3-2 Harmonic
Dimensions .....	300x36.1x24.5 mm
Weight .....	230g
Case Material .....	Aluminum

### NOTE:

1. Output voltage is measured at no load.
2. Current line regulation is measured from high line to low line.
3. Current load regulation is measured from high to low operating voltage.

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for [LED Power Supplies](#) category:***

***Click to view products by [Cincon manufacturer](#):***

Other Similar products are found below :

[ESS015W-1000-12](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [79534](#) [79535](#)  
[EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [ESM060W-1400-42](#)  
[PDA080B-1A0G](#) [ESS010W-0500-12](#) [PDA150B-S1A5G](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [EUD-150S350DVA](#) [LWA320-C420-](#)  
[ARK-B](#) [HVG-240-48AB](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [ELG-240-C1400AB](#) [EUK-150S105DV](#) [BXCS-12Z-N2P-B1-A](#) [BXPR-WN-01-A](#)  
[LN1224CV](#) [BXCS-12D-N2P-01-A](#) [BXCS-12W-N2P-01-A](#) [HBG-160-24AB](#) [980100001200394](#) [980060001200376](#) [LC 14W 250-350MA](#)  
[FLEXC R ADV2](#) [LC 24W 500-600MA](#) [FLEXC R ADV2](#) [LC 36W 850-900MA](#) [FLEXC R ADV2](#) [LC 50W 200-350ML](#) [170V FLEXC LP](#)  
[SNC4](#) [LC 25W 200-350ML](#) [70V FLEXC LP](#) [SNC4](#) [LC 35W 200-350ML](#) [121V FLEXC LP](#) [SNC4](#) [LCBI 10W 350MA](#) [PHASE-CUT/1-10V LP](#)  
[LC 13W 300MA](#) [FIXC C SNC](#) [LC 10W 250MA](#) [FIXC SC SNC2](#) [LC 35W 800MA](#) [FIXC SR ADV2](#) [LC 38W 900MA](#) [FIXC SR ADV2](#) [LC](#)  
[34W 800MA](#) [FIXC SC ADV2](#) [LC 44W 1050MA](#) [FIXC SC ADV2](#) [LC 38W 900MA](#) [42V FIXC SRL ADV2](#)