



CQB100W14 SERIES 100 WATT 14:1 INPUT ISOLATED DC-DC CONVERTER

Features

- 100W Isolated Output
- Efficiency up to 90%
- Fixed Switching Frequency
- 14:1 Input Range
- Regulated Outputs
- Remote On/Off
- Low No Load Power Consumption
- Fully protected (OTP/OCP/OVP/UVLO)
- 3000Vac I/O Isolation
- Operating Case Temperature -40 to +105°C
- Quarter Brick Size Meet Industrial Standard 2.28"x1.45"x0.5"
- CB Test Certificate IEC62368-1
- EN55032/EN55035/EN50155 Compliant with External Circuits
- UL62368-1 2nd (Reinforce Insulation) Approval
- Shock & Vibration EN50155 (EN61373) Compliant
- Fire & Smoke EN45545-2 Compliant
- 5000m Operating Altitude
- Option Model with Bus & External UVLO Function



MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		% EFF.		CAPACITOR LOAD MAX.
			MIN.	MAX.	NO LOAD	FULL LOAD	(1)	(2)	
CQB100W14-72S05	12-160 VDC	5 VDC	0 mA	20000 mA	20 mA	1587 mA	87.5	87	20000uF
CQB100W14-72S12	12-160 VDC	12 VDC	0 mA	8300 mA	20 mA	1572 mA	88	87	8300uF
CQB100W14-72S15	12-160 VDC	15 VDC	0 mA	6700 mA	20 mA	1568 mA	89	88.5	6700uF
CQB100W14-72S24	12-160 VDC	24 VDC	0 mA	4200 mA	15 mA	1573 mA	89	88.5	4200µF
CQB100W14-72S28	12-160 VDC	28 VDC	0 mA	3600 mA	15 mA	1555 mA	90	89	3600µF
CQB100W14-72S54	12-160 VDC	54 VDC	0 mA	1850 mA	20 mA	1542 mA	90	89	1000µF

NOTE:

1. Nominal Input Voltage 72VDC.
2. Measured at Input Voltage 110VDC.
3. An External Input Capacitor 220uF for All Models are Recommended to Reduce Input Ripple Voltage.

PART NUMBER

Series	Nominal Input Voltage	Number of Outputs	Nominal Output Voltage	Remote On/Off Logic	Mounting Inserts
CQB100W14-	II	O	XX	L	-Y (Option)
CQB100W14	72 : 72 VDC	S : Single	05 : 05VDC 12 : 12VDC 15 : 15VDC 24 : 24VDC 28 : 28VDC 54 : 54VDC	None : Positive N : Negative	None : M3x0.5 Mounting Inserts -C : Clear Mounting Insert (3.2mm DIA.) -B : With Bus & External UVLO Function -C-B : Clear Mounting Insert (3.2mm DIA.) and with Bus & External UVLO Function

Part Number Example:

CQB100W14-72S12N-C: Quarter Brick, 100W, 14:1 12-160Vdc Input, Single 12Vdc Output, Negative Logic, Clear Mounting Insert



CQB100W14 Series

TECHNICAL SPECIFICATIONS

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

ABSOLUTE MAXIMUM RATINGS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input Voltage	Continuous	All	-0.3		160	V _{dc}
Input Surge Voltage	100ms max.	All			185	V _{dc}
Operating Case Temperature	At the center part of case plate	All	-40		105	°C
Storage Temperature		All	-55		125	°C

INPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Operating Input Voltage		All	12	72	160	V _{dc}
Input Under Voltage Lockout						
Turn-On Voltage Threshold	80% Load	All	10.7	11	11.7	V _{dc}
Turn-Off Voltage Threshold	80% Load	All	9.7	10	10.7	V _{dc}
Lockout Hysteresis Voltage	80% Load	All		1.0		V _{dc}
Maximum Input Current	V _{in} =16V, Full load	All			8.0	A
	V _{in} =12V, 80% Load					
No-Load Input Current	V _{in} =72V, I _o =0A	See Model Number Table				mA
Input Filter	Pi filter	All				
Inrush Current (I ² t)	As per ETS300 132-2.	All			0.1	A ² s
Input Reflected Ripple Current	P-P thru 12uH inductor, 5Hz to 20MHz	All		30		mA

OUTPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Voltage Set Point Accuracy	V _{in} =72V, Full load, T _c =25°C	All	-1.0		+1.0	%
Output Voltage Regulation						
Load Regulation	Full load to no load	All			±0.2	%
Line Regulation	V _{in} =High line to low line, full load	All			±0.2	%
Temperature Coefficient	T _c =-40°C to 105°C	All			±0.02	%/°C
Output Voltage Ripple and Noise (5Hz to 20MHz Bandwidth)						
Peak-to-Peak	Full load, 10uF polymer tantalum and 1uF ceramic capacitors.	5V _o			150	mV
		12V _o			150	
		15V _o			150	
		24V _o			240	
		28V _o			240	
		54V _o			480	
RMS.		5V _o			80	mV
		12V _o			80	
		15V _o			80	
		24V _o			120	
		28V _o			120	
		54V _o			220	
Output Current Range	V _{in} = 12 to 16V V _{in} = 16 to 160V	See Power Derating Curve See Model Number Table				A
Over Current Protection	Hiccup mode. Auto recovery	All	110	150	180	%
Short Circuit Protection		All	Continuous, Auto Recovery.			
External Load Capacitance	Full load (resistive)	See Model Number Table				uF
Output Voltage Trim Range	P _o ≤ max rated power, I _o ≤ I _{o_max}	Others	-20		+15	%
		54V _o	-20		+10	



CQB100W14 Series

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Output Voltage Remote Sense Range	$P_o \leq \text{max rated power}$, $I_o \leq I_{o_max}$ % of nominal V_o	Others 54Vo			+15 +10	%
Over Voltage Protection	Limited Voltage, % of Nominal V_o	Others 54Vo	117 112	125 117	140 140	%
Bus Pin Output Voltage	$V_{in} = 24$ to $160V$, $T_c = 25^\circ C$	-B Only		24	26	V_{dc}

EFFICIENCY

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
100% Load	$V_{in} = 72V$, $110V$		See Model Number Table			%

DYNAMIC CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Output Voltage Current Transient						
Error Band	75% to 100% of I_{o_max} step load change $dI/dt = 0.1A/us$ (within 1% V_{out} nominal)	All			± 5	%
Recovery Time		All			250	us
Turn-On Delay and Rise Time						
Full load (Constant resistive load)						
Turn-On Delay Time, From On/Off Control	$V_{on/off}$ to 10% V_{o_set} , Remote on	All		50		ms
Turn-On Delay Time, From Input	V_{in_min} to 10% V_{o_set} , Power up	All		50		ms
Output Voltage Rise Time	10% V_{o_set} to 90% V_{o_set}	All		50		ms

ISOLATION CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Isolation Voltage (100% factory Hi-Pot tested @2 sec.)	1 Minute; input to output	All			3000 4200	V_{ac} V_{dc}
	1 Minute; input to case (base plate)	All			2100 3000	V_{ac} V_{dc}
	1 Minute; Output to case (base plate)	All			1500 2100	V_{ac} V_{dc}
Isolation Resistance	Input to output	All	100			$M\Omega$
Isolation Capacitance	Input to output	All		1000		pF

FEATURE CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Switching Frequency	Output ripple frequency	All	180	200	220	KHz
On/Off Control, Positive Remote On/Off logic, Refer to $-V_{in}$ pin.						
Logic Low (Module Off)	$V_{on/off}$ at $I_{on/off} = 1.0mA$	All	0		1.2	V
Logic High (Module On)	$V_{on/off}$ at $I_{on/off} = 0.0uA$, Pin open=On	All	3.5 or Open Circuit		160	V
On/Off Control, Negative Remote On/Off logic, Refer to $-V_{in}$ pin						
Logic High (Module Off)	$V_{on/off}$ at $I_{on/off} = 0.0uA$, Pin open=Off	All	3.5 or Open Circuit		160	V
Logic Low (Module On)	$V_{on/off}$ at $I_{on/off} = 1.0mA$	All	0		1.2	V
On/Off Current (for both remote on/off logic)	$I_{on/off}$ at $V_{on/off} = 0V$	All		0.4	1	mA
Leakage Current (for both remote on/off logic)	Logic high, $V_{on/off} = 15V$	All			30	uA
Off Converter Input Current	Shutdown input idle current	-B Others		6 4	12 10	mA
Over Temperature Shutdown	Temperature at the center part of case, non-latching	All		110		$^\circ C$
Over Temperature Recovery		All		100		$^\circ C$



CQB100W14 Series

GENERAL SPECIFICATIONS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
MTBF	I _o =100% of I _{o_max} ; MIL-HDBK - 217F_Notice 1, GB, 25°C	05Vo		570		K hours
		12Vo		690		
		15Vo		785		
		24Vo		840		
		28Vo		800		
		54Vo		850		
Weight		All		66		grams
Potting Material	UL 94V-0					
Case Material	Plastic, DAP, UL 94V-0					
Base plate Material	Aluminum Base Plate					
Shock/Vibration	MIL-STD-810F/EN61373 Compliant					
Humidity	95% RH max. Non Condensing					
Altitude	5000m Operating Altitude, 12000m Transport Altitude					
Thermal Shock	MIL-STD-810F					
Fire & Smoke	EN45545-2 Compliant					
EMI	Meets EN55032 & EN50155 Compliant (with external filter)					Class A
ESD	EN61000-4-2	Level 3: Air ±8kV, Contact ±6kV				Perf. Criteria A
Radiated immunity	EN61000-4-3	Level 3: 80~1000MHz, 20V/m				Perf. Criteria A
Fast Transient	EN61000-4-4	Level 3: On power input port, ±2kV, external input capacitor required (EN50155)				Perf. Criteria A
Surge	EN61000-4-5	Level 4: Line to earth, ±4kV, Line to line, ±2kV (EN50155)				Perf. Criteria A
Conducted immunity	EN61000-4-6	Level 3: 0.15~80MHz, 10V				Perf. Criteria A
Interruptions of Voltage Supply	EN50155	Class S3: 20ms interruptions				Perf. Criteria A
Supply Change Over	EN50155	Class C2: During a supply break of 30 ms				Perf. Criteria A
Application Note Link			CQB100W14-72S Series App Notes			
Packaging Information Link			Packaging Information			

Immunity to Environmental Conditions

Phenomenon	EN50155; 2017 Reference Clause(s)	Reference Standard	Test Conditions	Result
Low Temperature Start-up test	13.4.4	EN 60068-2-1	Class OT4 Temperature: -40°C Duration: 2 hrs	Pass
Dry Heat Test	13.4.5	EN 60068-2-2	Class OT4 & ST2 Temperature: 70°C Duration: 6 hrs Extended temperature: 85°C Extended Duration: 10min	Pass
Low Temperature Storage Test	13.4.6	EN 60068-2-1	Temperature: -40°C Duration: 16 hrs	Pass
Cyclic Damp Heat Test	13.4.7	EN 60068-2-30	Temperature: 25°C - 55°C Humidity: 90% RH Duration: 48 hrs	Pass
Random Vibration Test	13.4.11	EN 61373	Temperature: 25°C +/- 10°C Humidity: 50% +/-25% RH Frequency range: 5 ~ 150 Hz Vertical: 1.01 m/s ² Transverse: 0.450 m/s ² Longitudinal: 0.700 m/s ² Duration: 10 min / axis	Pass
Simulated Long Life Test at Increased Random Vibration Levels	13.4.11	EN 61373	Temperature: 25°C +/-10°C Humidity: 50% +/-25% RH Frequency range: 5 ~ 150 Hz Vertical: 5.72 m/s ² Transverse: 2.55 m/s ² Longitudinal: 3.96 m/s ² Duration: 5 hrs / axis	Pass



CQB100W14 Series

Phenomenon	EN50155; 2017 Reference Clause(s)	Reference Standard	Test Conditions	Result
Shock Test	13.4.11	EN 61373	Temperature: 25°C +/-10°C Humidity: 50% +/-25% RH Frequency range: 5 ~ 150 Hz +/-Vertical: 30 m/s ² +/-Transverse: 30 m/s ² +/-Longitudinal: 50 m/s ² Duration: 30ms x18 (Each axis 3 shocks)	Pass


EN45545-2 Fire & Smoke Test Conditions

Item		Standard	Hazard Level
R22	Oxygen Index Test	EN 45545-2: 2013 EN ISO 4589-2: 2006	HL1, HL2, HL3
	Smoke Density Test	EN 45545-2: 2013 EN ISO 5659-2: 2013	HL1, HL2, HL3
	Smoke Toxicity Test	EN 45545-2: 2013 NF X70-100: 2006	HL1, HL2, HL3
R23	Oxygen Index Test	EN 45545-2: 2013 EN ISO 4589-2: 2006	HL1, HL2, HL3
	Smoke Density Test	EN 45545-2: 2013 EN ISO 5659-2: 2013	HL1, HL2, HL3
	Smoke Toxicity Test	EN 45545-2: 2013 NF X70-100: 2006	HL1, HL2, HL3
R24	Oxygen Index Test	EN45545-2: 2013 EN ISO 4589-2	HL1, HL2, HL3
R25	Glow - Wire Test	EN 45545-2:2013 EN 60695-2-11:2001	HL1, HL2, HL3
R26	Vertical Flame Test	EN 45545-2: 2013 EN 60695-11-10: 2013	HL1, HL2, HL3


CHARACTERISTIC CURVE

Power Derating Curve


CQB100W14-72S05, 12 Derating Curve without Heatsink (Vin=72V)

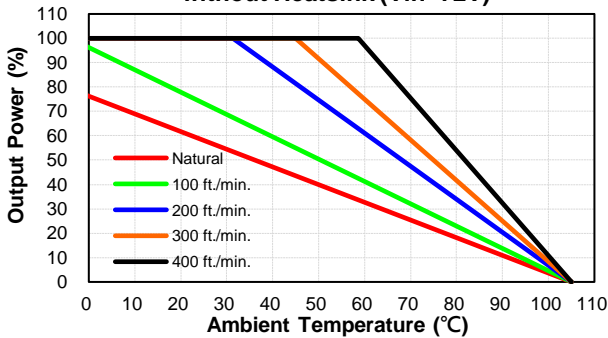

CQB100W14-72S05, 12 Derating Curve with Heatsink QBL127 (Vin=72V)

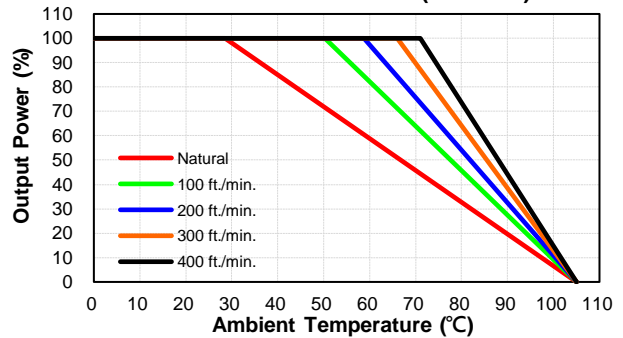


CQB100W14-72S05, 12 Derating Curve with Heatsink QBT210 (Vin=72V)

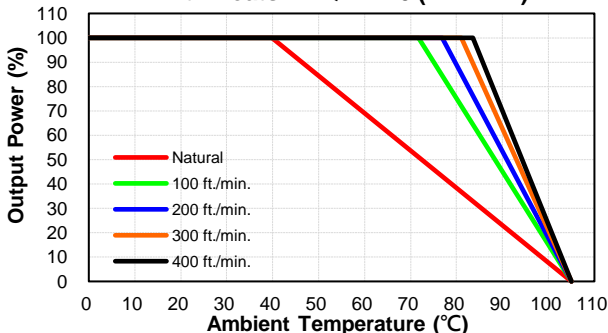




CQB100W14 Series


CQB100W14-72S15, 24, 28, 54 Derating Curve without Heatsink (Vin=72V)

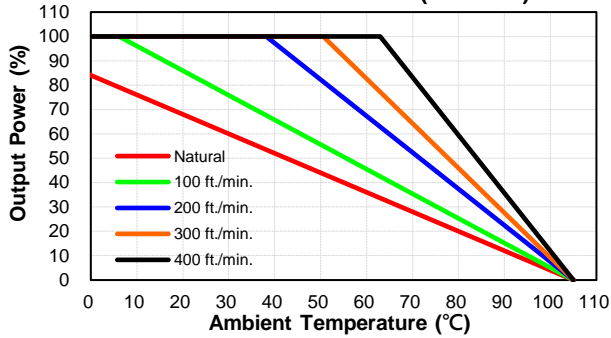


CQB100W14-72S15, 24, 28, 54 Derating Curve with Heatsink QBL127 (Vin=72V)

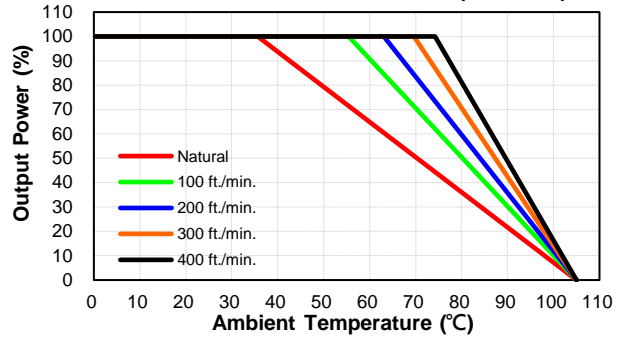

CQB100W14-72S15, 24, 28, 54 Derating Curve with Heatsink QBT210 (Vin=72V)

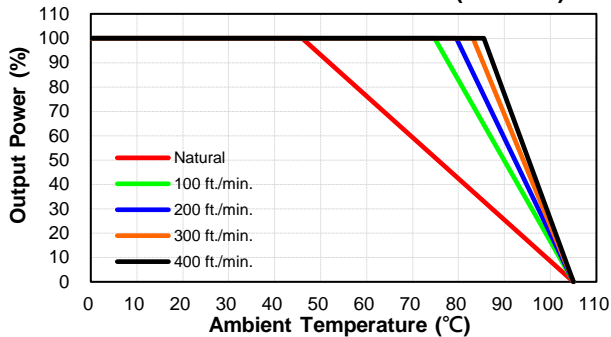


Typical Derating Curve VS Input Voltage

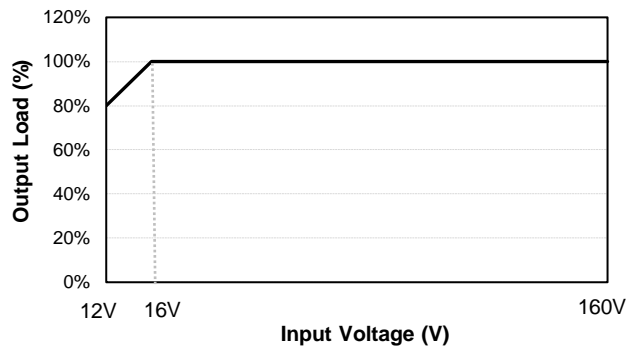


Performance Data


CQB100W14-72S05 Eff Vs Io @25 Deg. C

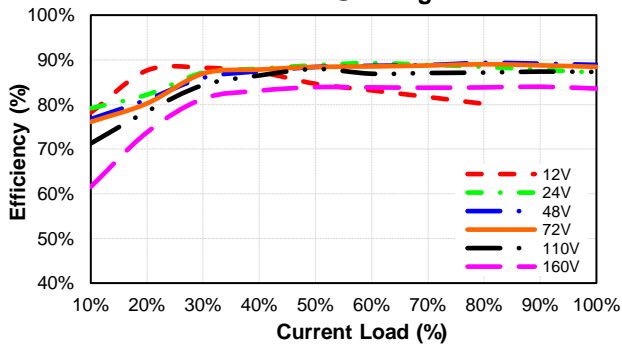


CQB100W14-72S05 Pd Vs Po @25 Deg. C

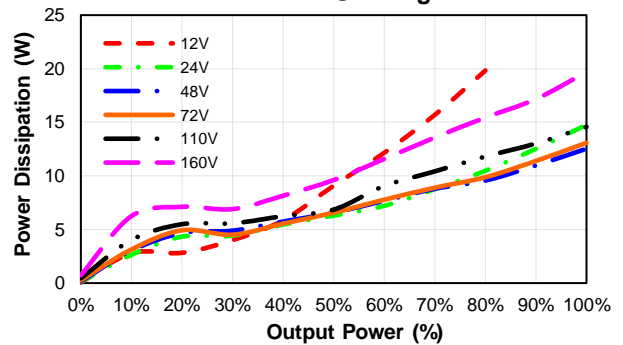

CQB100W14-72S12 Eff Vs Io @25 Deg. C

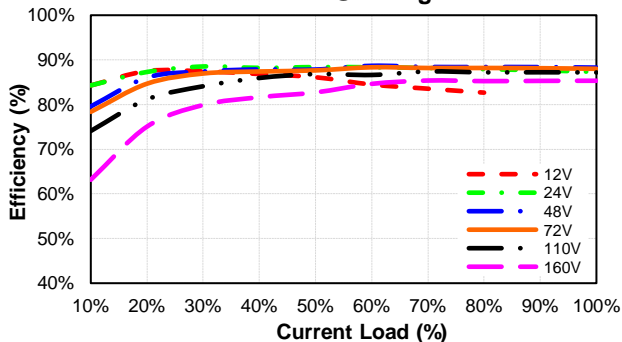


CQB100W14-72S12 Pd Vs Po @25 Deg. C

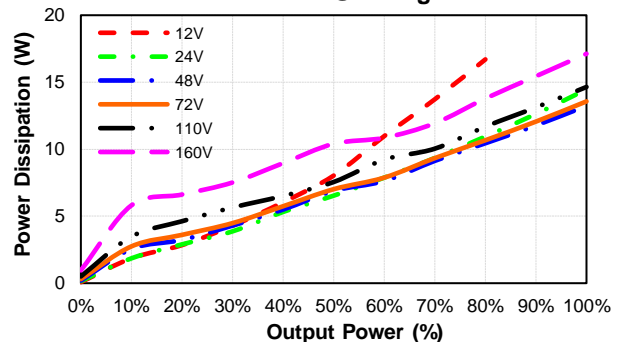




CQB100W14 Series


CQB100W14-72S15
Eff Vs Io @25 Deg. C

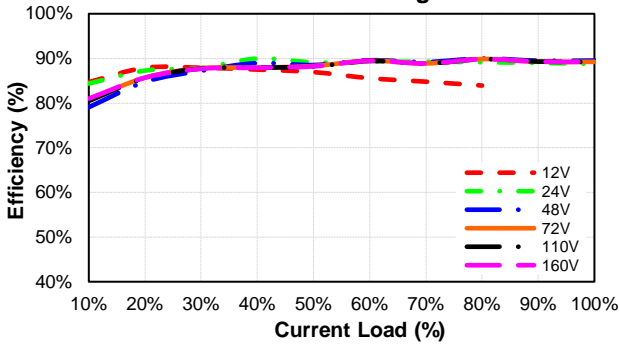


CQB100W14-72S15
Pd Vs Po @25 Deg. C

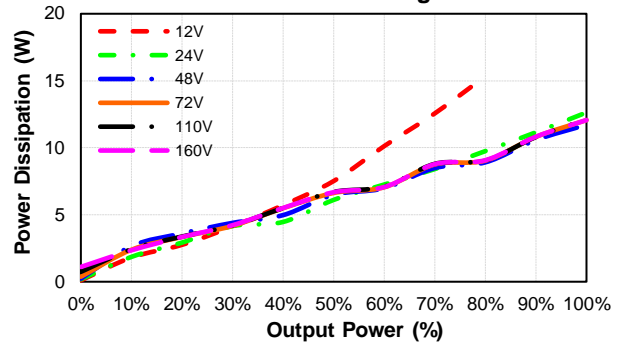


CQB100W14-72S24
Eff Vs Io @25 Deg. C

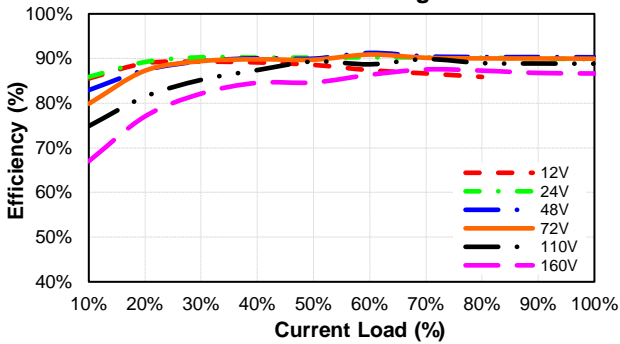


CQB100W14-72S24
Pd Vs Po @25 Deg. C

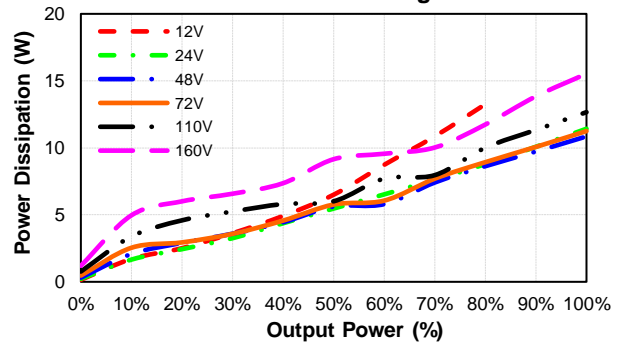


CQB100W14-72S28
Eff Vs Io @25 Deg. C

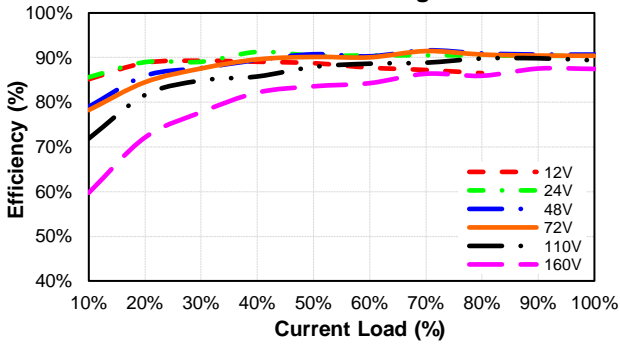


CQB100W14-72S28
Pd Vs Po @25 Deg. C

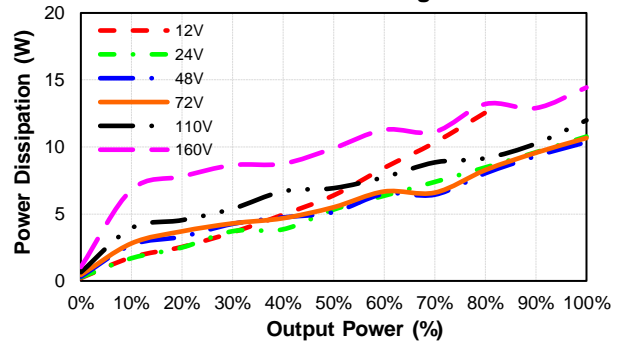

CQB100W14-72S54
Eff Vs Io @25 Deg. C

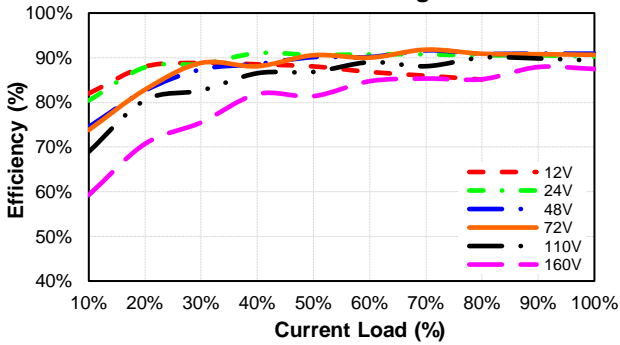


CQB100W14-72S54
Pd Vs Po @25 Deg. C

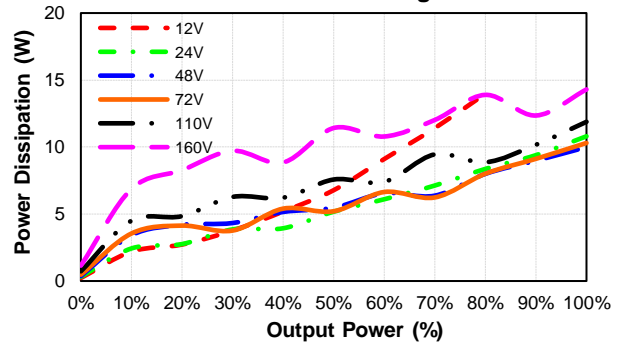




CQB100W14 Series


CQB100W14-72S05
Eff Vs Vin @25 Deg. C

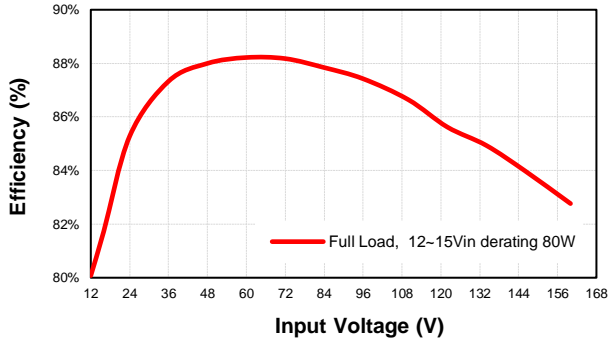


CQB100W14-72S12
Eff Vs Vin @25 Deg. C

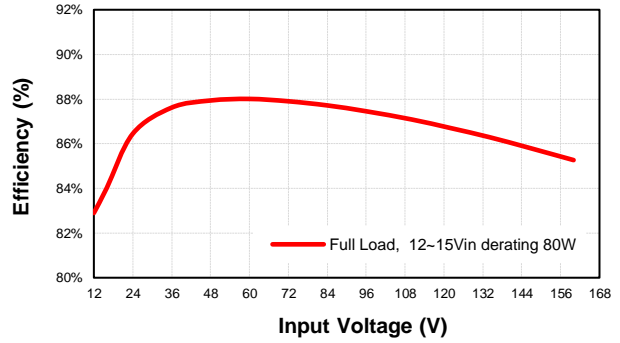


CQB100W14-72S15
Eff Vs Vin @25 Deg. C

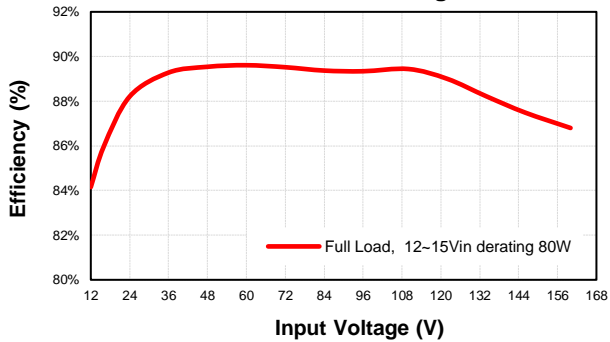


CQB100W14-72S24
Eff Vs Vin @25 Deg. C

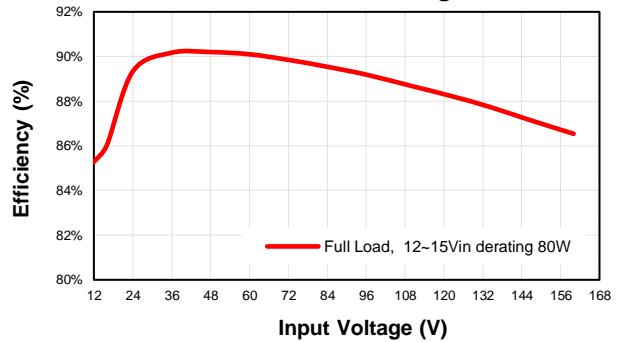

CQB100W14-72S28
Eff Vs Vin @25 Deg. C

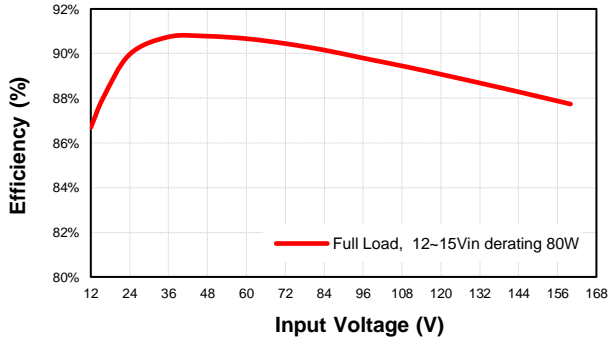

CQB100W14-72S54
Eff Vs Vin @25 Deg. C

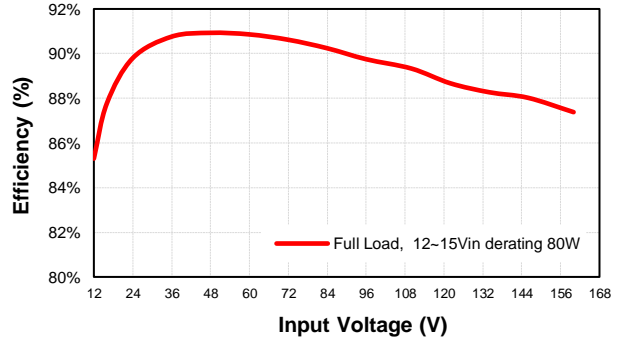


Note: 12Vin Efficiency at 80% Full Load



CQB100W14 Series

MECHANICAL SPECIFICATION

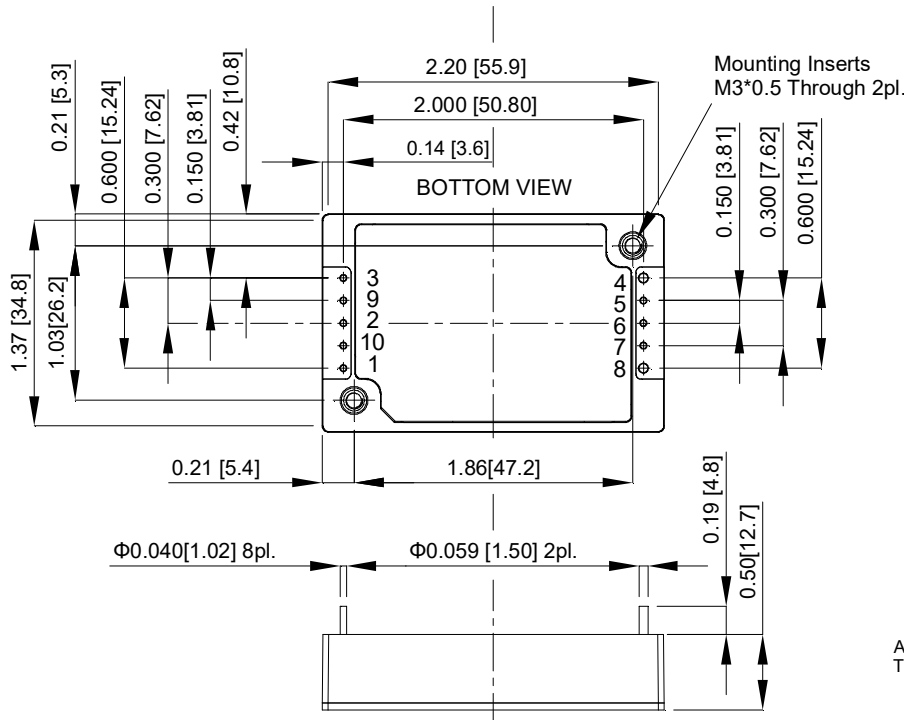

PIN CONNECTION		
PIN	STANDARD	OPTION -B
	Function	
1	+V Input	+V Input
2	On / Off	On / Off
3	-V Input	-V Input
4	-V Output	-V Output
5	-Sense	-Sense
6	Trim	Trim
7	+Sense	+Sense
8	+V Output	+V Output
9	NP	Bus(Optional)
10	NP	UVLO(Optional)

*NP-NO PIN

All Dimensions In Inches[mm]
 Tolerances Inches: X.XX= ±0.02 , X.XXX= ±0.010
 Millimeters: X.X= ±0.5 , X.XX=±0.25

CINCON Electronics Co. Ltd.
 Add: 14F, No. 306, Sec.4, Hsin Yi Rd., Taipei, Taiwan
 Tel: 886-2-27086210
 Fax: 886-2-27029852
 E-mail: sales@cincon.com.tw
 Web: www.cincon.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters - Through Hole](#) category:

Click to view products by [Cincon](#) manufacturer:

Other Similar products are found below :

[RSK-2405SRUW/H3](#) [CCG3-48-12SF](#) [CCG6-12-05SF](#) [RSOK-2405SZ/H3](#) [CQB100W14-72S15](#) [TRI 1-2413](#) [CCG6-24-15DF](#) [TRI 1-1211SM](#)
[CCG6-24-12DF](#) [RYK-053.3S/H](#) [MGJ2D241802BSC](#) [MGJ2D122003BSC](#) [EC4BE13](#) [PXD40-24WD15](#) [CCG1R5-12-03SF](#)
[MGJ2D242005BSC](#) [TRI 1-2412SM](#) [TRI 1-1212](#) [MGJ1D241802SC](#) [EC5DAW-48S12N](#) [RP06-11005SRAW](#) [TRI 1-1213](#) [TRI 1-1211](#) [R2M-](#)
[2412D](#) [PXD40-24WD12](#) [MGJ1D120603SC](#) [CCG10-24-15DF](#) [MGJ2D241505BSC](#) [EC5DAW-24D15N](#) [TRI 1-1212SM](#) [CCG1R5-24-05SF](#)
[CCG10-48-03SF](#) [PXD60-48WD24](#) [CQB100W14-72S15N](#) [MGJ1D121505SC](#) [CCG6-24-03SF](#) [RP10-11012SRAW](#) [MGJ1D122005SC](#)
[MGJ2D151802BSC](#) [RP03-11012SRAW](#) [EC5DAW-24S15N](#) [RPA40-11024SFR](#) [PXD40-48WS3P3](#) [PXD40-24WS12](#) [NMR1S0505SC](#)
[CCG1R5-48-03SF](#) [EC5DAW-24D12N](#) [CCG3-48-05SF](#) [CCG6-48-12SF](#) [CCG10-24-15SF](#)