



EC4AW SERIES

3.3-6 WATT 4:1 INPUT RANGE DC-DC CONVERTERS



FEATURES

- * 3.3-6W Isolated Output
- * DIP-24/SMD Package
- * Efficiency to 83%
- * 4:1 Input Range
- * Regulated Outputs
- * Pi Input Filter
- * Continuous Short Circuit Protection
- * Without Tantalum Capacitor Inside
- * Safety Meets IEC/EN/UL 62368-1



MODEL NUMBER ⁽¹⁾	INPUT VOLTAGE ⁽²⁾	OUTPUT VOLTAGE	OUTPUT CURRENT	INPUT CURRENT		% EFF.		CAPACITOR LOAD MAX.
				NO LOAD	FULL LOAD	(3)	(4)	
EC4AW01□	9-36 VDC	5 VDC	1000 mA	5 mA	254 mA	84	82	1000uF
EC4AW02□	9-36 VDC	12 VDC	470 mA	5 mA	283 mA	85	83	470uF
EC4AW03□	9-36 VDC	15 VDC	400 mA	5 mA	301 mA	85	83	400uF
EC4AW04□	9-36 VDC	±12 VDC	±230 mA	7.5 mA	280 mA	85	82	230uF
EC4AW05□	9-36 VDC	±15 VDC	±190 mA	7.5 mA	293 mA	85	81	190uF
EC4AW06□	9-36 VDC	±5 VDC	±500 mA	5 mA	251 mA	85	83	500uF
EC4AW07□	9-36 VDC	3.3 VDC	1000 mA	5 mA	176 mA	80	78	1000uF
EC4AW11□	18-72 VDC	5 VDC	1000 mA	5 mA	132 mA	83	79	1000uF
EC4AW12□	18-72 VDC	12 VDC	470 mA	5 mA	143 mA	86	82	470uF
EC4AW13□	18-72 VDC	15 VDC	400 mA	5 mA	154 mA	86	81	400uF
EC4AW14□	18-72 VDC	±12 VDC	±230 mA	7.5 mA	143 mA	85	80	230uF
EC4AW15□	18-72 VDC	±15 VDC	±190 mA	7.5 mA	148 mA	85	80	190uF
EC4AW16□	18-72 VDC	±5 VDC	±500 mA	5 mA	130 mA	84	80	500uF
EC4AW17□	18-72 VDC	3.3 VDC	1000 mA	5 mA	93 mA	79	74	1000uF

NOTE:

1. □ Can be None, H, HM or HMS.
2. Nominal Input Voltage: 24 or 48 VDC.
3. Measured at 12VDC for 24Vin, 24VDC for 48Vin.
4. Measured at Nominal Input Voltage.

SPECIFICATIONS

All Specifications Typical at Nominal Line, Full Load, and 25°C Unless Otherwise Noted

INPUT SPECIFICATIONS:

Input Voltage Range 24V 9-36V
 48V 18-72V
 Input Filter Pi Type

OUTPUT SPECIFICATIONS:

Voltage Accuracy ±2.0% max.
 Voltage Balance (Dual) ±1.0% max.
 Temperature Coefficient ±0.05%/°C max.
 Ripple & Noise, 20MHz BW 100mV pk-pk max.
 Short Circuit Protection Continuous
 Line Regulation Single/Dual (note1) ±0.5% max.
 Load Regulation Single (note2) ±0.5% max.
 Dual (note3) ±1.0% max.
 Start up time 30 ms typ.

GENERAL SPECIFICATIONS:

Efficiency See Table
 Isolation Resistance 10⁹ Ohm min.
 Switching Frequency 200KHz min.
 Operating Ambient Temperature Range -40°C to +85°C
 De-rating, Above 71°C Linearly to Zero Power at 100°C
 Case Temperature 100°C max
 Cooling Natural Convection
 Storage Temperature Range -40°C to +100°C
 Dimensions DIP 1.25x0.80x0.40 inches (31.8x20.3x10.2 mm)
 SMD 1.25x0.80x0.45 inches (31.8x20.3x11.4 mm)
 Weight 12.5g

ISOLATION VOLTAGE:

1.5K VDC min. Standard or Suffix "HM" Models
 3K VDC min. (note4) Suffix "H" Models


CASE MATERIAL:

Standard Models Non-Conductive Black Plastic
 Suffix "HM" Models (note5) Black Coated Copper with Non-Conductive Base


NOTE:

1. Measured from high line to low line.
2. Measured from full load to 10% load.
3. Measured from full load to 1/4 load.
4. Non-conductive black plastic only.
5. Suffix "S" to the model number with SMD packages.
6. Maximum case temperature under any operating condition should not be exceeded 100°C

Typical Derating curve for Natural Convection

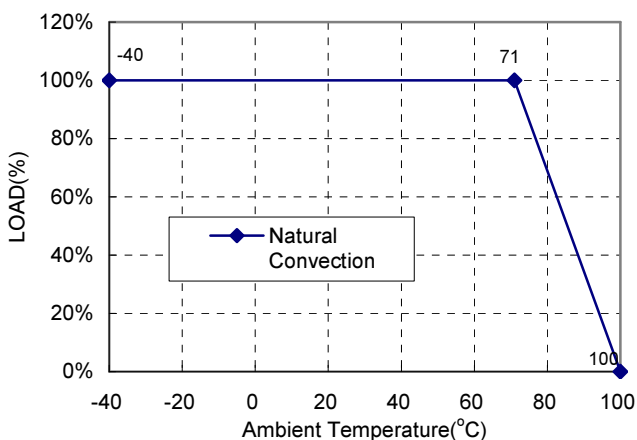


Case A Dimensions:

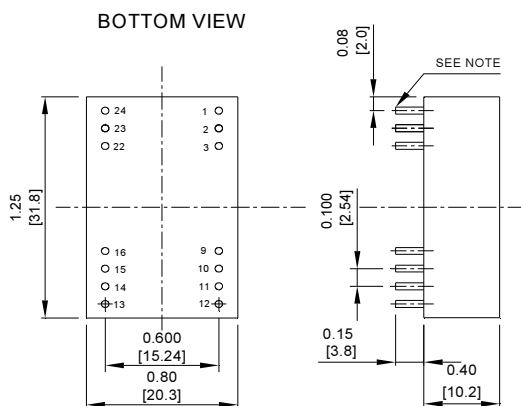

NOTE: Pin Size is 0.02±0.002 Inch (0.5±0.05 mm) DIA
 All Dimensions In Inches (mm)
 Tolerances Inches: X.XX= ±0.02 , X.XXX= ±0.010
 Millimeters: X.X= ±0.5 , X.XX=±0.25

CASE AS

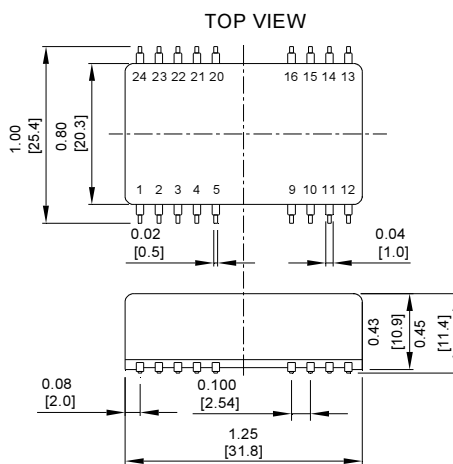

Pin	PIN CONNECTION			
	Single Output		Dual Output	
	DIP	SMD	DIP	SMD
1,24	NP	NC	NP	NC
2,3	-V Input		-V Input	
4,5	NP	NC	NP	NC
9	NC		Common	
10,15	NC		NC	
11	NC		-V Output	
12,13	NP	NC	NP	NC
14	+V Output		+V Output	
16	-V Output		Common	
20,21	NP	NC	NP	NC
22,23	+V Input		+V Input	

* NC-NO CONNECTION WITH PIN
 * NP-NO PIN

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [Cincon](#) manufacturer:

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#)
[CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-](#)
[2415](#) [XKS-1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#)
[XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-N61-CM](#) [VI-](#)
[R5022-EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#)