



LDP60 SERIES

60WATT OUTPUT

LED POWER SUPPLY



Features

- * 60W Single / Dual outputs
- * Universal AC input range 90~305Vac
- * Constant Current Design
- * Active PFC > 0.9
- * Low inrush current < 5A
- * Standby Power Consumption <0.5W
- * Low Profile with 25.2mm Height and Narrow 40mm Width
- * Low Frequency Flicker Design
- * Continuous Short Circuit Protection
- * Over Temperature Protection
- * IP 67 Rated
- * Fully Isolated Plastic Case
- * Dimming Function: DALI/PWM/1~10VDC/Potentiometer



MODEL	Output Rated Voltage	Constant Current Region	Ripple and Noise(Vp-p max)	Output Rated Current	No Load Output Voltage (max.)	Output Rated Power	%EFF (ηp)
LDP60A240-C250BR	24V	9-24Vdc	0.24V	2500mA	29Vdc	60.0W	85%
LDP60A240-C250B	24V	16-24Vdc	2.2V				88%
LDP60A240-C210BR	24V	9-24Vdc	0.24V	2100mA	29Vdc	50.4W	84%
LDP60A240-C210B	24V	16-24Vdc	2.2V				87%
LDP60A240-C175BR	24V	9-24Vdc	0.24V	1750mA	29Vdc	42.0W	84%
LDP60A240-C175B	24V	16-24Vdc	2.2V				86%
LDP60A360-C166BR	36V	9-36Vdc	0.36V	1666mA	43Vdc	60.0W	85%
LDP60A360-C166B	36V	24-36Vdc	2.7V				89%
LDP60A360-C140BR	36V	9-36Vdc	0.36V	1400mA	43Vdc	50.5W	84%
LDP60A360-C140B	36V	24-36Vdc	2.7V				88%
LDP60A480-C125BR	48V	9-48Vdc	0.48V	1250mA	56Vdc	60.0W	86%
LDP60A480-C125B	48V	32-48Vdc	4.8V				90%
LDP60A480-C105BR	48V	9-48Vdc	0.48V	1050mA	56Vdc	50.4W	85%
LDP60A480-C105B	48V	32-48Vdc	4.8V				89%
LDP60B240-C125BR	24V	9-24Vdc	0.24V	V1 1250mA V2 1250mA	29Vdc 29Vdc	30.0W 30.0W	85%
LDP60B240-C105BR	24V	9-24Vdc	0.24V	V1 1050mA V2 1050mA	29Vdc 29Vdc	25.2W 25.2W	84%
LDP60B360-C083BR	36V	9-36Vdc	0.36V	V1 833mA V2 833mA	43Vdc 43Vdc	30W 30W	85%
LDP60B360-C070BR	36V	9-36Vdc	0.36V	V1 700mA V2 700mA	43Vdc 43Vdc	25.2W 25.2W	84%
LDP60B480-C062BR	48V	9-48Vdc	0.48V	V1 625mA V2 625mA	56Vdc 56Vdc	30W 30W	87%

All specifications are Typical at nominal line, full load and 25°C unless otherwise noted

Order Information:

Series	Output(W)	O/P: Single/Dual	Output Voltage	Dimming Function	Rated Output Current	Input Voltage	Ripple Noise
LDP	60	X	XXX	X	XXX	B	X
		A : Single O/P with IP67	240 : 24V 360 : 36V 480 : 48V	C : No dimming D : DALI dimming P : PWM 1-10V, Potentiometer	24V 36V 48V	B : 100-277 Vac	R : 1% output ripple and noise or Blank : 10% output ripple and noise
		B : Dual O/P with IP67	240 : 24V 360 : 36V 480 : 48V		24V 36V 48V		
					250: 2500mA 210: 2100mA 175: 1750mA		
					166: 1666mA 140: 1400mA		
					125: 1250mA 105: 1050mA		
					125: 1250mA 105: 1050mA		
					082: 833mA 070: 700mA		
					062: 625mA		

Specifications

INPUT SPECIFICATIONS:

AC Input Voltage 90~305Vac
 Frequency 50/60Hz
 Power Factor PF ≥ 0.9 @ 115Vac/230Vac, 75%~100% Load
 Inrush Current <5A after 100us @240Vac, Cold Start @25°C Ta Cold Start
 Leakage Current 0.75mA max.
 Standby Power Consumption <0.5W (No Dimming)
 Input Current (Full Load) 0.69A/0.32A typ. @115Vac/230Vac

OUTPUT SPECIFICATIONS:

Maximum Output Voltage See Table.
 Constant Current Accuracy (note1) ±5% max.
 Current Line Regulation (note2) ±5% max.
 Current Load Regulation (note3) ±5% max.
 Over Voltage Protection TVS Clamp
 Short Circuit Protection Hiccup Mode, Auto Recovery
 Over Temperature Protection 105°C typ.

GENERAL SPECIFICATIONS:

Efficiency See Table.
 Temperature Coefficient ±0.05%/°C (0~50°C)
 Isolation Voltage, Input to Output 3.75KVac.
 Isolation Resistance, Input to Output 10⁹Ω min.
 Operating Ambient Temperature -40 ~ 70°C (See Derating Curve).
 Cooling Natural Convection.
 Storage Temperature -40 ~ 85°C.
 Operating Humidity 20%~95% RH Non-Condensing.
 Operating Altitude Sea Level to 3000m
 MTBF, MIL-HDBK-217F (25°C Ta) 200Khrs.



MECHANICAL CHARACTERISTICS:

Dimensions 10.315x1.575x0.992 Inches (262.00x40.00x25.20mm).
 Weight 530g.

SAFETY AND EMISSIONS:

Safety UL8750, IEC61347-1, IEC61347-2-13
 EMI FCC Part 15/EN55015 Class B
 EMS EN61547, EN61000-4-2, 3, 4, 5, 6, 8, 11
 EN61000-3-2 Harmonic Class C, EN61000-3-3

LDP60 Series Derating Curve

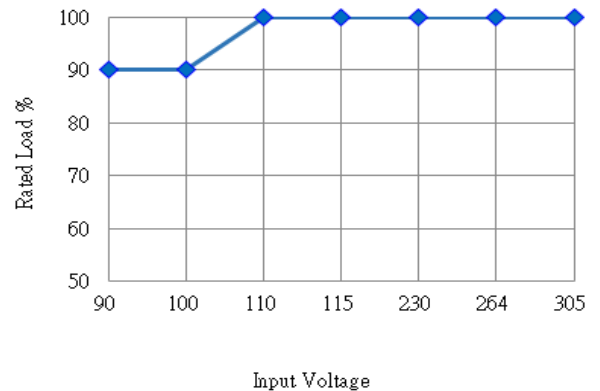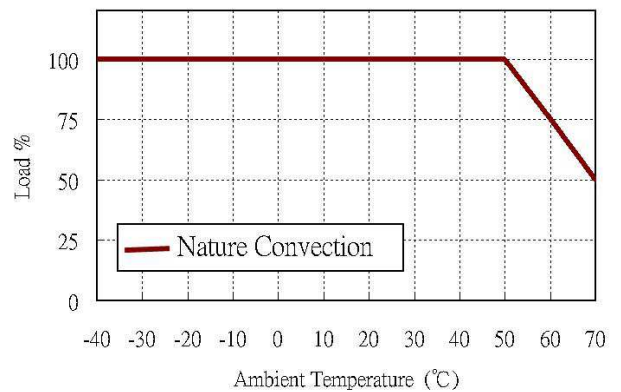

NOTE:


1. Current accuracy is set at nominal input voltage and full load.
2. Current line regulation is measured from high line to low line with full load.
3. Current Load regulation is measured minimum to maximum of the constant current region.
4. All specifications are typical at 230Vac, vo max., full load and 25°C unless other noted.
5. The input/output wires accessibility shall be evaluated during final system assembly.

All specifications are Typical at nominal line , full load and 25°C unless otherwise noted

Mechanical Specification


Single output

All Dimensions are in inches(mm)
 Tolerance:Inches:X.XXX±0.02
 Millimeters:X.XX±0.5
 UNIT : inches(mm)

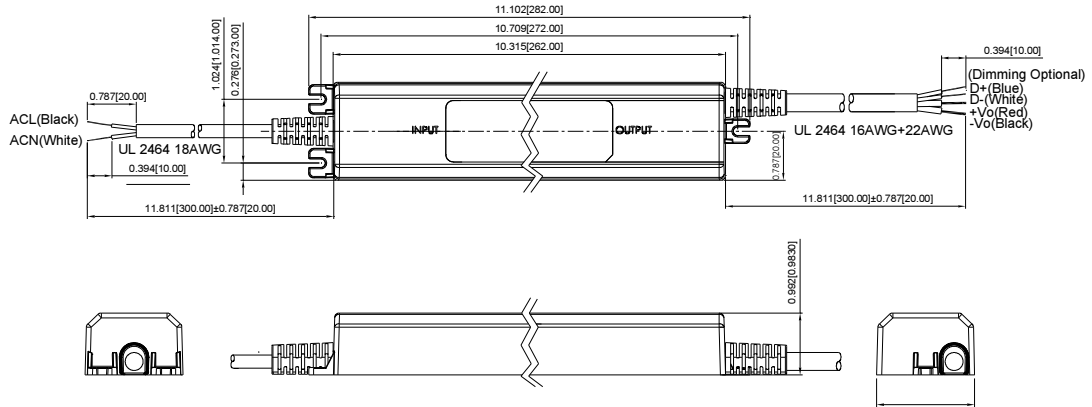

Dual Output

All Dimensions are in inches(mm)
 Tolerance:Inches:X.XXX±0.02
 Millimeters:X.XX±0.5
 UNIT : inches(mm)

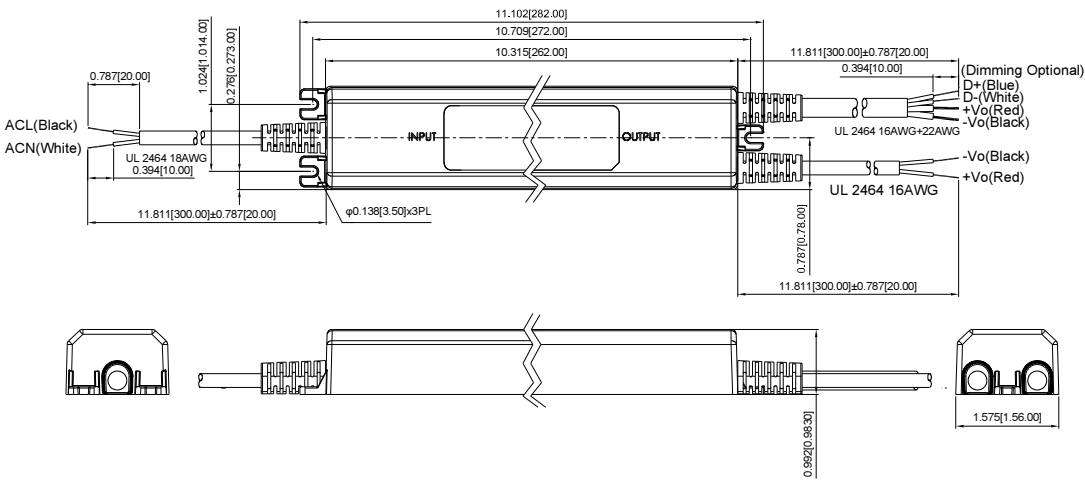

WIRE CONNECTION			
COLOR	NO DIMMING	PWM DIMMING	DALI DIMMING
BLUE	(N.A.)	D+	DA
WHITE	(N.A.)	D-	DA
RED	+VO	+VO	+VO
BLACK	-VO	-VO	-VO

All specifications are Typical at nominal line , full load and 25°C unless otherwise noted

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Power Supplies](#) category:

Click to view products by [Cincon](#) manufacturer:

Other Similar products are found below :

[ESS015W-1000-12](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [79534](#) [79535](#)
[EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [ESM060W-1400-42](#)
[PDA080B-1A0G](#) [ESS010W-0500-12](#) [PDA150B-S1A5G](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [EUD-150S350DVA](#) [LWA320-C420-](#)
[ARK-B](#) [HVG-240-48AB](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [ELG-240-C1400AB](#) [EUK-150S105DV](#) [BXCS-12Z-N2P-B1-A](#) [BXPR-WN-01-A](#)
[LN1224CV](#) [BXCS-12D-N2P-01-A](#) [BXCS-12W-N2P-01-A](#) [HBG-160-24AB](#) [980100001200394](#) [980060001200376](#) [LC 14W 250-350MA](#)
[FLEXC R ADV2](#) [LC 24W 500-600MA FLEXC R ADV2](#) [LC 36W 850-900MA FLEXC R ADV2](#) [LC 50W 200-350ML 170V FLEXC LP](#)
[SNC4](#) [LC 25W 200-350ML 70V FLEXC LP SNC4](#) [LC 35W 200-350ML 121V FLEXC LP SNC4](#) [LCBI 10W 350MA PHASE-CUT/1-10V LP](#)
[LC 13W 300MA FIXC C SNC](#) [LC 10W 250MA FIXC SC SNC2](#) [LC 35W 800MA FIXC SR ADV2](#) [LC 38W 900MA FIXC SR ADV2](#) [LC](#)
[34W 800MA FIXC SC ADV2](#) [LC 44W 1050MA FIXC SC ADV2](#) [LC 38W 900MA 42V FIXC SRL ADV2](#)