



TR30RDM SERIES

30W MEDICAL SWITCHING ADAPTER



Features

- * Universal Input Range 80~264VAC
- * Interchangeable AC Plugs
- * Approved EN55011, FCC CFR47 Part 18 Class B
- * Meets EN60335-1
- * Approved EN60601-1-11 for Home Healthcare Applications
- * Low Leakage Current <math>< 50\mu\text{A}</math>
- * Meets IP22
- * Continuous Short Circuit Protection
- * Over Voltage Protection
- * Meet CoC Tier 2 & DoE Level VI
(Output Cable Length $\leq 1800\text{mm}$)
(TR30RDM050: Output Cable Length $\leq 1220\text{mm}$)
- * No Load Power Consumption <math>< 75\text{mW}</math>
- * 2MOPP Class II



Ordering information

TR30RDMXXX	-XX	G	XX	-XX-BK
Model No.	DC Plug Type	UL1571 WITH OVP	DC Cable Length and Type	Color of Top Case
			01: 720mm	BK-BK : Black-Black
			02: 1220mm	BE-BK : Blue-Black
			03: 1800mm	RD-BK : Red-Black
			11: 720mm with Ferrite Core	
			12: 1220mm with Ferrite Core	
			13: 1800mm with Ferrite Core	
			* 16AWG / UL1571 or Equivalent for Vo: 5V, 9V	
			* 18AWG / UL1571 or Equivalent for Vo: 12V, 15V	
			* 22AWG / UL1571 or Equivalent for Vo: 18V, 24V	

MODEL	OUTPUT VOLTAGE	OUTPUT CURRENT	RIPPLE & NOISE NOTE 1	VOLTAGE ACCURACY NOTE 2	LINE REGULATION NOTE 3	LOAD REGULATION NOET 4	% EFF. (Typ.) NOTE 5
TR30RDM050	5V	5.0A	100mVp-p	$\pm 2\%$	$\pm 1\%$	$\pm 6\%$	84%
TR30RDM090	9V	3.3A	100mVp-p	$\pm 2\%$	$\pm 1\%$	$\pm 3\%$	88%
TR30RDM120	12V	2.5A	120mVp-p	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	88%
TR30RDM150	15V	2.0A	120mVp-p	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	88%
TR30RDM180	18V	1.67A	120mVp-p	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	88%
TR30RDM240	24V	1.25A	120mVp-p	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	88%

Specifications are subject to change without notice.

Specifications

INPUT SPECIFICATIONS:

Voltage 80~264Vac (see derating curve)
 Frequency 47 to 63Hz
 Input Current 0.8A max.
 Inrush Current Cold start@25°C 85A max. @240Vac
 Leakage Current 50uA max.

OUTPUT SPECIFICATIONS:

Hold-up Time 10ms typ. @115Vac
 Short Circuit Protection Hiccup Mode Continuous(Auto Recovery)
 Over Voltage Protection Latch

GENERAL SPECIFICATIONS:

Isolation Input to output 4000VAC
 Operating Temperature -25 ~ 70°C (see derating curve)
 Storage Temperature -25~85°C
 Humidity 93% RH max. Non condensing
 Cooling Natural Convection
 Switching Frequency 65KHz Typical
 MTBF MIL-HDBK-217F, GB, 25°C/115VAC 380Khrs min.
 Life time26280 hours min.@ 75% load, 40°C
 Altitude 5000m
 Dimensions 3.807x2.283x1.703 inches (96.70x58.00x43.25mm)
 Weight 200g(0.44 Pounds)

SAFETY AND EMC:



Emission and Immunity(Ed4.0) EN55011, EN60601-1-2
 EN61000-3-2, EN61000-3-3, IEC61000-4-2, 3, 4, 5, 6, 8, 11
 FCC CFR47 Part 18 Class B
 Safety (Ed3.1) IEC60601-1:2005+A1, EN60601-1-11
 EN60601-1:2006+A11:2011+A1+A12,
 ANSI/AAMI ES60601-1:2005/A1:2012

Mechanical Specification

All Dimensions are in inches[mm]
 Tolerance:Inches:X.XXX±0.02
 Millimeters:X.XX±0.5



TR30RDM Series Derating Curve

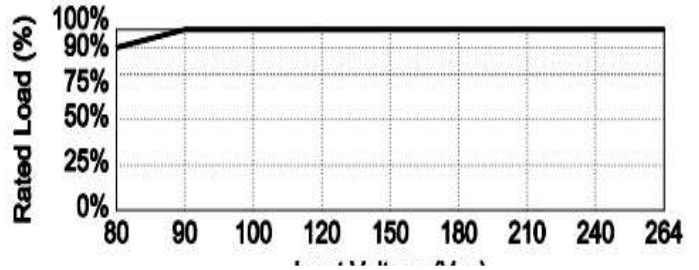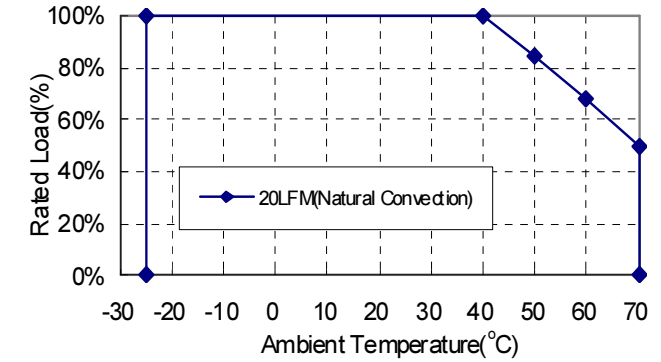

NOTE:

1. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to output for ripple & noise measuring @20MHz BW.
2. Voltage setpoint at 60% full load.
3. Line regulation is measured from 100Vac to 240Vac full load.
4. Load regulation is measured from 60% to full load and from 60% to 20% load (60% +/- 40% load).
5. Efficiency measured at 75% load and input voltage is 230Vac.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cincon](#) manufacturer:

Other Similar products are found below :

[EC2SA-24D05N](#) [EC3AE15M](#) [EC3AE35M](#) [EC4A25](#) [EC4AW05](#) [EC5BW-24S12](#) [EC5BW-48S12](#) [EC6A13](#) [EC6C21](#) [SIP10-12S33](#)
[CFB400W-48S12](#) [CFB400W-48S28](#) [CFM21S090-S](#) [CFM21S120-E](#) [CHB100W-48S12-CM](#) [CHB75W-48S12](#) [CHE100W-24S12-CM](#)
[CQE50W-48S24-DIN](#) [TRG10R059-11E03-Level-VI](#) [TRH100A240-01E13-Level-VI](#) [TRH50A120-40E01-Level-VI](#) [LDP25A240-C110BR](#)
[LDP60B480-C062BR](#) [EC4A21H-E](#) [EC5BU-24S05](#) [CFB600-300S24](#) [CFB700-48S28](#) [CFM100M180](#) [CFM351M240](#) [CFM60S090](#) [CHB100-24S24](#) [CHB100-48S12](#) [CHB100W-24S15-CM](#) [CHB300W-48S28](#) [CHB50-24S24](#) [TRG1505-E-11E03-Level-VI](#) [TRG1509-A-11E03-Level-VI](#)
[TRG1512-01-A-12E03-Level-VI](#) [TRG36A12-02E03-Level-VI](#) [EC6A17S](#) [EC4A02MS](#) [CFB600-24S32](#) [EC2SB-12D15](#) [EC4AW06HM](#)
[EC6A01S](#) [CFM21S090](#) [TRH70A120-23E11-Level-VI](#) [SMT16-12S05A](#) [EC3A25HM](#) [EC6C02](#)