



TR70M SERIES

70W MEDICAL SWITCHING ADAPTER



Features

- * Universal Input Range 80~264VAC
- * Meets EN55011 Class B and CISPR/FCC Class B
- * Continuous Short Circuit Protection
- * Over Voltage Protection
- * No Load Power Consumption <150mW
- * IEC/EN 60601-1-11 for TR70MB
- * Meets CoC Tier 2 & DoE Level VI
- * Meets IEC/EN60335-1
- * Meets 2 MOPP
- * Altitude 5000m
- * Class I (TR70MA) & Class II (TR70MB)
 - (TR70MA/B120: Output Cable Length \leq 1220mm 16AWG) (note7)
 - (TR70MA/B150: Output Cable Length \leq 1220mm 16AWG)
 - (TR70MA/B180: Output Cable Length \leq 1800mm 16AWG)
 - (Output Cable Length \leq 1800mm 18AWG)



Ordering information

TR70MXXXX	XX	X	XX
Model No.	DC Plug Type	OVP	DC Cable Length and Type
X: A or B		E: With OV	01: 720mm
A: CLASS I			02: 1220mm
B: CLASS II			03: 1800mm
			11: 720mm with Ferrite Core
			12: 1220mm with Ferrite Core
			13: 1800mm with Ferrite Core
			*18AWG/UL1185
			*16AWG/UL1185 for 12V

MODEL	OUTPUT VOLTAGE	OUTPUT CURRENT	RIPPLE & NOISE NOTE 2	VOLTAGE SETPOINT NOTE 1	LINE REGULATION NOTE 3	LOAD REGULATION NOTE 4	EFFICIENCY (Typ.) NOTE 5
TR70MA120	12V	5.8A	120mVp-p	$\pm 2\%$	$\pm 1\%$	$\pm 5\%$	89%
TR70MA150	15V	4.65A	150mVp-p	$\pm 2\%$	$\pm 1\%$	$\pm 3\%$	89%
TR70MA180	18V	3.9A	180mVp-p	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	89%
TR70MA240	24V	3.0A	240mVp-p	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	90%
TR70MA360	36V	1.9A	360mVp-p	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	90%
TR70MA480	48V	1.5A	480mVp-p	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	91%
TR70MB120	12V	5.8A	120mVp-p	$\pm 2\%$	$\pm 1\%$	$\pm 5\%$	89%
TR70MB150	15V	4.65A	150mVp-p	$\pm 2\%$	$\pm 1\%$	$\pm 3\%$	89%
TR70MB180	18V	3.9A	180mVp-p	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	89%
TR70MB240	24V	3.0A	240mVp-p	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	90%
TR70MB360	36V	1.9A	360mVp-p	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	90%
TR70MB480	48V	1.5A	480mVp-p	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	91%

Specifications are subject to change without notice.

Specifications

INPUT SPECIFICATIONS:

Voltage 80~264Vac(80Vac with derating curve)
 Frequency 47 to 63Hz
 Inrush Current Cold Start @25°C 100A max. @240Vac
 Conducted EMI CISPR/FCC Class B
 Leakage Current 90uA max.

OUTPUT SPECIFICATIONS:

Hold-up Time 10ms typ. @115Vac
 Short Circuit Protection Hiccup Mode (Auto Recovery)
 Over Voltage Protection IC Component to Clamp (Auto Recovery)
 Temperature Coefficient ±0.05%/°C max.


GENERAL SPECIFICATIONS:

Isolation Input to Output = 4,400VAC
 Operating Temperature -20 ~ 70°C (See Derating Curve, note6)
 Storage Temperature -40~85°C
 Humidity 93% RH max. Non Condensing
 Cooling Natural Convection
 Switching Frequency 65KHz Typical
 MTBF MIL-HDBK-217F, GB, at 25°C/115VAC 500Khrs min.
 Altitude 5000m
 Life Time Ambient 40°C 75% Load >3years
 AC Inlet IEC320/C14(TR70MA) / IEC320/C8(TR70MB)
 Dimensions 4.724x2.047x1.220 inches (120.00x52.00x31.00 mm)
 Weight 300g(0.66 Pounds)

SAFETY AND EMC:

Emissions and Immunity (Ed 4.0) EN55011 Class B, EN61000-3-2,3
 EN60601-1-2, IEC 61000-4-2, 3, 4, 5, 6, 8, 11
 Safety Approved (Ed.3.1) IEC/EN 60601-1, UL ANSI/AAMI ES60601-1
 IEC/EN 60601-1-11 for TR70MB

TR70M Series Derating Curve

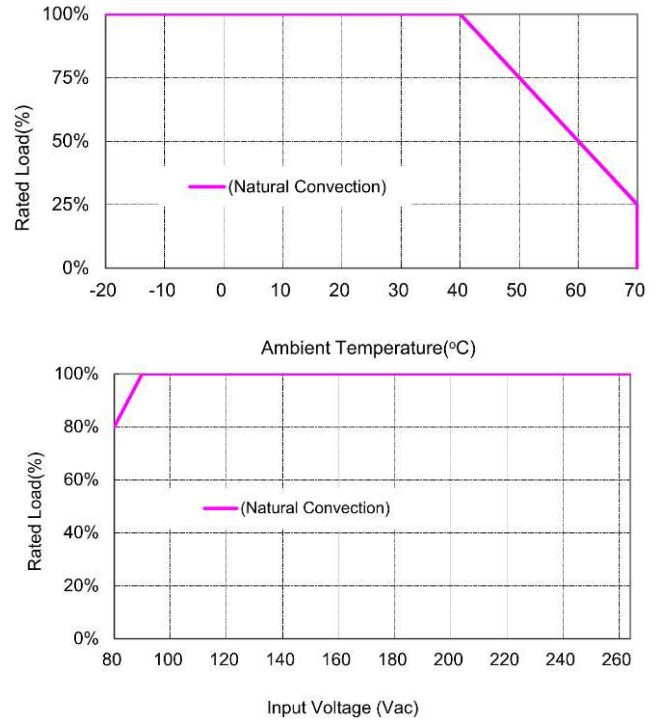


NOTE:

1. Voltage accuracy at 60% full load.
2. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to output for ripple&noise measurement @20MHz BW.
3. Line regulation is measured from 100Vac to 240Vac, full load.
4. Load regulation is measured from 60% to 100% full load and from 60% to 20% full load (60% +/- 40% full load).
5. Typical efficiency at 230VAC and 75% load at 25°C.
6. -30°C can be start-up at full load.
7. TR70MA120 & TR70MB120 of 115VAC full load meet DoE Level VI and 230VAC full load meet CoC Tier 2

Mechanical Specification


All Dimensions are in inches(mm)
 Tolerance:Inches:X.XXX±0.02
 Millimeters:X.XX±0.5
 UNIT:inches[mm]

TR70MAXXX Series


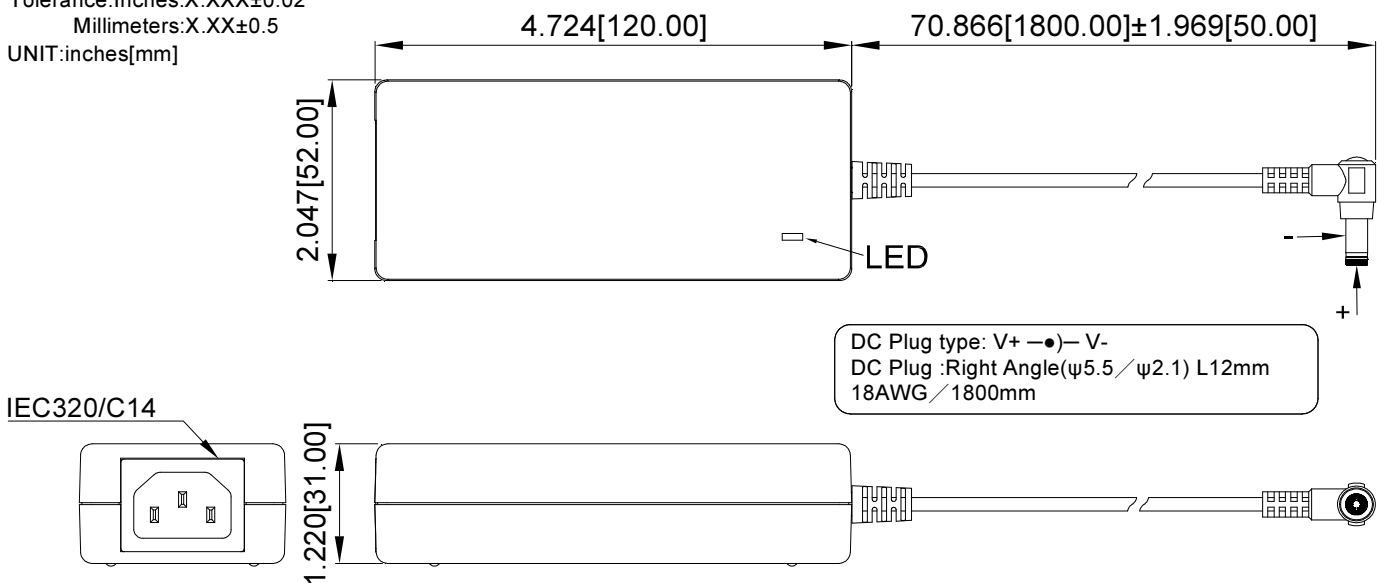


Mechanical Specification

TR70MBXXX Series

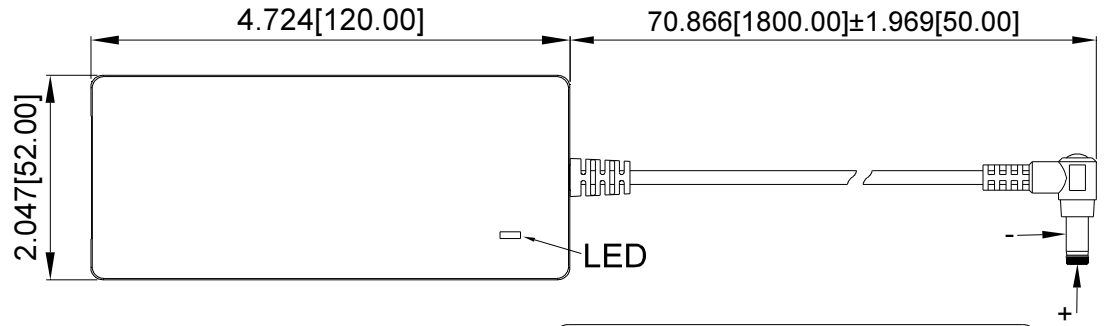

DC Plug type: V+ —●— V-
 DC Plug :Right Angle(ψ5.5/ψ2.1) L12mm
 18AWG/1800mm

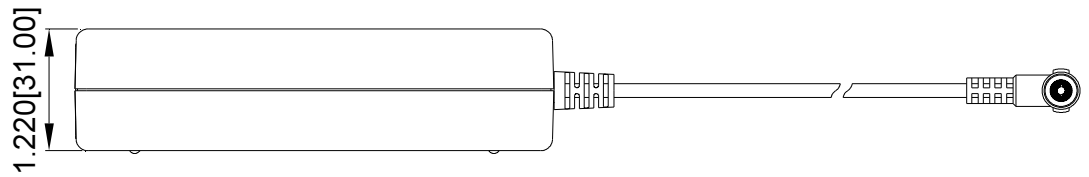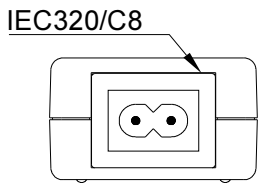

Typical at 25°C, nominal line and 75% load, unless otherwise Specified

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Desktop AC Adapters](#) category:

Click to view products by [Cincon](#) manufacturer:

Other Similar products are found below :

[212A2136](#) [ADP485-01](#) [SWA-1202](#) [SWA-1501](#) [212A2220](#) [432703037451](#) [KR8-PS01](#) [1894875](#) [FWE050024B-10A](#) [820A4080G](#) [825A0057-03](#) [SWA-1704W](#) [AD5012N2LM-\(401\)](#) [SDI65-24-UDC-P5R](#) [TRH21A120-49E03-Level-VI](#) [FWC100024A-11A](#) [FWE050012B-10A](#) [AC-DC ADAPTER 90W w/ Cable](#) [FWA065024A-11A](#) [PSA120U-560L6](#) [FWE050024A-10A](#) [96PSA-A63W18V1-M](#) [1895235](#) [PW-C0725-W2-B](#) [57-U1](#) [57-U2](#) [CENB1040A1245F02](#) [SED80N2-16.0](#) [SED80N3-16.0](#) [RFQ43442-01](#) [YS50-1903150](#) [50966124050E](#) [96PSA-A36W12R1-3](#) [PCM50UT04](#) [PCM50UT05](#) [Adapter 24V230W FSP230-AAAN3 WIRE FSP](#) [TRH100A240-11E12 VI](#) [TR70MB360-01E03 VI](#) [TRH50A240-11E01 VI](#) [TRE36A120-01G03 VI](#) [TRH100A180-11E12 VI](#) [POSC12250D-C8-WH](#) [POSC12300D-C8-WH](#) [POSC12500D-C8-WH](#) [SYS1588-3015-T2](#) [SYS1588-3018-T2](#) [SYS1588-3024-T2](#) [CPSUNOTAKY-07056](#) [CPSUNOTAKY-07058](#) [CPSUNOTAKY-07168](#)