



TRG30R V SERIES

30W SWITCHING ADAPTER



Features

- * Universal Input Range 90~264VAC
- * Interchangeable AC Plugs
- * Meets EN61204-3 Class B and CISPR/FCC Class B
- * Continuous Short Circuit Protection
- * Over Voltage Protection
- * Meet CoC Tier 2 & DoE Level VI
(Output Cable Length \leq 1800mm)
- * No Load Power Consumption < 75mW



Ordering information

TRG30RXXV	- XX	E	XX	-	XX	-BK
Model No.	DC Plug Type	DC Cable Length and Type	Color of Overmold Case			
		01: 720mm	BE: Blue			
		02: 1220mm	GY: Gray			
		03: 1800mm	RD: Red			
		11: 720mm with Ferrite Core	PE: Purple			
		12: 1220mm with Ferrite Core	OE: Orange			
		13: 1800mm with Ferrite Core				
		* 18AWG / UL1185				
		* 16AWG / UL1185 for Vo: 5V, 9V				

MODEL	OUTPUT VOLTAGE	OUTPUT CURRENT	RIPPLE & NOISE NOTE 1	VOLTAGE ACCURACY NOTE 2	LINE REGULATION NOTE 3	LOAD REGULATION NOTE 4	%EFF. (Typ.) NOTE 5
TRG30R050V	5V	4.0A	50mVp-p	±2%	±1%	±6%	83.69%
TRG30R090V	9V	3.0A	90mVp-p	±2%	±1%	±3%	87.30%
TRG30R120V	12V	2.5A	100mVp-p	±2%	±1%	±2%	87.70%
TRG30R150V	15V	2.0A	100mVp-p	±2%	±1%	±2%	87.70%
TRG30R180V	18V	1.67A	100mVp-p	±2%	±1%	±2%	87.70%
TRG30R240V	24V	1.25A	100mVp-p	±2%	±1%	±2%	87.70%

Specifications

INPUT SPECIFICATIONS:

Voltage	90~264Vac
Frequency	47 to 63Hz
Input Current	0.8A max.
Inrush Current	Cold start@25°C 100A max. @240Vac
Leakage Current	0.25mA max.

OUTPUT SPECIFICATIONS:

Hold-up Time	10ms typ. @115Vac
Short Circuit Protection	Hiccup Mode (Auto Recovery)
Over Voltage Protection	Latch

GENERAL SPECIFICATIONS:


Isolation	Input to output (4,242VDC)
Operating Temperature	-20 ~ 60°C (see Drating Curve)
Storage Temperature	-20~85°C
Humidity	93% RH max. Non condensing
Cooling	Natural Convection
Switching Frequency	70KHz Typical
MTBF	MIL-HDBK-217F, GB, 25°C/115VAC 200Khrs min.
Altitude	5000m
Dimensions	4.243x2.267x1.319 inches (107.77x57.60x33.50mm)
Weight	300g(0.66 Pounds)

SAFETY AND EMC:


Emission and Immunity	EN61204-3, EN61000-3-2, EN61000-3-3
	FCC CFR Title 47 Part 15 Subpart B
Safety	Class II, IEC60950-1, UL60950-1, EN60950-1

Mechanical Specification

All Dimensions are in inches(mm)
 Tolerance:Inches:X.XXX±0.02
 Millimeters:X.XX±0.5

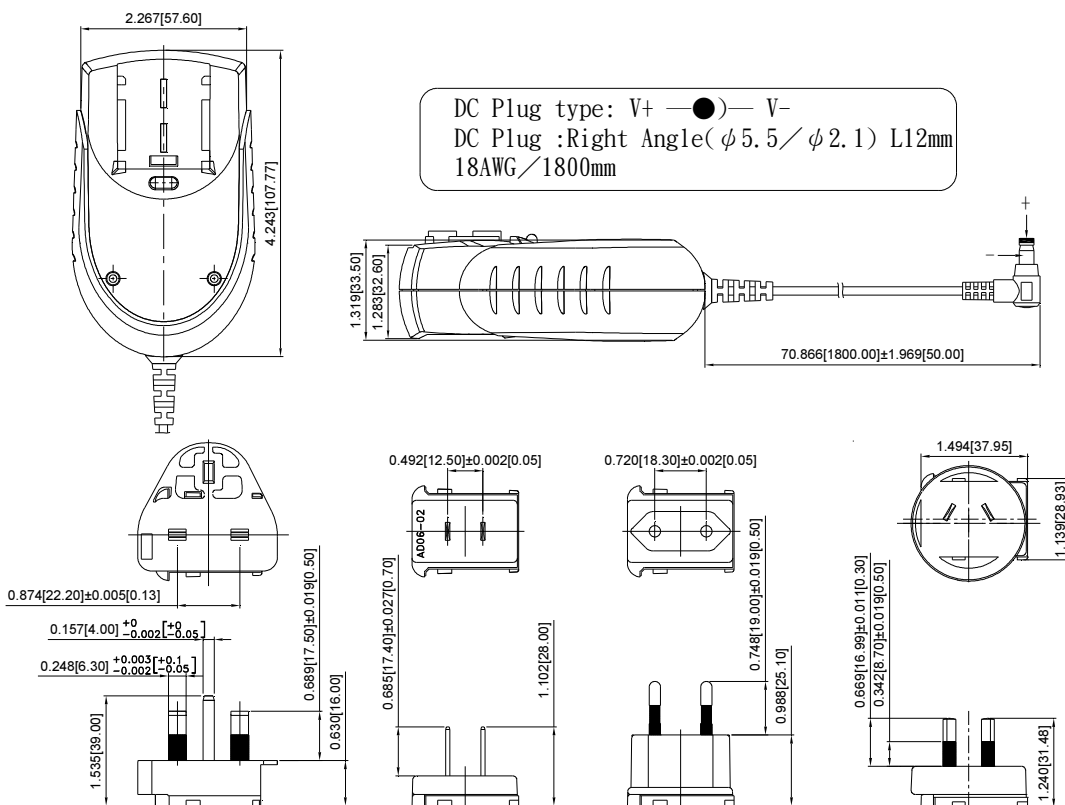

TRG30R-V Series Derating Curve

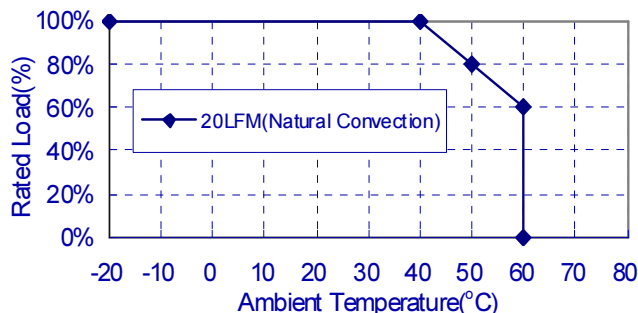

NOTE:

1. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to output for Ripple & Noise measuring @20MHz BW.
2. Voltage setpoint at 60% full load.
3. Line regulation is measured from 100Vac to 240Vac with full load.
4. Load regulation is measured from 60% to full load and from 60% to 20% load (60% +/- 40% load).
5. Average Efficiency measured at 25%,50%,75%,100% load and input voltage is 115Vac / 230Vac.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Wall Mount AC Adapters](#) category:

Click to view products by [Cincon](#) manufacturer:

Other Similar products are found below :

[ADP-163 E](#) [ADP-167 J](#) [ADP-168 K](#) [ADP-159 A](#) [ADP-165 G](#) [PSAC05A-050L6](#) [RLMDT361800](#) [DA10-050CH](#) [DA5-050US-B](#)
[RLMDT701800](#) [WSU120-2000-R13](#) [WSU180-1330-13](#) [AC-DC ADAPTER 160W](#) [WSU120-2000-13](#) [WSU150-0800-13](#) [WSU075-3200-13](#)
[WSU060-2000-R13](#) [WSU090-2500-13](#) [WSU050-2000-R13](#) [WSU240-1000-13](#) [WSU240-0500-R13](#) [WSU075-1500-13](#) [WSU050-3000-13](#)
[WSU120-1500-13](#) [WSU120-1500-R13](#) [WSU045-1500-13](#) [WSU240-0750-13](#) [WSU090-2500-R13](#) [WSU240-1500-13](#) [WSU180-0660-13](#)
[WSU075-1500-R13](#) [WSU090-1300-13](#) [WSU180-1330-R13](#) [BB-SMI1812VP230C1](#) [WSU050-1500-13](#) [WSU090-0800-13](#) [WSU120-0700-13](#)
[WSU045-3000-13](#) [WSU180-0450-13](#) [WSU150-0560-R13](#) [WSU135-0880-13](#) [WSU120-3000-13](#) [WSU120-1000-R13](#) [WSU090-1300-R13](#)
[WSU060-1250-R13](#) [WSU060-1250-13](#) [WSU045-2000-R13](#) [WSU045-1500-R13](#) [PSAC05A-050L6M](#) [392007-01](#)