


CGWMJ8-POE-C6



- UL497B LISTED
- Hybrid SAD-GDT technology
- Surge Rating - 16kA 8/20us
- Data transmission speed to 5Gbps
- IEEE 802.3bt POE++, UPoE to 90W
- IP66 Enclosure

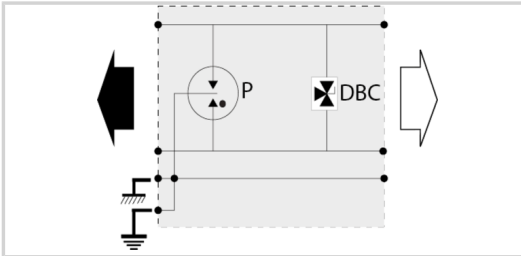

Electrical Characteristics		
VOLTS	(V)	48
AC/DC/DC PV/RF		DC
WIRES		8W+Shield+Ground
LINE CURRENT MAX	(A)	1.6
POWER RATING	(W)	95
AMBIENT MIN	(C)	-35
AMBIENT MAX	(C)	+85
MODES		DC+-DC-,DC+-G,DC--G,SH-G
RESIDUAL VOLTAGE	(V)	70
MCOV	(V)	60/72/72
IN(10 impulses 8/20µs)	(kA)	10.0000
IMAX(8/20µs)	(kA)	16
DATA SPEED	(bps)	10/100/1000/10000
Mechanical Characteristics		
TECHNOLOGY		SAD-GDT
NETWORK CONFIGURATION		Single POE Line
CONNECTION METHOD		Shielded RJ45
MOUNTING		FLANGE MOUNT/POLE MOUNT KIT
MATERIAL		Polycarbonate
FLAMMABILITY RATING		UL94-V0
NEMA RATING (IP RATING)		6 (IP66)
DIMENSIONS		See diagram (mm)
Standards		
UL CATEGORY		QVQG
UL FILE NUMBER		E184939
STANDARDS		NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS		ROHS
Part number		
<b>890191</b>		

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Surge Suppressors](#) category:*

*Click to view products by [Citel](#) manufacturer:*

Other Similar products are found below :

[GUS1](#) [GUS12](#) [BSPM1A600D600LVR](#) [2800521](#) [29-2053](#) [GUS11](#) [GUS2](#) [GUS3](#) [GUS4](#) [30460](#) [SRA64C060X](#) [PC642C015](#) [1810-15-A3](#)  
[2713175](#) [4B06B-EC1-150LF](#) [SRA6LC](#) [BPMA75D100LV](#) [CX06M](#) [CCTV1](#) [GUS13](#) [GUS14](#) [GUS5](#) [GUS6](#) [VAL-MS 320/3+0-FM](#) [VAL-US-](#)  
[120/40/1+1-FM](#) [VAL-US-120/65/1+1-FM](#) [VAL-US-480D/30/3+0-FM](#) [VAL-US-120/40/1+0-FM](#) [STCHSP121BT1RU](#) [LP-BFDN-CW](#) [LP-](#)  
[STRL-NFF](#) [LP-STRL-DFE](#) [GUS22](#) [0804111](#) [5053609](#) [5053201](#) [SPD2-150-1P0](#) [SPD2-550-1P0](#) [6720005416](#) [6720005417](#) [1-2191595-2](#)  
[STC-CAT6-P0E-I](#) [SPD2-350-1P0](#) [FLT-CP-350-ST](#) [TTC-6P-3-HF-F-M-12DC-UT-I](#) [SMTPA200](#) [2800989](#) [2906776](#) [2906810](#) [2906847](#)