



DS41S-480



- UL1449 TYPE 1 LISTED SPD
- MOV Technology
- 40kA Surge Current Rating
- Visual fault indicator and remote contacts
- 10-Year warranty

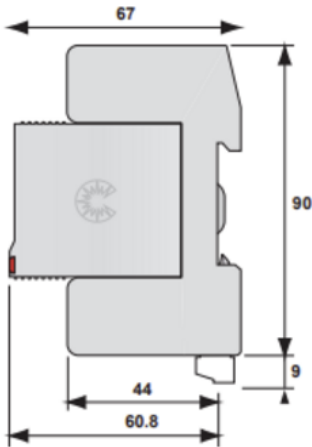

Electrical Characteristics		
POWER SPD TYPE		UL1449 TYPE 1 LISTED
VOLTS	(V)	480
AC/DC/DC PV/RF		AC
PHASE	(PH)	1
AMPS	(A)	n/a
AMBIENT MIN	(C)	-35
AMBIENT MAX	(C)	+60
MODES		L-G
VPR	(V)	-/1800/-
MCOV	(V)	550
IN(15 impulses 8/20µs)	(kA)	20
SCCR	(kA)	100
IMAX(8/20µs)	(kA)	40
Iimp(10/350µs)	(kA)	4
Option		
Remote status dry contact electrical rating(Max Voltage)	V	250.0000
Remote status dry contact electrical rating(Max Current)	A	0.5000
RFI Filter		no
Installation		
Wiring type		Screw
Solid wire cross section(Min)	mm <sup>2</sup>	2.5000
Solid Wire cross section(Max)	mm <sup>2</sup>	35.0000
Stranded Wire cross section(Min)	mm <sup>2</sup>	2.5000
Stranded wire cross section(Max)	mm <sup>2</sup>	25.0000
Wire gauge(Min)	AWG	13.0000
Wire gauge(Max)	AWG	2.0000
Torque	Nm	2.0 - 2.5
Torque	in-lbs	17.8 - 22.1
Strip Length	mm	13.0000
Strip Length	in	0.5000
Operating Temperature(Min)	°C	-40.0000
Operating Temperature(Max)	°C	85.0000
Operating Temperature(Min)	°F	-40.0000
Operating Temperature(Max)	°F	85.0000
Operating Relative Humidity(Max)	%RH	95
Operating Altitude(Min)	Ft	2000.0000
Operating Altitude(Max)	Ft	6500.0000
Housing/Enclosure material		Thermoplastic
Flammability rating(UL 94)		V0
Mounting		Din Rail
IP Environmental rating(IP)		IP20
NEMA Environmental rating(NEMA)		NEMA 1
Installation Location		Indoor
Spare part		Module
Product Dimension(L)	mm	99.0000
Product Dimension(H)	mm	67.0000
Product Dimension(W)	mm	18.0000

## DS41S-480

Product Dimension(L)	In	3.8900
Product Dimension(H)	In	2.6400
Product Dimension(W)	In	0.7100
<b>Miscellaneous</b>		
Individual Pack		Yes
Storage Temperature(Min)	°C	-40.0000
Storage Temperature(Max)	°C	85.0000
Storage Temperature(Min)	°F	-40.0000
Storage Temperature(Max)	°F	85.0000
Storage Relative Humidity(Max)	%RH	95.0000
<b>Mechanical Characteristics</b>		
Weight		0.115 kg
TECHNOLOGY		MOV
NETWORK CONFIGURATION		1PH, 2W+G, Single Phase
CONNECTION METHOD		Screw Terminal (8-12AWG)
MOUNTING		DIN RAIL
MATERIAL		Thermoplastic UL94-V0
NEMA RATING (IP RATING)		NEMA 2 (IP20)
FAIL-SAFE BEHAVIOR		Disconnection via fuse-link
REAL-TIME DIAGNOSTICS		Visual indicator and remote contacts
DIMENSIONS		See diagram (mm)
SPARE PART		DSM40-480
<b>Standards</b>		
UL STANDARD		UL1449 5th Edition
UL CATEGORY		VZCA, VZCA7
UL FILE NUMBER		E326289
STANDARDS		NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS		ROHS
<b>Part number</b>		
<b>331011</b>		

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Surge Suppressors](#) category:*

*Click to view products by [Citel](#) manufacturer:*

Other Similar products are found below :

[2800521](#) [GUS11](#) [GUS4](#) [30460](#) [IE103](#) [SRA64C060X](#) [PC642C015](#) [1810-15-A3](#) [2713175](#) [4B06B-EC1-150LF](#) [SRA6LC](#) [CX06M](#) [CCTV1](#)  
[GUS13](#) [GUS14](#) [GUS5](#) [VAL-MS 320/3+0-FM](#) [TTC-6-1X2-M-24DC-UT-I](#) [TTC-6P-1X2-24DC-UT-I](#) [TTC-6P-1X2-M-24DC-UT-I](#) [VAL-](#)  
[SEC-T2-1S-350-FM](#) [VAL-US-120/40/1+1-FM](#) [VAL-US-120/65/1+1-FM](#) [VAL-US-480D/30/3+0-FM](#) [VAL-US-120/40/1+0-FM](#)  
[STCHSP121BT1RU](#) [LP-GTR-NFF](#) [LP-BFDN-CW](#) [LP-STRL-NFF](#) [LP-STRL-DFF](#) [0804111](#) [5053609](#) [5053201](#) [SPD2-150-1P0](#) [SPD2-550-](#)  
[1P0](#) [1-2191595-2](#) [STC-CAT6-P0E-I](#) [SPD2-350-1P0](#) [SPD2-550-3P0](#) [FLT-CP-350-ST](#) [TTC-6P-3-HF-F-M-12DC-UT-I](#) [TTC-6-2X1-24DC-UT](#)  
[LTC4364CMS-1#TRPBF](#) [DS71RS-120](#) [P8AX09-T/MF](#) [CRMJ8-POE-C6](#) [DS42S-48DC](#) [MJ8-CAT6S](#) [DS41S-280](#) [3414.99.0021](#)