

CJDE8404 N-Channel + P-Channel MOSFET

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)MAX}$	I_D
-30V	50mΩ@-10V	-4A
	80mΩ@-4.5V	
30V	50mΩ@10V	5A
	80mΩ@4.5V	



Feature

- Low drain-source ON-resistance
- High forward transfer admittance
- Low leakage current
- Enhancement mode

Application


- Portable equipment
- Motor drive

MARKING:



DE8404 = Device Code
XX = Date Code

Equivalent Circuit



ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
P-MOSFET			
Drain-Source Voltage	V_{DS}	-30	V
Gate-Source Voltage	V_{GS}	±20	V
Continuous Drain Current ⁽¹⁾	I_D	-4	A
Pulsed Drain Current	I_{DM}	-16	A
Power Dissipation	P_D	3	W
N-MOSFET			
Drain-Source Voltage	V_{DS}	30	V
Gate-Source Voltage	V_{GS}	±20	V
Continuous Drain Current	I_D	5	A
Pulsed Drain Current ⁽¹⁾	I_{DM}	20	A
Power Dissipation	P_D	3	W
Temperature and Thermal Resistance			
Thermal Resistance from Junction to Ambient ⁽²⁾	$R_{\theta JA}$	42	°C/W
Junction Temperature	T_J	150	°C
Storage Temperature	T_{STG}	-55~ +150	°C

MOSFET ELECTRICAL CHARACTERISTICS

P-channel MOSFET ELECTRICAL CHARACTERISTICS($T_a=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Static Characteristics						
Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = -250\mu A$	-30			V
Zero gate voltage drain current	I_{DSS}	$V_{DS} = -30V, V_{GS} = 0V$			-1	μA
Gate-body leakage current	I_{GSS}	$V_{GS} = \pm 20V, V_{DS} = 0V$			± 100	nA
Gate threshold voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = -250\mu A$	-1	-1.7	-3.0	V
Drain-source on-resistance ⁽³⁾	$R_{DS(on)}$	$V_{GS} = -10V, I_D = -2.0A$		35	50	m Ω
		$V_{GS} = -4.5V, I_D = -2.0A$		53	80	
Forward transconductance	g_{FS}	$V_{DS} = -5V, I_D = -1.0A$	5			S
Diode forward voltage ⁽³⁾	V_{DS}	$I_S = -1.0A, V_{GS} = 0V$		-0.8	-1.2	V
Dynamic characteristics⁽⁴⁾						
Input Capacitance	C_{iss}	$V_{DS} = -15V, V_{GS} = 0V, F = 1.0MHz$		850		pF
Output Capacitance	C_{oss}			101		
Reverse Transfer Capacitance	C_{rss}			65		
Total gate charge	Q_g	$V_{DS} = -15V, I_D = -4A, V_{GS} = -4.5V$		9.5		nC
Gate-source charge	Q_{gs}			2		
Gate-drain charge	Q_{gd}			3		
Switching Characteristics⁽⁴⁾						
Turn-on delay time	$t_{d(on)}$	$V_{DD} = -15V, I_D = -4A$ $V_{GS} = -10V, R_{GEN} = 6\Omega$		7		nS
Turn-on rise time	t_r			3		
Turn-off delay time	$t_{d(off)}$			20		
Turn-off fall time	t_f			12		

N-channel MOSFET ELECTRICAL CHARACTERISTICS($T_a=25^\circ\text{C}$ unless otherwise noted)







Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Static Characteristics						
Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	30			V
Zero gate voltage drain current	I_{DSS}	$V_{DS} = 30V, V_{GS} = 0V$			1	μA
Gate-body leakage current	I_{GSS}	$V_{GS} = \pm 20V, V_{DS} = 0V$			± 100	nA
Gate threshold voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	1.0	1.3	3.0	V
Drain-source on-resistance ⁽³⁾	$R_{DS(on)}$	$V_{GS} = 10V, I_D = 2.0A$		25	50	m Ω
		$V_{GS} = 4.5V, I_D = 2.0A$		35	80	
Forward transconductance	g_{FS}	$V_{DS} = 5V, I_D = 1.0A$	5			S
Diode Forward voltage ⁽³⁾	V_{DS}	$I_S = 1.0A, V_{GS} = 0V$		0.8	1.2	V
Dynamic characteristics⁽⁴⁾						
Input Capacitance	C_{iss}	$V_{DS} = 15V, V_{GS} = 0V, F = 1.0MHz$		633		pF
Output Capacitance	C_{oss}			65		
Reverse Transfer Capacitance	C_{rss}			55		
Total gate charge	Q_g	$V_{DS} = 15V, I_D = 5.8A, V_{GS} = 4.5V$		9.5		nC
Gate-source charge	Q_{gs}			1.5		
Gate-drain charge	Q_{gd}			3		
Switching Characteristics⁽⁴⁾						
Turn-on delay time	$t_{d(on)}$	$V_{DD} = 15V, R_L = 2.7\Omega$ $V_{GS} = 10V, R_{GEN} = 3\Omega$		3.3		ns
Turn-on rise time	t_r			4.8		
Turn-off delay time	$t_{d(off)}$			26		
Turn-off fall time	t_f			4		

Notes:

1. Repetitive Rating : Pulse width limited by maximum junction temperature.
2. Surface Mounted on FR4 Board, $t < 5$ sec.
3. Pulse Test : Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$.
4. Guaranteed by design, not subject to production testing.







Typical Characteristics

P-Channel MOS

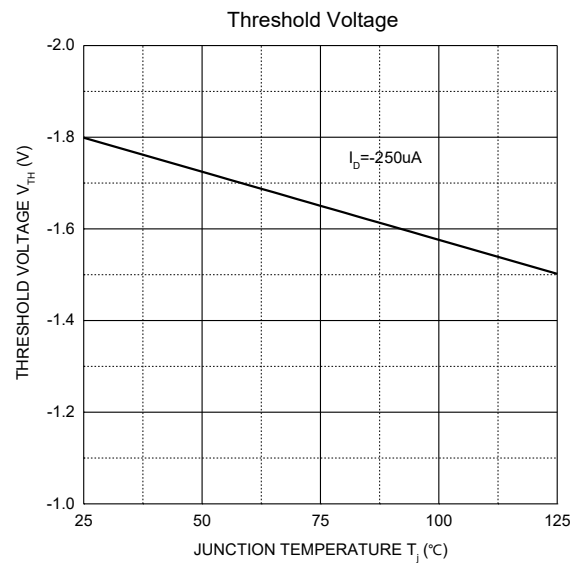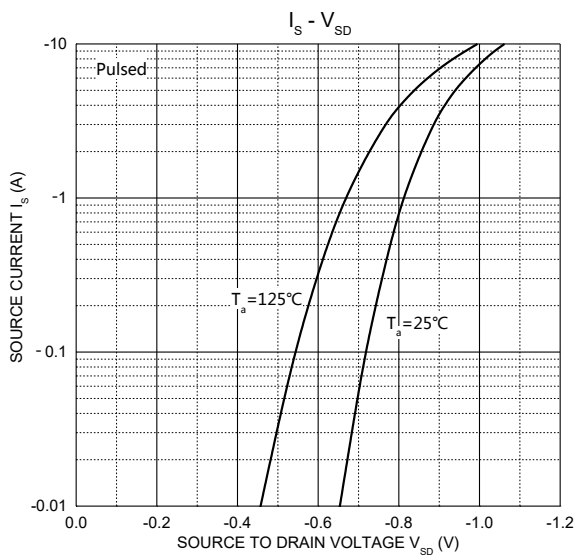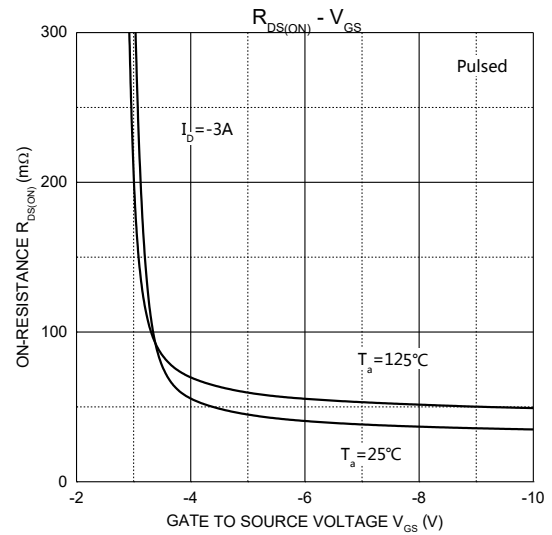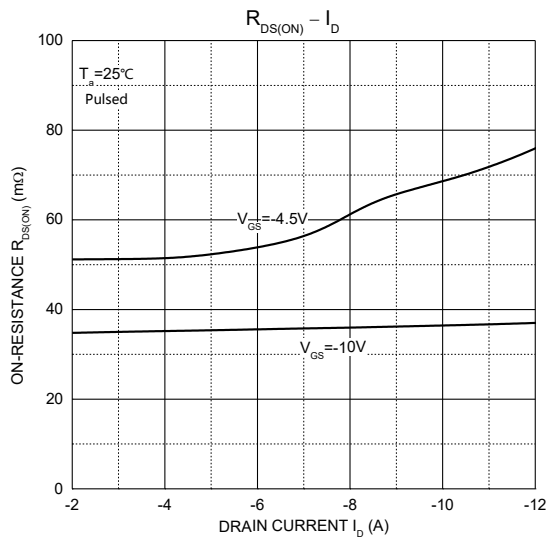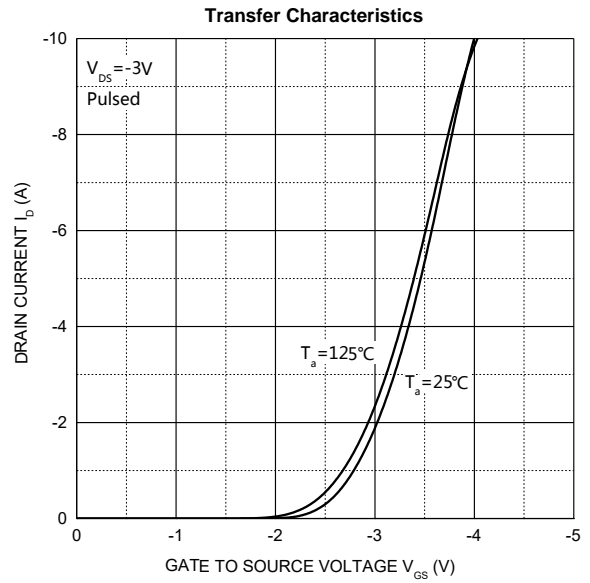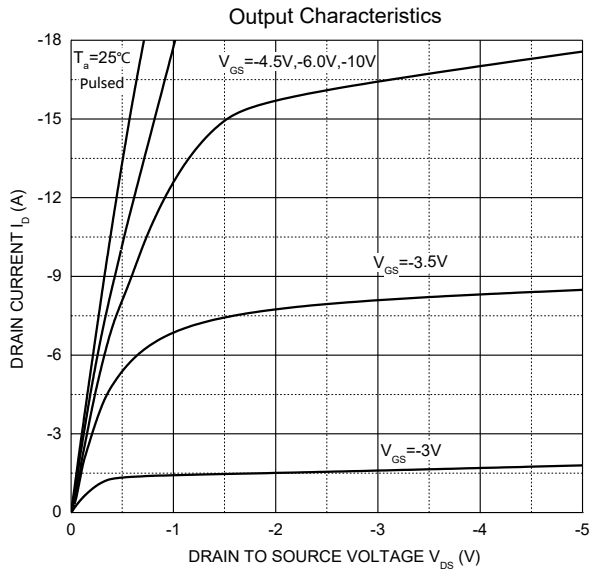


Typical Characteristics

N-Channel MOS

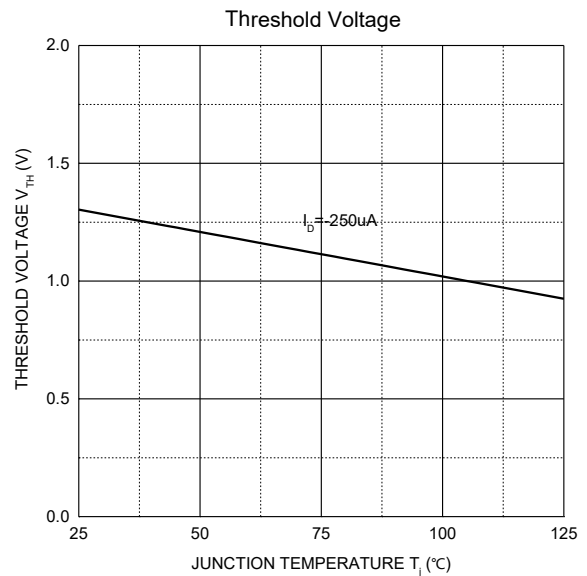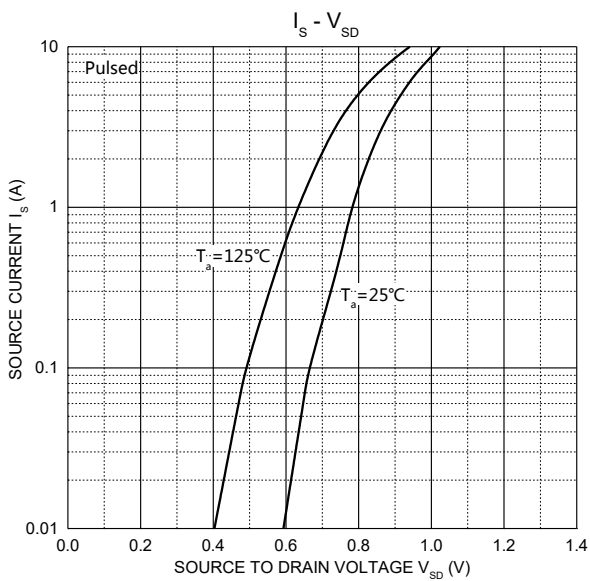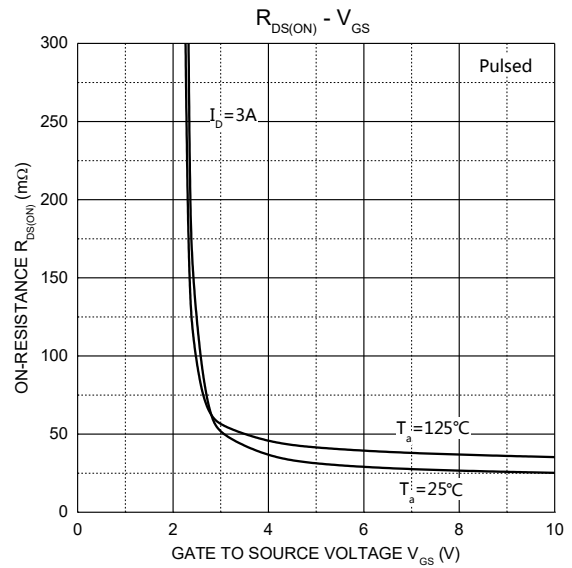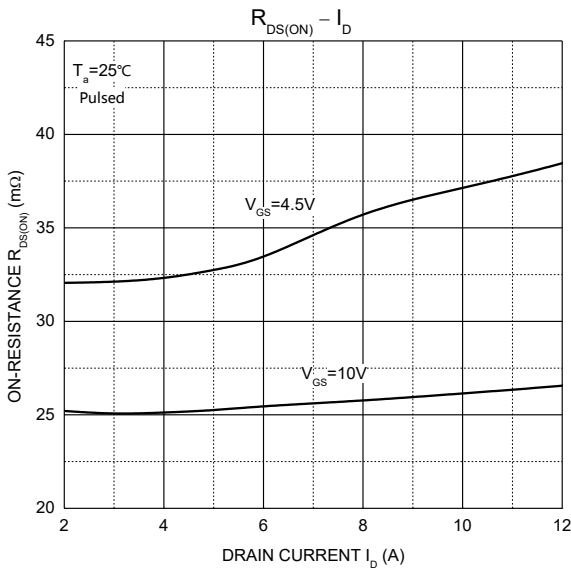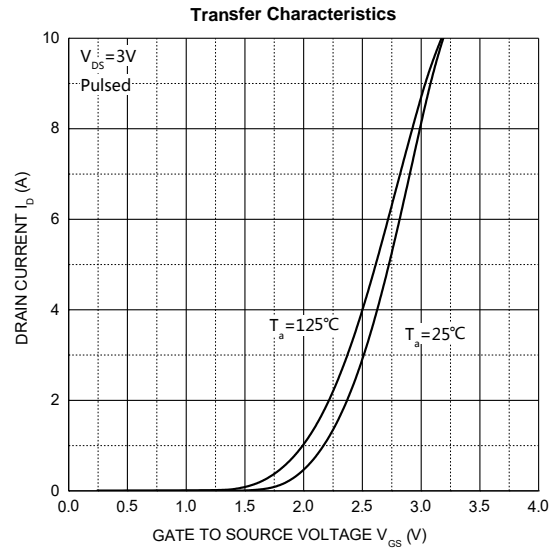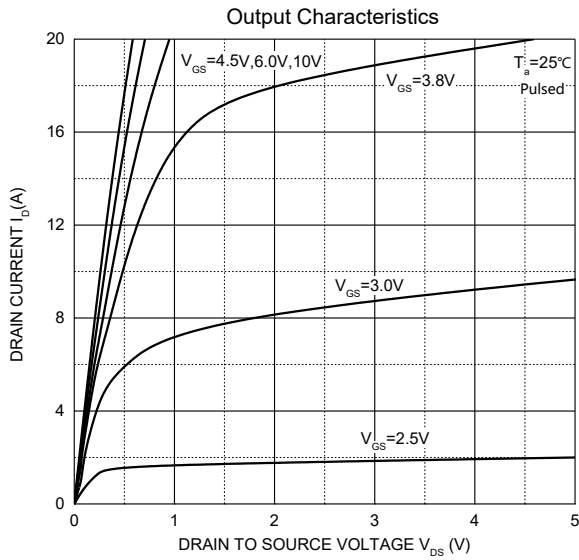

DFNWB3X3-8L-U Package Information

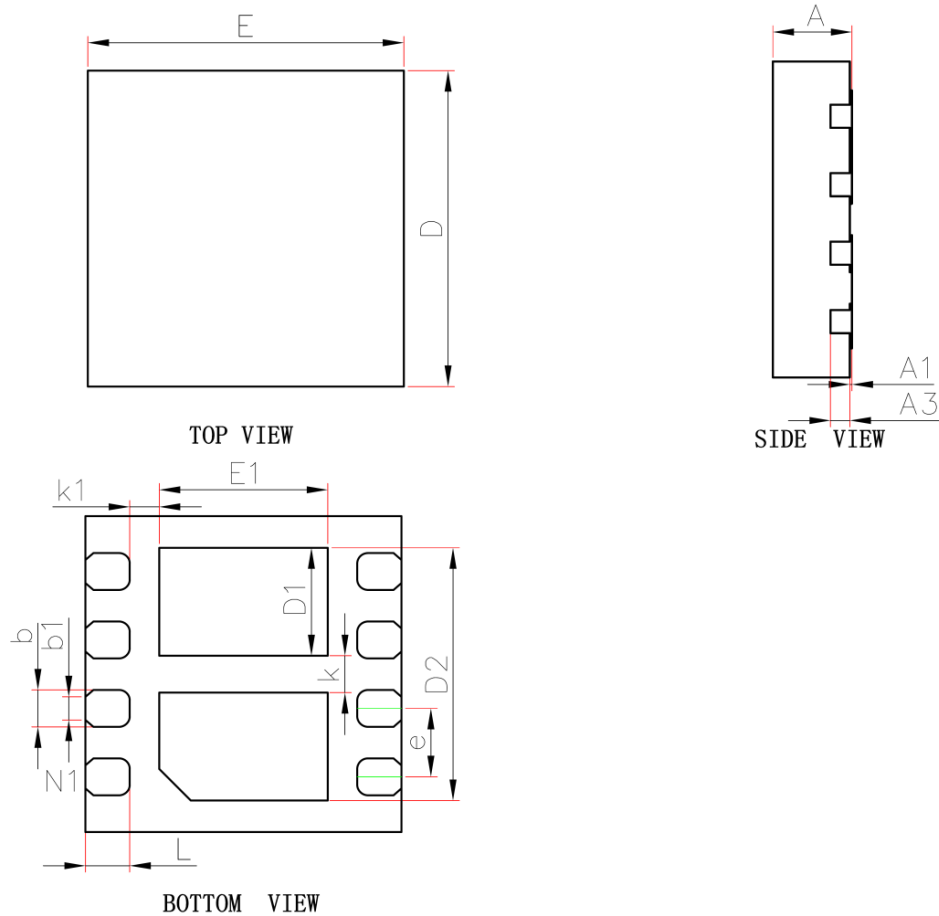

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN.	MAX.	MIN.	MAX.
A	0.700	0.800	0.028	0.031
A1	0.000	0.050	0.000	0.002
A3	0.203REF.		0.008REF.	
D	2.900	3.100	0.114	0.122
E	2.900	3.100	0.114	0.122
D1	0.925	1.125	0.036	0.044
E1	1.500	1.700	0.059	0.067
D2	2.300	2.500	0.091	0.098
b	0.300	0.400	0.012	0.016
b1	0.220REF		0.009REF	
e	0.650BSC.		0.026BSC.	
k	0.350REF		0.014REF	
k1	0.280REF		0.011REF	
L	0.370	0.470	0.015	0.019

NOTICE

JSCJ reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JSCJ does not assume any liability arising out of the application or use of any product described herein.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [CJ](#) manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [FW216A-TL-2W](#) [FW231A-TL-E](#) [APT5010JVR](#) [NTNS3A92PZT5G](#)
[IRF100S201](#) [JANTX2N5237](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [FCA20N60_F109](#) [FDZ595PZ](#) [STD6600NT4G](#) [FSS804-TL-E](#) [2SJ277-DL-E](#)
[2SK1691-DL-E](#) [2SK2545\(Q,T\)](#) [D2294UK](#) [405094E](#) [423220D](#) [MCH6646-TL-E](#) [TPCC8103,L1Q\(CM](#) [367-8430-0972-503](#) [VN1206L](#)
[424134F](#) [026935X](#) [051075F](#) [SBVS138LT1G](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [751625C](#) [873612G](#) [IRF7380TRHR](#)
[IPS70R2K0CEAKMA1](#) [RJK60S3DPP-E0#T2](#) [RJK60S5DPK-M0#T0](#) [APT5010JVFR](#) [APT12031JFLL](#) [APT12040JVR](#) [DMN3404LQ-7](#)
[NTE6400](#) [JANTX2N6796U](#) [JANTX2N6784U](#) [JANTXV2N5416U4](#) [SQM110N05-06L-GE3](#) [SIHF35N60E-GE3](#)