

**2520**

[ 2.5×2.0×0.55 mm ]

**3225**

[ 3.2×2.5×0.70 mm ]



Surface Mount Crystals


Fundamental

Frequency Range

8MHz~125MHz

### Features

- Small size SMD crystal units with 2.5×2.0 (2520), 3.2×2.5 (3225), seam sealed package or glass sealed package.
- The entire package can be grounded via the top metal lid and the bottom pads
- Small footprint. Ideal for space constrained applications
- Exhibits extremely low aging with a high shock & vibration resistance
- Applications: Mobile phone, WI-LAN, Wireless communications, Bluetooth, Clock for MPU, Radio communications, etc.

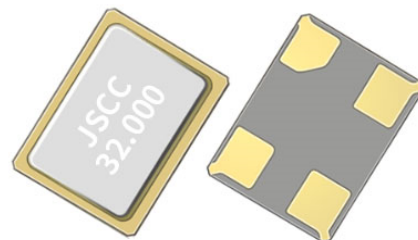

### Standard Specifications

Item / Type	2520	3225
Frequency Range	12~54 MHz (Fund.)	8~125 MHz(Fund.)
Load Capacitance	8pF~32pF, or specify	
Drive Level	100 μW typical	
Frequency Tolerance (at 25°C)	± 10ppm, ±20ppm or ±30ppm (max.)	
Aging	±3ppm / Year (max.)	
Storage Temperature Range	-55°C~+125°C	

### ESR (Equivalent Series Resistance)

2520		3225	
Frequency Range	E.S.R	Frequency Range	E.S.R
12~15.999MHz	150 Ω max.	8~9.9999 MHz	250 Ω max.
16~29.999MHz	100 Ω max.	10~11.999 MHz	200 Ω max.
30~54MHz	70 Ω max.	12~29.999 MHz	80 Ω max.
		30~125 MHz	40 Ω max.

### Frequency stability Vs Operating temperature range

Temp. (°C)	ppm					
	±5	±10	±15	±20	±25	±30
-10~+60	▲	○	○	○	○	○
-20~+70	×	○	○	○	○	○
-40~+85	×	×	○	○	○	○

▲: Conditional  
○: Available  
×: Not available

**2520**

[ 2.5×2.0×0.55 mm ]

**3225**

[ 3.2×2.5×0.70 mm ]



Surface Mount Crystals





Fundamental

Frequency Range





8MHz~125MHz

### Outline Dimensions (Unit: mm)

#### 2520 (2.5×2.0×0.55 mm)



#### 3225 (3.2×2.5×0.70 mm)



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Crystals](#) category:*

*Click to view products by [CJKJ](#) manufacturer:*

Other Similar products are found below :

[CX3225GB25000M0PPSZ1](#) [718-13.2-1](#) [7A-40.000MAAE-T](#) [FL2000085](#) [99-BU](#) [9B-15.360MBBK-B](#) [9C-7.680MBBK-T](#) [H10S-12.000-18-EXT-TR](#) [ABC2-6.000MHZ-D4Z-T](#) [ABLS-20.000MHZ-D2-T](#) [ABS071-32.768KHZ-6-T](#) [R38-32.768-12.5-5PPM-NPB](#) [21U15A-21.4MHZ](#) [RTX-781DF1-S-20.950](#) [LFXTAL066198Cutt](#) [9C-14.31818MBBK-T](#) [A-11.000MHZ-27](#) [ABL-27.000MHZ-B4Y-T](#) [ABM11-132-24.000MHZ-T3](#) [ABM3B1-25.000MHZ-D2Y-T](#) [SPT2A-.032768B](#) [SPT2A.032768G](#) [SSPT7F-9PF20-R](#) [LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [7A-24.576MBBK-T](#) [7B-30.000MBBK-T](#) [CX2520DB16000H0HPQCC](#) [MMCC2R32.7680KHZ](#) [6504-202-1501](#) [6526-202-1501](#) [ABLS-12.000MHZ-B2Y-T](#) [7A-10.000MBBK-T](#) [SG636PCE-20.000MC](#) [3404](#) [CM315D32768EZFT](#) [C1E-24.000-7-2020-R](#) [C1E-19.200-12-1530-X-R](#) [C1E-16.000-12-1530-X-R](#) [ABM11-16.000MHZ-9-B1U-T](#) [FL5000014](#) [EUCA18-3.1872M](#) [FX0800015](#) [425F35E027M0000](#) [FP0800018](#) [MS3V-T1R-32.768kHz-7pF-20PPM-TA-QC-Au](#) [VXM7-1C1-16M000](#) [MS3V-T1R-32.768kHz-9pF-20PPM-TA-QC-Au](#)