RAFIX 16 - Pushbutton, illuminated, protruding collar, square collar 1.30.070.101/1306





General information	
Actuator	protruding collar
Color of lens	transparent red
Form of collar	square
Dimensions	
Collar dimensions	24.95 x 24.95 mm
Collar dimensions	24.95 x 24.95 mm
Overall height	10.9 mm
Mounting depth	44.7 mm
Mounting hole	16.2 mm
Key grid	25 x 25 mm
Machanias design	
Mechanical design	
Mounting	ring nut, max. 1.2 Nm
Contact function	according to contact block
Contact arrangement	according to contact block
Illumination	yes
Mechanical characteristics	
Operating travel	3 mm
Robustness max.	100 N
Other specifications	
Operating life (operations)	2,000,000 cycle
Degree of protection from front side	IP65 (DIN EN 60529)
Operation temperature min.	-25 °C
Ambient temp. operating max. without lamp / LED	+70 °C
Ambient temp. operating max. with lamp /LED	+55 °C
Storage temperature min.	-40 °C
Storage temperature max.	+85 °C
Environmental restistance	acc. to IEC 60068-2-14, -30, -33 and -78
ROHS compliant	yes
REACH compliant	yes


Technical data are approximate and intended solely for general orientation in the selection of a product. Subject to modifications and errors. Images and other graphics may only be similar. For more information, refer to www.rafi.de chapter Imprint / Data Protection.



Panel cut-out



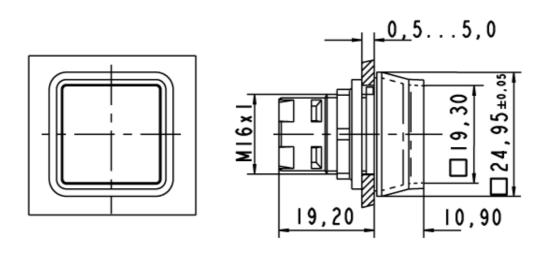



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Switch Actuators category:

Click to view products by C&K manufacturer:

Other Similar products are found below :

 LW1B-A0L
 LW1B-M0
 680-4000-00
 704.012.618
 704.096.0
 704.411.018I
 704.412.0
 704.633.1
 704.730.1
 704.733.0
 862.8102
 G6083

 9PA24
 A0107X
 A019307
 ADC-418G
 12MA7
 ASDHHY-B
 HW1F-3G
 HW1M-L2222
 HW4S-31L
 200-.704-00
 JS-10008
 JS-10083
 JS

 10118
 JS-10133
 JS-10277
 JS-10389
 JS-552
 JS-555
 JS-68
 JS-91
 JS-94
 22-211.011
 9001KXSDC
 92-458.500
 SAPT654133

 2PA3
 SW53AA2
 302561
 LW2L-A0
 3E-10.4
 468-10243-001
 51-030.005
 JM-13
 JS-10120
 JS-138-B
 JS-143-B