


## RAFIX 22 QR - Pushbutton, non-illuminated, flush lens, round collar, plastic front ring, momentary 1.30.240.101/0201




General information	
Form of lens	flat lens
Color of lens	opaque white
Color of front ring	black
Form of collar	round
Dimensions	
Dimensions of collar	ø 29.8 mm
Overall height	9.4 mm
Mounting depth with contact block without cable	56.4 mm
Mounting hole	ø 22.3 mm
Mounting grid	50 x 30 mm
Mechanical design	
Mounting	ring nut
Contact function	momentary
Illumination	no
Mechanical characteristics	
Operating travel	4 mm
Operating force max.	approx. 5 N for 1 switching element
Robustness max.	100 N
Other specifications	
Operating life (operations)	1,000,000 momentary / 500,000 latching cycle
Degree of protection from front side	IP65 (DIN EN 60529)
Ambient temp. operating min.	-25 °C
Ambient temp. operating max.	+70 °C
Storage temperature min.	-40 °C
Storage temperature max.	+80 °C
Environmental restistance	acc. to IEC 60068-2-14, -30, -33 and -78
ROHS compliant	yes
REACH compliant	yes



## Panel cut-out to IEC 60947-5-1

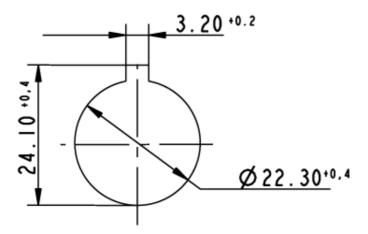



## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Switch Actuators category:

Click to view products by C&K manufacturer:

Other Similar products are found below:

LW1B-A0L LW1B-M0 680-4000-00 704.012.618 704.096.0 704.411.018I 704.412.0 704.633.1 704.730.1 704.733.0 84-1221.7 862.8102

G6083 9PA24 A0107X A019307 ADC-418G 12MA7 ASDHHY-B HW1F-3G HW1M-L2222 HW4S-31L 200-.704-00 JS-10008 JS
10083 JS-10118 JS-10133 JS-10277 JS-10389 JS-150 JS-552 JS-555 JS-68 JS-6-B JS-91 JS-94 22-211.011 9001KXSDC 92-458.500

SAPT654133 2PA3 SW53AA2 302561 LW2L-A0 3E-10.4 468-10243-001 51-030.005 JM-13 JS-10120 JS-138-B