


RAFIX 22 QR - Pushbutton, illuminated, protruding lens, round collar, plastic front ring, momentary 1.30.240.201/1001




General information	
Form of lens	protruding lens
Color of lens	transparent white
Color of front ring	black
Form of collar	round
Dimensions	
Dimensions of collar	ø 29.8 mm
Overall height	12.45 mm
Mounting depth with contact block without cable	56.4 mm
Mounting hole	ø 22.3 mm
Mounting grid	50 x 30 mm
Mechanical design	
Mounting	ring nut
Contact function	momentary
Illumination	yes
Mechanical characteristics	
Operating travel	4 mm
Operating force max.	approx. 5 N for 1 switching element
Robustness max.	100 N
Other specifications	1 000 000 momentens / 500 000 latebies such
Operating life (operations)	1,000,000 momentary / 500,000 latching cycle
Degree of protection from front side	<u>IP65 (DIN EN 60529)</u>
Ambient temp. operating min.	-25 °C
Ambient temp. operating max.	+70 °C
Storage temperature min.	-40 °C
Storage temperature max.	+80 °C
Environmental restistance	acc. to IEC 60068-2-14, -30, -33 and -78
ROHS compliant	yes
REACH compliant	yes



Panel cut-out to IEC 60947-5-1

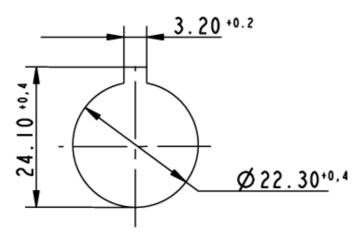



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Pushbutton Switches category:

Click to view products by C&K manufacturer:

Other Similar products are found below :

 8940K2012
 LW1L-M1C10V-A
 LW1L-M1C70-A
 LW2L-A1C20M-GD
 LW2L-M1C20M-A
 60324L
 M22-D-R-GB0/K11
 M7E-HRN2

 67021K512
 67081K512X
 701PB580
 7199K101
 810K12910
 810KSV30B
 MML21EA2ADK
 MML21KA3ABK
 MML23KA3AC05K-001

 MML23KW3AA01W
 8418K2
 8442K3
 8450K1
 860K11911T01A
 861901
 861K11911T01A07
 861K13810T00A14
 861K13911

 8646AB6X718UL
 8646ABUL
 9001KXRK
 907AYY100
 PMHD155A1
 9533CD4+U574+U4922
 95-414.000
 99-450.837
 99-453.837

 PV3H2B0NN-341
 1203MRA
 A22NZBGANGA
 A22NZBNANGA
 A22NZMPATRA
 A2PMA1X03EC56
 A3A-5123-02
 A3A-7140
 A3A-7340

 7310
 A3A-7340
 A3U-TMW-A2C-5M
 A595
 12037A2ULCSA
 ABD122N-B
 1211390004