


RAFIX 22 QR - Pushbutton, non-illuminated, protruding lens, round collar, metal front ring, momentary 1.30.240.321/0500




General information	
Form of lens	protruding lens
Color of lens	opaque green
Color of front ring	silver metallic
Form of collar	round
D	
Dimensions	.000
Dimensions of collar	ø 29.8 mm
Overall height	12.45 mm
Mounting depth with contact block without cable	56.4 mm
Mounting hole	ø 22.3 mm
Mounting grid	50 x 30 mm
Mechanical design	
Mounting	ring nut
Contact function	momentary
Illumination	no
Mechanical characteristics	
Operating travel	4 mm
Operating force max.	approx. 5 N for 1 switching element
Robustness max.	100 N
Other specifications	4.000.000
Operating life (operations)	1,000,000 momentary / 500,000 latching cycle
Degree of protection from front side	IP65 (DIN EN 60529)
Ambient temp. operating min.	-25 °C
Ambient temp. operating max.	+70 °C
Storage temperature min.	-40 °C
Storage temperature max.	+80 °C
Environmental restistance	acc. to IEC 60068-2-14, -30, -33 and -78
ROHS compliant	yes
REACH compliant	yes



Panel cut-out to IEC 60947-5-1

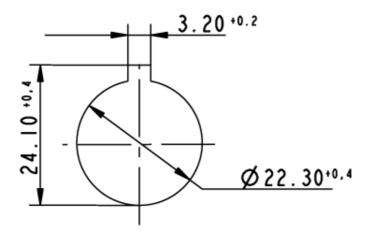



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Pushbutton Switches category:

Click to view products by C&K manufacturer:

Other Similar products are found below:

8940K2012 LW1L-M1C10V-A LW1L-M1C70-A LW2L-A1C20M-GD LW2L-M1C20M-A 60324L M22-D-R-GB0/K11 M7E-HRN2 67021K512 67081K512X 701PB580 7199K101 810K12910 810KSV30B MML21EA2ADK MML21KA3ABK MML23KA3AC05K-001 MML23KW3AA01W 8418K2 8442K3 8450K1 860K11911T01A 861901 861K11911T01A07 861K13810T00A14 861K13911 8646AB6X718UL 8646ABUL 9001KXRK 907AYY100 PMHD155A1 9533CD4+U574+U4922 95-414.000 99-450.837 99-453.837 PV3H2B0NN-341 1203MRA A22NZBGANGA A22NZBNANGA A22NZMPATRA A2PMA1X03EC56 A3A-5123-02 A3A-7140 A3A-7310 A3A-7340 A3U-TMW-A2C-5M A595 12037A2ULCSA ABD122N-B 1211390004