

RAFIX 22 QR - Selector switch, illuminated, round collar, short handle

1.30.242.002/2200

Included: Ring nut with claw.


Other handle marking colors available on request.




General information	
Actuator	handle
Marking of handle	white
Color of front ring	silver metallic
Form of collar	round
Dimensions	
Dimensions of collar	ø 29.8 mm
Overall height	22.2 mm
Mounting depth with contact block without cable	56.4 mm
Mounting hole	ø 22.3 mm
Mounting grid	50 x 30 mm
Diameter of collar	29.8 mm
Mechanical design	
Mounting	ring nut
Contact function	momentary
Illumination	yes
Rotating angle	1 x 40°
Mechanical characteristics	
Operating force max.	approx. 5 N for 1 switching element
Torque max.	2 Nm
Electrical characteristics	
Protection class	<u>II </u>
Other specifications	
Operating life (operations)	500,000 cycle
Degree of protection from front side	IP65 (DIN EN 60529)
Ambient temp. operating min.	-25 °C
Ambient temp. operating max.	+70 °C
Storage temperature min.	-40 °C
Storage temperature max.	+80 °C
Environmental restistance	acc. to IEC 60068-2-14, -30, -33 and -78
ROHS compliant	yes
NOTIS COMPILATION	



Panel cut-out to IEC 60947-5-1

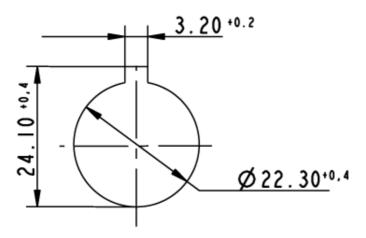





X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Rotary Switches category:

Click to view products by C&K manufacturer:

Other Similar products are found below:

57HS22-02-2-06N 57M22-02B16N 57M22-09A16N 58J1007 58J8A45-01B05N 59M18-02A20N M3786/39-3BA M3786/39-LMC M3786/4-0007 M3786/4-0073 M3786/4-0182 M3786/4-0640 M3786/4-0873 M3786/4-0881 M3786/4-3187 M3786/4-3267 M3786/4-5272 M3786/4-5568 M3786/4-5876 M3786/4-6029 71ESF30-05204N MC06L1NCGF FA201BKGN 84986-26 9003K2C003GA PLR3251 PLR3262 PLR3279 PS3 A019305 A019306 A019501 A029301 A165W-T2AR R2AA2133NNNN R2AA4455NNNN R2BB4455NNNN ACSNO-6123-FB-C6002 RMS1224 DR75-AMSF-10R-B 14-520.0360 BCK1006 1703.3201 HW1MS-0202-101 C6P0206N-A 24002-03S A019109 A029101 A165W-T3MR A22NS-3BM-NRA-G120-NN