

RAFIX 22 QR - Selector switch, non-illuminated, round collar, short handle

1.30.242.701/0201

Included: Ring nut with claw.







General information	
Actuator	handle
Marking of handle	white
Color of front ring	black
Form of collar	round
Dimensions	
Dimensions of collar	ø 29.8 mm
Overall height	22.2 mm
Mounting depth with contact block without cable	56.4 mm
Mounting hole	ø 22.3 mm
Mounting grid	50 x 30 mm
Diameter of collar	29.8 mm
Mechanical design	
Mounting	ring nut
Contact function	latching
Illumination	no
Rotating angle	1 x 90°, form V
Mechanical characteristics	
Operating force max.	approx. 5 N for 1 switching element
Torque max.	2 Nm
Electrical characteristics	
Protection class	<u> </u>
Other specifications	
Operating life (operations)	500,000 cycle
Degree of protection from front side	IP65 (DIN EN 60529)
Ambient temp. operating min.	-25 °C
Ambient temp. operating max.	+70 °C
Storage temperature min.	-40 °C
Storage temperature max.	+80 °C
Environmental restistance	acc. to IEC 60068-2-14, -30, -33 and -78
ROHS compliant	yes
REACH compliant	yes



Panel cut-out to IEC 60947-5-1

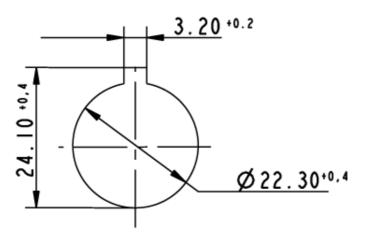





X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Rotary Switches category:

Click to view products by C&K manufacturer:

Other Similar products are found below:

57HS22-02-2-06N 57M22-02B16N 57M22-09A16N M3786/4-0881 M3786/4-3267 M3786/4-5568 M3786/4-6029 71ESF30-05204N MC06L1NCGF 84986-26 9003K2C003GA PLR3251 PLR3262 PS3 A0142M2SP A019605 A029303 R2AA4455NNNN R2BB4455NNNN RMS1224 DR75-AMSF-10R-B 14-520.0360 1703.3201 HW1MS-0202-101 24002-03S A029101 ACSNO-129-YB-C1014 ACSNO-134-RR-YB-C1005 ACSNO-353-SB-C3016 1825537-4 T505 T505E 24005-03N H10207RR01Q M3786/4-0002 M3786/4-0630 M3786/4-1028L M3786/4-1233L M3786/4-3044 M3786/4-3129 M3786/4-5008L M3786/4-5256 MC6CX1A502X009 42HS36-01-1-06N 42P36-03B10S 44MBS60-04-2-03N 44MG90-02-1-02N 50KMT90-01-2-02N 51A22-01-1-16S 51CDP30-01PAJN